



Australian Stainless Steel
Development Assoc.

STAINLESS STEEL STOCK GUIDE

EDITION 9 – OCTOBER/NOVEMBER 2024

A generic stock list of products reported to be regularly available ex stock.
Essential information for anyone designing in stainless steel.



HOW TO USE THIS GUIDE

The ASSDA *Stainless Steel Stock Guide* has been produced from information provided to ASSDA by suppliers and is intended as a general indication of common availability only. ASSDA does not warrant the accuracy or completeness of the information contained in the Guide, does not warrant the availability of any particular product and does not accept any liability for errors or omissions in the Guide or the unavailability of particular products.

In addition to the products listed in this Guide, other products are available but stocked less frequently. Australian suppliers have the capacity to tailor many products to individual specifications. Special product runs can be arranged provided sufficient time is allowed. Please contact your local supplier for details. A list of suppliers is provided on the Australian Stainless Steel Development Association's website – www.assda.asn.au.

Specifiers are urged to use this Guide and, where appropriate, consult with suppliers at an early stage in any project. The use of ex-stock or readily sourced products is likely to be of significant benefit to any project.

STAINLESS STEEL

Alloy steels contain, by weight, 1.2% or less of carbon and 10.5% or more of chromium with or without other elements. Iron must be the predominant element. Detailed technical information on stainless steels is given on the ASSDA website and in ASSDA publications. Particularly relevant information for specifiers and users is given in the ASSDA's *Australian Stainless Reference Manual*. Stainless steel suppliers also have information which complements advice from ASSDA.

AUSTRALIAN STAINLESS STEEL DEVELOPMENT ASSOCIATION

Level 6, 200 Adelaide St, Brisbane QLD, Australia 4000
+61 7 3220 0722 \ assda@assda.asn.au \ assda.asn.au
ABN 18 061 226 051

DISCLAIMER

The technical information contained in this publication should not be relied on for specific applications without first securing competent advice. Whilst all care is taken to ensure that information contained herein is accurate and up-to-date, ASSDA does not warrant its accuracy or completeness and does not accept liability for errors or omissions.

COPYRIGHT

All rights reserved. No part of this publication may be reproduced or distributed in any form or by any means, or stored in a database retrieval system, without prior permission from ASSDA.

© 2024

CONTENTS

ABBREVIATIONS	4	PIPE AND TUBE FITTINGS	82
COIL, SHEET AND PLATE	6	PIPE BUTT WELDED FITTINGS	84
COIL	8	PIPE SOCKET WELD 3000lbs FITTINGS.....	86
SHEET	12	PIPE SCREWED 150lbs FITTINGS (316/L)	86
COLOURED SHEET	17	PIPE SCREWED HIGH PRESSURE FITTINGS (316/L)	87
PLATE.....	19	FLANGES.....	88
PERFORATED SHEET: GRADE 304 AND 316	23	RECESSED RING JOINT TYPE UNIONS AND OTHER COMPONENTS (AS 1528.2: SECTION 2).....	95
SAFETY FLOORING PRODUCTS	25	TRAPEZOIDAL THREAD TYPE SCREWED COUPLINGS AND OTHER COMPONENTS: IDF/ISO TYPE (AS 1528.2: SECTION 3)	95
SAFETY FLOORING.....	27	CLAMP TUBE UNIONS AND OTHER COMPONENTS (AS 1528.4).....	95
BAR.....	28	PROPRIETARY TUBE COMPRESSION FITTINGS (316/L)	96
ROUND BAR	30	TUBE BUTT WELDED FITTINGS (AS 1528.3) [1/2].....	97
HOLLOW BAR: GRADE 316.....	35	TUBE BUTT WELDED FITTINGS (AS 1528.3) [2/2]	98
HEXAGONAL BAR	37	FASTENERS	99
SQUARE BAR	37	BOLTS	103
FLAT BAR.....	38	NUTS	116
EQUAL ANGLE BAR	39	SCREWS	124
UNEQUAL ANGLE BAR: GRADE 316	39	STAINLESS STEEL INDUSTRY DIRECTORY	165
CHANNELS: GRADE 316	40	ADVERTISERS' INDEX	169
REINFORCING BAR (REBAR)	40		
WIRE AND WIRE ROPE	41		
GENERAL ENGINEERING WIRE	44		
WIRE ROPE	46		
WIRE ROPE FITTINGS.....	49		
CHAIN	50		
MESH	51		
WOVEN.....	53		
WEAVE MESH FOR FOOD CONTACT APPLICATIONS	57		
WELDED.....	58		
BOLTING CLOTH FOR SIFTING AND SCREENING APPLICATIONS.....	60		
ARCHITECTURAL CABLE MESH: GRADE 316 & 2205 DUPLEX	62		
PIPE AND TUBE	65		
PIPE	69		
ROUND TUBE	74		
316L PHARMACEUTICAL GRADE TUBE AND FITTINGS ...	78		
OVAL TUBE	79		
SQUARE TUBE.....	79		
RECTANGULAR TUBE.....	81		

ABBREVIATIONS

ANN	Annealed
AW	As Welded
AWBP	As Welded Buff Polished
BA	Bright Annealed
BD	Bright Drawn
CD	Cold Drawn
CF	Cold Finished (cold drawn or smooth turned)
CG	Centreless Ground
CW	Cold Worked
CWA	Cold Worked Annealed
DN	Diameter Nominal
DSC	Drawn Seamless Coil
H&T	Hardened and Tempered
HRA	Hot Rolled, Annealed
HRAP	Hot Rolled, Annealed And Pickled (also referred to as No. 1)
POL	Polished
PC	Polyethylene (PE) Coated
RT	Rough Turned
SMLS	Seamless
SRE	Slit Rolled Edge
ST	Spring Temper
WLD	Welded
2B	Cold Rolled with Polished Rollers, Annealed, Pickled and Lightly Re-rolled

METRIC OR IMPERIAL?

Both metric and imperial sized products are available in the Australian market. In some products, both sizes are available. In other products, only the metric or only the imperial sizes are commonly available.

Where there are metric and imperial sizes that are very close it is possible that both will not always be available. It is recommended that stockists be consulted at an early stage where exact sized product is required.

Some examples are provided below.

Flat Product

Ordering at standard width and thickness is the best way to keep steel costs down. Each mill has equipment capable of a certain maximum width and running narrower steel is less productive. The standard width varies from mill to mill, with most European mills following the metric system and mills in Asia using imperial widths. The following table shows the comparison:

COMMONLY AVAILABLE FLAT PRODUCT WIDTHS FROM STAINLESS MILLS

WIDTH (mm)	EUROPE	ASIA
900	X	X
914	X	✓
1000	✓	X
1200	X	X
1219	X	✓
1250	✓	X
1500	✓	X
1524	X	✓
2000	✓	✓

✓ = READILY AVAILABLE

X = SOMETIMES (BUT NOT READILY) AVAILABLE

Round bar

Round bar is commonly available in imperial sizes, e.g. 15.88 mm, but may also be available in hard metric sizes, e.g. 16.00 mm diameter.

In some product areas, particularly flat product, the metric size appears and is taken to include the closest imperial measurement. Users of this Guide are strongly advised to contact their supplier to determine available sizes at an early stage in the design process.

DUAL CERTIFIED?

Product in grades 304 and 316 is often available ex-stock in "dual certified" 304/304L and 316/316L form. This is particularly so for plate, pipe and bar. This means it has the low carbon chemistry of the L grade while retaining the strength of the standard carbon grade. Stockists should be consulted for further information.

COIL, SHEET AND PLATE



COIL, SHEET AND PLATE

Product Description

Flat product up to and including 4.75 mm in thickness, with a 2B, 2D or BA finish, is referred to as sheet although it may be delivered in coils or as flat sheet. Plate is flat product greater than 4.75 mm thick with a No. 1 finish; 2B finish may be available in some products up to 8.00 mm.

This Guide lists cold rolled products (generally 2B, BA or No. 4 finish) as "Coil" or "Sheet", and hot rolled products (No. 1 / HRAP finish) as "Plate". Dimensional tolerances and surface roughness are determined by the production process - hot or cold rolled - not by the description of Coil or Plate.

Cut-to-length processing lines allow custom lengths of sheet or plate (up to 13,000 mm) to be produced from ex-stock coil.

Relevant Standards

ASTM A240/A240M	Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels and for General Applications.
ASTM A480/A480M	General Requirements for Flat Rolled Stainless and Heat-Resisting Steel Plate, Sheet and Strip.
ASTM A666	Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
ASTM A895	Free-Machining Stainless Steel Plate, Sheet, and Strip.
EN/ISO 9445	Continuously Cold-Rolled Stainless Steel - Tolerances on Dimensions and Form.
EN 10028-7	Flat Products Made of Stainless for Pressure Purposes - Stainless Steels.
EN 10029	Hot-Rolled Steel Plates 3 mm Thick or Above - Tolerances on Dimensions and Shape.
EN 10088-2	Stainless Steels. Technical Delivery Conditions for Sheet/Plate and Strip for General Purposes.

STAINLESS STEEL COIL

THICKNESS (mm)	WIDTH (mm)	304 2B	304 No. 4 PC	304 BA PC	304 HRAP	304L HRAP CHEQUER PLATE	316/316L 2B	316 No. 4 PC	316L HRAP	321 2B	321 HRAP	430 BA PC	430 2B	430 No. 4 PC	F.SUB 304# 2B	F.SUB 304# No. 4 PC	F.SUB 316# 2B	F.SUB 316# No. 4 PC	LEAN DUPLEX	2205 2B	12% Cr FERRITIC**	253 MA
0.45	914	•					•															
	1219	•					•					•										
0.50	914	•										•										
	1219	•					•					•										
0.55	914	•		•			•					•										
	1000	•																				
	1219	•					•					•			•	•	•	•				
0.60	1000												•	•								
0.70	914	•	•	•			•					•		•	•	•						
	1219	•	•	•			•					•		•	•	•	•	•				
0.90	600	•	•																			
	750	•	•									•		•								
	914	•	•				•					•		•	•	•	•					
	1000												•	•								
	1219	•	•	•			•	•				•	•	•	•	•	•	•				•
1.20	600	•	•																			
	750	•	•																			
	914	•	•									•		•	•	•						
	1000	•	•																			
	1219	•	•	•			•	•		•		•	•	•	•	•	•	•				•
	1500*	•	•				•	•														
1.50/1.60	914	•	•				•															
	1000	•	•				•	•														
	1219	•	•	•			•	•		•					•	•	•	•				•
	1250																		•			•
	1500*	•	•				•	•													•	
	2000																				•	
2.00	914	•	•				•															
	1219	•	•				•	•		•					•	•	•	•			•	•
	1250									•									•			•
	1500*	•	•				•	•		•											•	•
	2000	•					•														•	•
2.50	914	•																				
	1219	•					•										•	•				•
	1500*	•					•															
3.00	914	•					•															
	1219	•	•				•	•		•							•	•				•
	1250									•												•
	1500*	•	•				•	•		•	•										•	•
	2000	•					•												•		•	•
3.50	1220					•																
4.00	1219	•					•															
	1500*	•			•		•		•													•
	2000	•			•		•		•												•	•

This table continues on page 10.

Ferritic stainless steel as a substitute for 304/316. Contact ASSDA for further details.
 * This size also covers the closest imperial measurement (1524 mm). Check with your stockist for availability. For more information on metric and imperial sizing, see page 5.
 ** This includes 1.4003 and proprietary grades 3Cr12 and 5Cr12

STRETCHER LEVELLERS



At Midway Metals, we pride ourselves on quality and innovation. We're constantly upgrading our products and services to meet and exceed market expectations.

We have two state of the art stretcher levellers at our Coil Service Centres in Melbourne and Brisbane. The ability to produce perfectly flat material is not the only benefit of Midway Metals stretcher leveller technology. See below the various features and benefits that set stretcher levelling apart from other inferior alternatives.

- Stretches material top to bottom and edge to edge to exceed yield point with no reduction to thickness
- Resets internal stresses from milling process for perfectly flat sheets
- Does not affect the quality or molecular composition of the material
- Eliminates edge wave and centre buckle, from material not properly coiled at the mill
- Ability to PE coat double side and not affect or mark material when stretching
- Thickness range: 0.45mm to 10mm
- Width range: 152mm to 2,210mm



Midway Metals

Reliability through capability

Albury	02 6041 4000
Brisbane	07 3382 9500
Melbourne	03 9791 5111
Newcastle	02 4088 2600
Perth	08 9248 6944
Sydney	02 9670 8900
Townsville	07 4728 8777



Pipe | Tube | Bar | Fittings | Flanges | Valves
Welding Consumables | Cleaning Chemicals

midwaymetals.com.au

STAINLESS STEEL COIL (CONTINUED)

THICKNESS (mm)	WIDTH (mm)	304 2B	304 No. 4 PC	304 BA PC	304 HRAP	304L HRAP CHEQUER PLATE	316/316L 2B	316 No. 4 PC	316L HRAP	321 2B	321 HRAP	430 BA PC	430 2B	430 No. 4 PC	F.SUB 304# 2B	F.SUB 304# No. 4 PC	F.SUB 316# 2B	F.SUB 316# No. 4 PC	LEAN DUPLEX	2205 2B	12% Cr FERRITIC**	253 MA	
4.50	1220					•																	
	1524					•																	
5.00	1219	•			•		•		•														
	1250																					•	
	1500*	•			•		•		•	•	•											•	
6.00	2000	•			•		•		•	•	•											•	
	1219	•			•	•	•		•														
	1250																					•	
	1500*	•			•		•		•	•	•											•	
	2000	•			•		•		•	•	•											•	
8.00	1219				•				•														
	1500*	•			•		•		•													•	
	2000	•			•				•														
10.00	1219				•				•		•												
	1500*				•				•		•												
	2000				•				•		•												

Ferritic stainless steel as a substitute for 304/316. Contact ASSDA for further details.

* This size also covers the closest imperial measurement (1524 mm). Check with your stockist for availability. For more information on metric and imperial sizing, see page 5.

** This includes 1.4003 and proprietary grades 3Cr12 and 5Cr12

Need reliability and confidence more than ever?

Choose Australian-processed stainless steel – for projects that shine.



At Midway Metals, we're proud to help Australian businesses and manufacturers shine.

Our national network of processing, warehousing and delivery facilities can provide exactly what you need, when you need it, for any project size.

Our advanced technology can cut, slit, polish and coat coils and sheets to suit – with faster turnaround, on-schedule delivery, premium materials and homegrown efficiency.

We process and produce:

- sheets
- plates
- coils
- slit bands
- polished sheets and coils – no.4, low RA and enhanced brush
- flat bars.

In addition, we


- plasma cut and drill plates to size
- band saw cut long products to length
- manufacture plate flanges to AS2129, AS4087 and other standards on our CNC machines.



Midway Metals

Reliability through capability

Albury	02 6041 4000
Brisbane	07 3382 9500
Melbourne	03 9791 5111
Newcastle	02 4088 2600
Perth	08 9248 6944
Sydney	02 9670 8900
Townsville	07 4728 8777

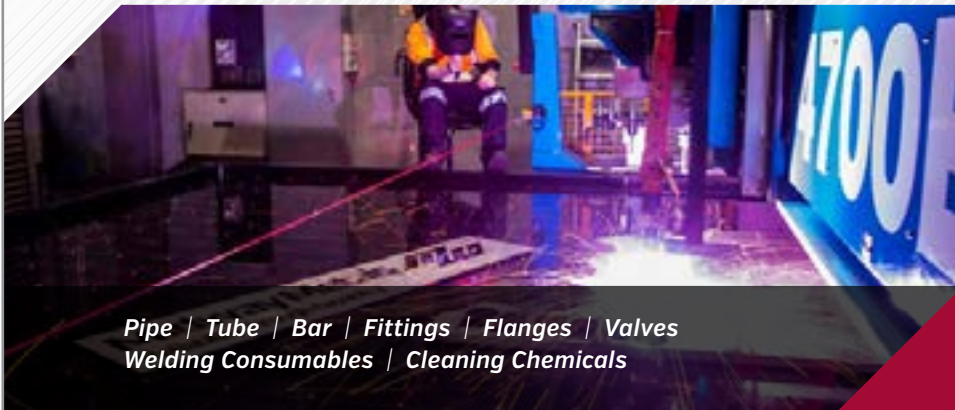

Pipe | Tube | Bar | Fittings | Flanges | Valves
Welding Consumables | Cleaning Chemicals

midwaymetals.com.au

STAINLESS STEEL SHEET

THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)*	304 2B	304 No. 4 PC	304 BA PC	304 No. 8	316/316L 2B	316 No. 4 PC	316 No. 8	321 2B	430 No. 4 PC	430 BA PC	F.SUB 304# 2B	F.SUB 304# No. 4 PC	F.SUB 316# 2B	F.SUB 316# No. 4 PC	LEAN DUPLEX	2205 2B	12% Cr FERRITIC**	253 MA
0.45	914	1800	•																	
		2400	•	•																
	1219	1800	•				•													
		2400	•	•			•					•								
0.55	914	1800	•	•								•								
		2400	•	•																
	1219	1800	•	•			•													
		2400	•	•			•	•				•	•	•	•	•				
0.70	914	1800	•	•							•	•								
		2400	•	•							•	•								
	1219	1800	•	•			•					•								
		2400	•	•			•	•			•	•	•	•	•	•				
		3000	•	•							•									
0.90	914	1800	•	•			•	•			•	•								
		2400	•	•							•			•						
	1219	1800	•	•			•				•	•								
		2400	•	•	•		•	•			•	•	•	•	•	•				
		3000	•	•			•							•	•	•				
		3600	•	•										•	•	•				
	1500	3000		•																
1.00	1219	2438		•		•			•											
1.20	750	3000		•																
	914	1800	•	•			•	•												
		2400	•	•			•							•						
		3000	•	•																
		3600		•																
	1000	3000		•																
		4000		•																
		5000		•																
	1219	1800	•	•			•							•	•	•				
		2400	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
		3000	•	•		•								•	•	•				
		3600		•										•	•	•				
		4000		•																
		5000		•																

This table continues on page 14.

* This size also covers the closest imperial measurement (1524 mm). Check with your stockist for availability. For more information on metric and imperial sizing, see page 5.

Ferritic stainless steel as a substitute for grade 304/316

** This includes 1.4003 and proprietary grades 3Cr12 and 5Cr12

Cold rolled product, i.e. 2B finish, is less usual above 6 mm thickness. HRAP (No. 1) finish is found in plate product.

No.4 sheet (coil) is commonly stocked and supplied with a protective laser film coating, predominantly for laser cutting processing.

Refer to ASSDA's *Australian Stainless Reference Manual* for mass calculations and density differences between austenitic, ferritic and duplex stainless steel.

For details of dimensional tolerances, refer to applicable standards.

This table is a guide only and should not be used to determine availability of product. Call your supplier or ASSDA to determine availability.



Precision Cutting & Fabrication

YOUR ONE-STOP SHOP FOR STAINLESS STEEL AND ALUMINUM SOLUTIONS



Our ISO 9001 certification ensures consistent, reliable, and customer-focused processes.



Unlock your Project's Full Potential with Precision Cutting & Fabrication



**Fibre Laser Cutting
(Sheet/Plate)**



**Tube and Pipe
Profile Cutting**



**Sheet Folding and
Tube Bending**



**Tig and Spot
Welding**



07 5609 7700

emerylaser.com.au

sales@emerylaser.com.au

STAINLESS STEEL SHEET (CONTINUED)

THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)*	304 2B	304 No. 4 PC	304 BA PC	304 No. 8	316/ 316L 2B	316 No. 4 PC	316 No. 8	321 2B	430 No. 4 PC	430 BA PC	F.SUB 304# 2B	F.SUB 304# No. 4 PC	F.SUB 316# 2B	F.SUB 316# No. 4 PC	LEAN DUPLEX	2205 2B	12% Cr FERRITIC**	253 MA
	1500*	2400		•				•												
		3000	•	•			•	•												
		3600		•																
		4000		•																
1.50/1.60	914	1800	•	•			•													
		2400	•	•			•													
		3000		•																
		3600	•	•																
	1000	3000		•																
		4000		•																
		5000		•																
	1219	2400	•	•	•	•	•	•	•	•			•	•	•	•			•	
		3000	•	•	•	•	•	•					•	•	•	•			•	
		3600		•			•							•	•	•				
		4000		•																
		5000		•																
	1250	2500															•			•
	1500*	2400	•	•			•	•												
		3000	•	•			•	•										•		
		3600		•																
		4000		•																
2.00	914	1800	•	•			•													
		2400	•	•			•													
		3000	•																	
	1219	1800	•	•			•													
		2400	•	•		•	•	•	•	•			•	•	•	•			•	
		3000	•	•		•	•						•	•					•	
	1250	2500															•		•	
	1500*	2400	•	•			•			•										
		3000	•	•			•			•								•	•	
	2000	3000	•															•		•
		4000	•				•													
2.50	914	1800	•																	
		2400	•																	
	1219	1800	•	•																
		2400	•	•			•								•	•				
		3000	•	•																
	1500*	3000	•				•													

STAINLESS STEEL SHEET (CONTINUED)

THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)*	304 2B	304 No. 4 PC	304 BA PC	304 No. 8	316/316L 2B	316 No. 4 PC	316 No. 8	321 2B	430 No. 4 PC	430 BA PC	F.SUB 304# 2B	F.SUB 304# No. 4 PC	F.SUB 316# 2B	F.SUB 316# No. 4 PC	LEAN DUPLEX	2205 2B	12% Cr FERRITIC**	253 MA		
3.00	914	1800	•				•															
		2400	•				•															
	1219	1800	•	•			•															
		2400	•	•			•	•		•					•	•			•			
	1250	2500																	•		•	
			2400					•														
		1500*	2438					•														
			3000	•	•			•			•									•	•	
			6000	•				•			•									•	•	
		2000	3000					•										•				
	4.00	1219	2400	•				•													•	
			1500*	3000	•				•													
		6000	•				•															
		2000	6000	•				•														



AUSTRALIAN STAINLESS DISTRIBUTORS

▶ stainlesssteelasd.com.au

Together with our extensive product knowledge we aim to offer fast, accurate and reliable service ensuring our products are supplied to the highest standards at competitive prices.

For all of your **Stainless Steel** and **Aluminium** needs:

Coil / Sheet / Plate / Bar / Tube
Pipe / Fittings / Treadplate



MELBOURNE

Phone: (03) 9799 8188
Email: stainless@asdsales.com.au
44 Commercial Drive, Lynbrook, Vic. 3975



BRISBANE

Phone: (07) 3266 6211
Email: stainless.qld@asdsales.com.au
53 Beal Street, Meadowbrook, Qld. 4131

COLOURED STAINLESS STEEL SHEET

THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)*	BLACK SAND BLAST	BLACK BEAD BLAST	BLACK MIRROR	BLACK SATIN	BLACK HAIRLINE	BLUE MIRROR	BLUE SATIN	BLUE HAIRLINE	BRONZE SCOTCH BRITE	BRONZE LINEN	BRONZE BEAD BLAST	BRONZE MIRROR	BRONZE SATIN	BRONZE HAIRLINE	CHAMPAGNE BEAD BLAST	CHAMPAGNE MIRROR	CHAMPAGNE SATIN	CHAMPAGNE HAIRLINE	COPPER SAND BLAST	COPPER BEAD BLAST	COPPER MIRROR	COPPER SATIN	GOLD LINEN	GOLD BEAD BLAST	GOLD MIRROR	GOLD SATIN	GOLD HAIRLINE	GREEN MIRROR	GREY SATIN	PINK MIRROR	PINK HAIRLINE	ROSE GOLD HAIRLINE	ROSE GOLD MIRROR	ROSE RED NO.4 FINISH	ROSE RED MIRROR					
0.80	914	1800																																								
		2400																																								
		3000	•																																							
	1220	1800																																								
		2400				•																																				
		3000	•																																							
	1250	2500			•	•	•		•			•	•	•	•	•	•	•	•	•							•	•	•	•		•										
		3000			•	•	•		•		•			•	•	•	•	•	•	•								•	•	•	•		•									
		3600																																								
	1.00	914	1800																																							
			2400																																							
			3000	•	•	•											•							•	•	•	•															
1220		1800																																								
		2400				•			•													•																				
		3000	•	•	•											•							•	•	•	•																
1250		2500			•																																					
		3000																																								
		3600																																								
1.20		914	1800																																							
			2400																																							
			3000	•																																						
	1219	2500																																								
		3250	•																																							
		3600																																								
	1220	1800																																								
		2400		•	•	•																																				
		3000		•	•									•	•	•	•	•	•	•																						
		3200																																								
		3600				•																																				
		1250	2500																																							
1250	3000																																									
	3600																																									
	3000																																									

* There is overlap across imperial and metric equivalents i.e. 1500 mm and 1524 mm.
 Substrate grade generally 304, but 316 is also available.
 Anti-fingerprint coatings are available for some sizes/colours.
 Coating is typically by PVD (Physical Vapour Deposition).

Did you know that nickel can be recycled without loss of quality ?

Nickel is fully recyclable. It can be reprocessed over and over again without losing its properties. Recycling is an important factor in nickel's life cycle and an important contributor to global sustainability. Nickel-containing products, such as stainless steel and batteries, are durable and designed for long-term use.

Demand for recycled nickel is growing; it is part of the solution as a complement to primary production.

Recycling nickel not only conserves natural resources but also reduces energy consumption and greenhouse gas emissions. As nickel-containing products have value, there is an infrastructure for gathering and processing them. Gathering, sorting, preparing, transporting and using scrap metal generates significant employment and adds economic value.

NICKEL

Part of the solution for a sustainable future

The Nickel Institute is the global association of leading primary nickel producers. Our mission is to promote and support the proper use of nickel in appropriate applications. We share our knowledge, offering free technical advice about nickel, its properties and its uses to ensure optimum performance, safe handling and use.



NICKEL magazine

features new and existing applications of nickel and nickel steels, alloys and compounds from around the world.



Free TECHNICAL LIBRARY

Our website contains a library with > 250 technical publications on nickel and stainless steel.



Ask the EXPERTS

Our team of technical experts are on hand to answer your questions on a wide range of end-use sectors.



#CHRONICKELS

Our blog features regular posts from people who know about nickel.

WWW.NICKELINSTITUTE.ORG

Nickel
INSTITUTE
knowledge for a brighter future


STAINLESS STEEL PLATE

THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	304/304L 2B	304/304L HRAP	316/316L 2B	316/316L HRAP	321 HRAP	LEAN DUPLEX HRAP	DUPLEX HRAP	3CR12/5CR12 HRAP	253MA HRAP
3.00	1500	6000	•		•						
	2000	3000	•		•						
		4000	•		•						
		6000	•		•						
4.00	1219	2438	•		•						
	1500	3000	•		•						
		6000	•		•						
	2000	6000	•		•						
5.00	1219	2438	•	•	•	•				•	
	1500	3000	•	•	•	•				•	
		6000	•	•	•	•	•	•	•	•	
	2000	6000	•	•	•	•	•	•	•	•	
6.00	1219	2439	•	•	•	•				•	•
	1500	3000	•	•	•	•				•	•
		6000	•	•	•	•				•	•
	2000	6000	•	•	•	•	•	•	•	•	•
	2500	6000		•		•					
		8000		•		•					
8.00	1219	2438		•		•					
	1500	3000	•	•	•	•					
		6000	•	•	•	•	•			•	
	2000	6000	•	•	•	•	•	•	•	•	•
	2500	6000		•		•					
	3000	7500		•		•					
10.00	1219	2438		•		•					
	1500	3000		•		•					
		4000		•		•					
		6000		•		•	•			•	
	2000	6000		•		•	•	•	•	•	
	2500	7500		•		•				•	
	3000	7500		•		•					
12.00	1219	2438		•		•					
	1500	3000		•		•					
		4000		•		•					
		6000		•		•					
	2000	6000		•		•	•	•	•	•	•
	2500	7500		•		•				•	
	3000	7500		•		•					

This table continues on next page.

* No. 1 finish (HRAP) is standard. 2B finish may be available in thicknesses up to about 8.00 mm.
NB Sizes also cover the closest imperial measurement. For more information see page 5.

ACERINOX

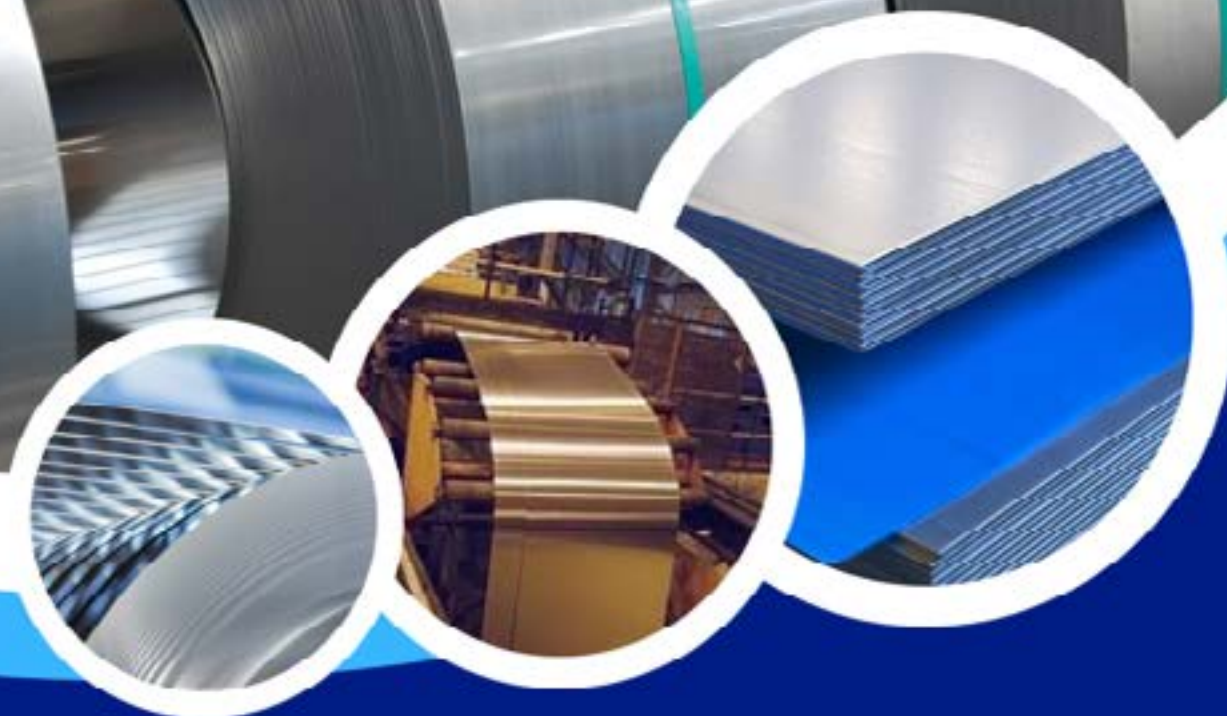

The widest range of stainless steel products and solutions for your project.

DUPLEX

- 2001/1.4482, 2304/1.4362
- 2205/1.4462

AUSTENITIC

- 304/1.4301, 321/1.4541, 202
- 316L/1.4404, 316Ti/1.4571, 1.4436
- 309S/1.4833, 310S/1.4845

FERRITIC

- 3CR12, S41003/1.4003, 410S
- 409/1.4512, 430/1.4016, 439/1.4510
- 434/1.4113, 436/1.4526, 444/1.4521



VDM Metals

Contact us at Acerinox Australasia Pty Ltd

For more information about our products or how we can assist your project, contact **Cristina Palacios** +61 417 210 213 cristina.palacios@acerinox.com

Acerinox Group

www.acerinox.com
www.columbus.co.za
www.northamericainstainless.com
www.vdm-metals.com

STAINLESS STEEL PLATE* (CONTINUED)

THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	304/304L 2B	304/304L HRAP	316/316L 2B	316/316L HRAP	321 HRAP	LEAN DUPLEX HRAP	DUPLEX HRAP	3CR12/ 5CR12 HRAP	253MA HRAP
13.00	1500	6000		•		•					
	2000	6000		•		•	•			•	
	2500	7500		•		•					
	3000	7500		•		•					
15.00	2000	6000		•							
	2750	5000		•							
16.00	1219	2438	•	•							
	1500	6000	•	•		•					
	2000	4000	•	•							
		6000	•	•	•	•	•	•	•	•	•
	2500	7500	•	•		•					
	3000	7500	•	•		•					
17.00	2000	6000	•	•							
19.00	2000	6000	•	•		•	•			•	•
20.00	1219	2438	•	•							
	1500	3000	•	•							
		6000	•	•		•				•	
	2000	4000	•	•							
		6000	•	•		•	•	•	•	•	
	2500	8000	•	•		•					
25.00	1219	2438	•	•							
	1500	3000	•	•							
		6000	•	•		•					
	2000	6000	•	•		•	•		•	•	•
	2500	7500	•	•		•					
	3000	7500		•		•					
32.00	1500	6000		•		•					
	2000	6000		•		•	•		•		
	2500	8000		•		•					
	3000	6000		•		•					
40.00	2000	6000		•		•	•		•		
50.00	2000	6000		•		•			•		
65.00	2475	6000			•	•					
	3000	4000		•		•					
80.00	2300	6000			•	•					
	3000	3000		•		•					
100.00	2000	3000				•					

* No. 1 finish (HRAP) is standard. 2B finish may be available in thicknesses up to about 8.00 mm.
 NB Sizes also cover the closest imperial measurement. For more information see page 5.

d'Al

Dalsteel Metals Pty Limited

Australia's leading stockist/distributor of stainless steel & aluminium products

Stainless Steel

SHEET • TUBE • COIL • BAR • PLATE • PIPE • BALUSTRADE FITTINGS

Aluminium

SHEET • COIL • PLATE • TREADPLATE • PROPELLER PLATE • EXTRUSIONS



Delivering Service for over 50 years

BRISBANE

11 / 62 Crockford Street
Northgate, Qld 4013
Ph: 07 3216 2575
E: salesqld@dalsteel.com.au

MELBOURNE

1 Marconi Drive
Dandenong South, VIC 3175
Ph: 03 8787 5600
E: salesmb@dalsteel.com.au

SYDNEY

41 Lyn Parade
Prestons, NSW 2170
Ph: 02 9758 1444
E: sales@dalsteel.com.au

www.dalsteel.com.au

STAINLESS STEEL PERFORATED SHEET: GRADE 304 AND 316

GRADE	SHEET THICKNESS (mm)	HOLE DIAMETER (mm)	PITCH* (mm)	SHEET LENGTH (mm)	SHEET WIDTH (mm)
304	0.4	0.5	1.1	2000	1000
	0.5	0.8	1.5	2000	1000
	0.5	1.0	2.0	2000	1000
	0.7	1.6	2.5	2400	1200
	0.9	2.0	3.0	2400	1200
	0.9	3.3	4.5	2400	1200
	0.9	4.8	5.6	2400	1200
	1.0	1.0	2.0	2000	1000
	1.0	1.5	2.6	2000	1000
	1.0	2.0	3.0	2000	1000
	1.0	2.0	3.5	2000	1000
	1.0	3.0	4.0	2000	1000
	1.0	3.0	5.0	2000	1000
	1.0	3.0	5.0	2500	1250
	1.0	4.0	5.0	2000	1000
	1.0	5.0	6.0	2000	1000
	1.0	5.0	7.0	2000	1000
	1.0	8.0	11.0	2000	1000
	1.0	10.0	12.7	2000	1000
	1.0	10.0	12.7	2500	1250
	1.2	4.8	5.6	2400	1200
	1.5	2.0	3.5	2000	1000
	1.5	3.0	5.0	2000	1000
	1.5	3.0	5.0	2500	1250
	1.5	3.3	5.6	2400	1200
	1.5	5.0	6.5	2000	1000
	1.5	5.0	8.0	2000	1000
	1.5	5.0	8.0	2500	1250
	1.5	6.0	9.0	2000	1000
	1.5	6.4	9.6	2400	1200
	1.5	8.0	12.0	2000	1000
	1.5	9.5	14.3	2400	1200
	1.5	10.0	15.0	2000	1000
	1.5	10.0	15.0	2500	1250
	1.5	12.0	16.0	2000	1000
	1.5	12.7	17.3	2400	1200
	1.5	15.0	21.0	2000	1000
	1.6	4.8	5.6	2400	1200
	2.0	3.0	5.0	2000	1000
	2.0	10.0	15.0	2000	1000
316	0.8	1.1	2.0	2000	1000
	1.0	2.0	3.5	2000	1000
	1.0	3.0	4.0	2000	1000
	1.0	3.0	5.0	2000	1000
	1.0	5.0	7.0	2000	1000
	1.5	3.0	5.0	2000	1000
	1.5	5.0	8.0	2000	1000
	1.5	8.0	11.0	2000	1000
	1.5	10.0	15.0	2000	1000

*Pitch refers to the distance between hole centres



Over 28 years experience in designing, fabricating and constructing bolted steel panel tanks and reservoirs in Australia, New Zealand and the Pacific. Our comprehensive range of tank products, offers our clients multiple value engineered tanking solutions tailored to our clients requirements.


We specialize in construction of Stainless Steel bolted tanks and reservoirs.

- TS700 Circular Non Liner Tanks up to 20ML in Stainless Steel, Duplex Stainless Steel, factory coated Glass Fused to Steel and Fusion Bonded Epoxy.
- TS190 Rectangular Non Liner Tanks – Stainless Steel 304SS and 316SS
- TS600 Circular Liner Tanks up to 10ML in Galvanized Steel and Stainless Steel
- TS250 Rectangular Non Liner Tanks – Galvanized Steel
- AG Tanks Galvanized Steel Dairy Effluent, Agricultural and Horticulture Tanks
No concrete foundations required for AG Tanks
- SMR Service Maintenance and Repair services



Contact Tasman Tanks: 1800 826 526
E: sales@tasmantanks.com.au Web: www.tasmantanks.com.au

SAFETY FLOORING PRODUCTS

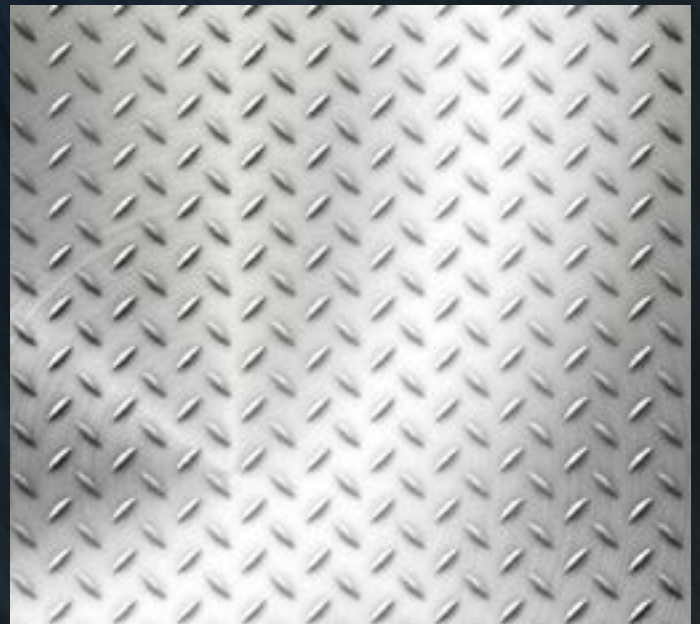

SAFETY FLOORING PRODUCTS

Product Description

Highly effective non-slip plates and sheets, intended for use in industrial, agricultural and some commercial applications. Not intended for high volume public thoroughfares.

Sharp changes in direction give you grip and perforated sheet allows drainage. Drainage is desirable to prevent pooling.

Floor (Checker) Plate in hot rolled or cold pressed with a universal grip design and ridge strength.

Standards

ASTM A480/A480M General Requirements for Flat Rolled Stainless and Heat Resisting Steel Plate, Sheet and Strip.


ISO 10630 Industrial Plate Screens – Specifications and Test Methods.

STAINLESS STEEL SAFETY FLOORING

THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	PRESSED		HOT ROLLED	
			304	316	304	316
2	1219	2438	•			
3	1219	2438	•			
3.18	1219	2438			•	
3.18	1219	3048			•	
3.5	1219	2438	•			
3.5	1500	3000	•			
4.5	1219	2438	•		•	
4.5	1500	3000	•			
4.5	1524	3048			•	
4.76	1219	2438			•	
4.76	1219	3048			•	
6	1219	2438			•	•
6	1250	2500			•	
6	1250	6000			•	
6	1500	3000			•	•
6	1524	3048			•	•
6.35	1219	2438			•	

Note: Tear configuration and dimensions differ by thickness and mill source. Check with your supplier.

BAR

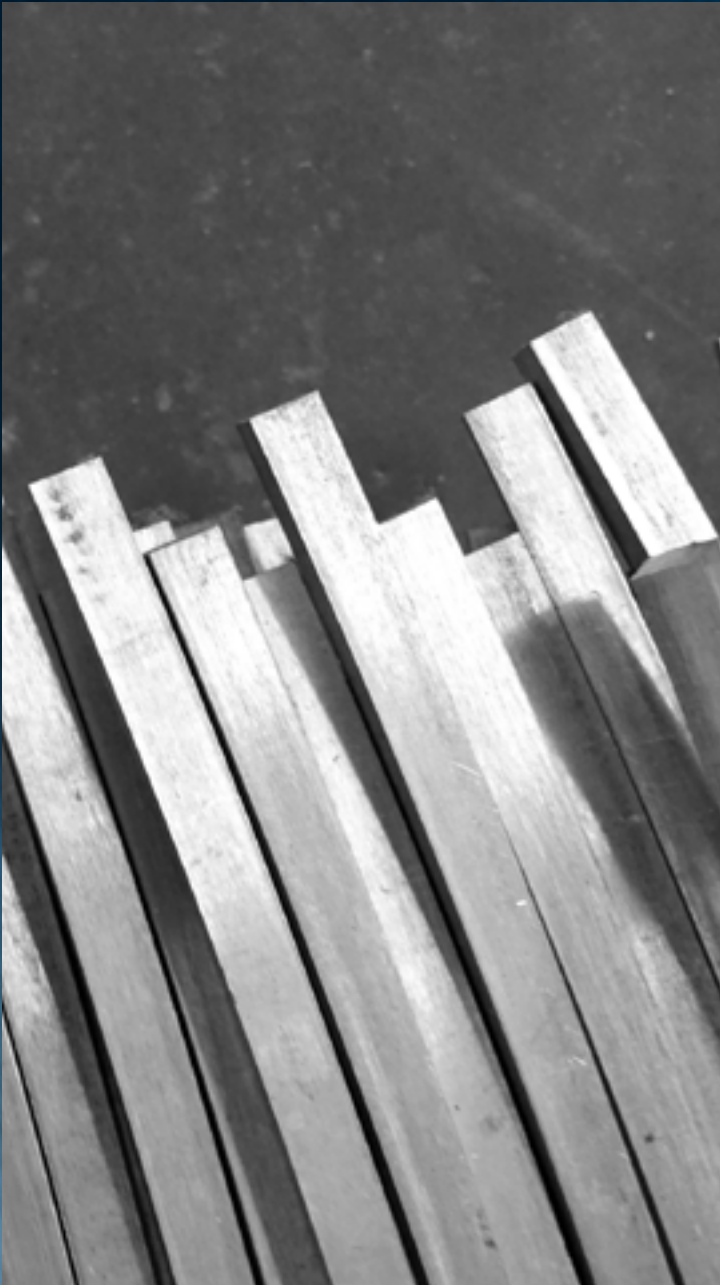

BAR

Product Description

Stainless steel bar comprises numerous long products referred to by the shape, the section dimension, grade, condition and surface finish. They can be categorised as follows; round (solid and hollow), flat, shaped (hexagonal, square) and structural (channel, angle, reinforcing).

Smaller sizes of round bar (25.4 mm and lower) are generally drawn. Sizes above 25.4 mm and less than 101.6 mm are generally annealed, turned and polished. Sizes above 101.6 mm are generally rough turned to k12 tolerance. Centre-less ground finishing is used for applications requiring superior tolerance and straightness.

Flat bar is stocked in both hot rolled or slit rolled edge finish, with the hot rolled finish arguably producing a superior finish for decorative applications. Structural sections are also typically supplied in hot rolled finish. Should superior finishes be needed, this can be achieved using mechanical or electrochemical polishing processes, available through local service providers.

Reinforcing bar (also commonly referred to as "rebar") is used to strengthen concrete and masonry structures, specifically under tensile loads. Traditionally rebar is used in carbon steel form, however stainless steel reinforcing is growing rapidly particularly in marine environments. Typically supplied in bar form and requiring welding to form mesh panels, it is stocked in 304, 316 and higher strength duplex variants.

Relevant Standards

ASTM A193/A193M	Alloy-Steel and Stainless Steel Bolting Materials for High Temperature Service or High Pressure Service and Other Special Purpose Applications.
ASTM A194/A194M	Carbon Steel, Alloy Steel, and Stainless Steel Nuts for Bolts for High Pressure and High Temperature Service, or Both.
ASTM A276	Stainless Steel Bars and Shapes.
ASTM A314	Stainless Steel Billets and Bars for Forgings.
ASTM A320/A320M	Alloy-Steel and Stainless Steel Bolting for Low-Temperature Service.
ASTM A453/A453M	High-Temperature Bolting, with Expansion Coefficients Comparable to Austenitic Stainless Steels.
ASTM A484/A484M	General Requirements for Stainless Steel Bars, Billets and Forgings.
ASTM A479/A479M	Stainless Steel Bars and Shapes for Use in Boilers and Other Pressure Vessels.
ASTM A511/A511M	Seamless Stainless Steel Mechanical Tubing and Hollow Bar.
ASTM A564/A564M	Hot-Rolled and Cold-Finished Age-Hardening Stainless Steel Bars and Shapes.
ASTM A582/A582M	Free Machining Stainless Steel Bars.
ASTM A955/A955M	Deformed and Plain Stainless Steel Bars for Concrete Reinforcement.
BS 6744:2016	Stainless Steel Bars - Reinforcement of Concrete - Requirements and Test Methods.
EN 10088-3	Stainless Steels – Part 3: Technical Delivery Conditions for Semi-Finished Products, Bars, Rods, Wire, Sections and Bright Products of Corrosion Resisting Steels for General Purposes.

STAINLESS STEEL ROUND BAR

DIAMETER (mm)	DIAMETER (inches)	303	304/304L	316/ 316L	431	DUPLEX	SUPER DUPLEX	253 MA
3.18	0.125	•	•	•				
3.97	0.156		•	•				
4.76	0.187	•	•	•				
5.00	0.197	•	•	•				
6.00	0.236	•	•	•				
6.35	0.250	•	•	•				
7.95	0.313	•	•	•				
8.00	0.315	•	•	•				•
9.52	0.375	•	•	•	•			
10.00	0.394	•	•	•		•		•
11.11	0.437	•	•	•				
12.00	0.472	•	•	•		•		•
12.70	0.500	•	•	•	•			
14.00	0.551			•				
14.29	0.563	•	•	•				
15.88	0.625	•	•	•	•			
16.00	0.630	•	•	•		•		•
18.00	0.709			•				
19.05	0.750	•	•	•	•	•		
20.00	0.787	•	•	•		•	•	•
22.00	0.866	•		•				
22.23	0.875	•	•	•	•	•		
24.00	0.945		•	•		•		
25.00	0.984	•	•	•		•	•	•
25.40	1.000	•	•	•	•	•		
28.58	1.125	•	•	•	•	•		
30.00	1.181		•	•		•	•	
31.75	1.250	•	•	•	•	•		
34.93	1.375	•	•	•	•	•		
35.00	1.378		•	•			•	•

Improved machinability (IM) quality is available in most grades of stainless steel.

This table continues on page 30.

Vulcan.

Your trusted choice for reliable stainless solutions

Vulcan is one of the largest stockists and distributors of quality stainless steels and special alloys in Australia. We have strategically located distribution and service centres across the country to best support the needs of our customers in terms of availability and speed of delivery.

Most of our service centres have the latest CNC laser cutting machines, as well as plasma cutting and coil processing facilities. We stand behind our products with full technical support before and after purchase.



Discover our range of stainless steel products [here](#)



Bar Products



Kanthal Heating Systems



Tube Products



Oil & Gas



Wire & Strip



Flat Products



Flanges & Fittings



Laser & Plasma Solutions



Creusabro Wear Plate



Pipe Products



Welding Products



Coil Processing Solutions

Get in touch with our team today

Vulcan Adelaide
P (08) 8243 7700

Vulcan Brisbane
P (07) 3347 0560

Vulcan Mackay
P (07) 4952 5000

Vulcan Sydney
P (02) 9828 0600

Vulcan Albury
P (02) 6041 4999

Vulcan Bunbury
P (08) 9796 4200

Vulcan Melbourne
P (03) 8791 9697

Vulcan Townsville
P (07) 4722 4100

Vulcan Bathurst
P (02) 6339 8900

Vulcan Cairns
P (07) 4252 3200

Vulcan Newcastle
P (02) 9828 0600

Vulcan Brendale
P (07) 3335 6700

Vulcan Campbellfield
P (03) 9567 7299

Vulcan Perth
P (08) 9412 5600

VULCAN.CO

VULCAN.

STAINLESS STEEL ROUND BAR (CONTINUED)

DIAMETER (mm)	DIAMETER (inches)	303	304/ 304L	316/ 316L	431	DUPLEX 2205	SUPER DUPLEX	253 MA
36.00	1.417		•	•		•		
38.10	1.500	•	•	•	•	•		
40.00	1.575	•	•	•	•	•	•	•
41.27	1.625		•	•				
44.45	1.750	•	•	•	•	•		
47.63	1.875			•				
50.00	1.969	•	•	•	•	•	•	•
50.80	2.000	•	•	•	•	•		
53.97	2.125	•	•	•				
57.15	2.250		•	•	•	•		
60.00	2.362			•	•	•	•	
63.50	2.500		•	•	•	•		
65.00	2.559			•		•		
69.85	2.750		•	•	•	•		
70.00	2.756					•	•	•
76.20	3.000	•	•	•	•	•		
80.00	3.150					•	•	•
82.55	3.250		•	•	•	•		
88.90	3.500		•	•	•	•		
90.00	3.543						•	
95.25	3.750			•		•		
100.00	3.937					•	•	
101.60	4.000		•	•	•	•		
110.00	4.330		•	•		•	•	•
114.30	4.500		•	•				
120.00	4.724			•		•	•	
125.00	4.921						•	
127.00	5.000		•	•				
130.00	5.118		•	•		•		
140.00	5.512			•		•		

This table continues on next page.

Improved machinability (IM) quality is available in most grades of stainless steel.

STAINLESS STEEL ROUND BAR (CONTINUED)

DIAMETER (mm)	DIAMETER (inches)	303	304/ 304L	316/ 316L	431	DUPLEX 2205	SUPER DUPLEX	253 MA
150.00	5.905						•	
152.40	6.000		•	•		•		•
160.00	6.299					•		
165.00	6.496			•				
170.00	6.693			•				
180.00	7.087		•	•		•	•	
190.00	7.480			•		•		
200.00	7.874			•		•	•	
203.20	8.000			•		•		
205.00	8.071			•				
210.00	8.267					•		
220.00	8.661						•	
228.60	9.000			•				
230.00	9.055					•		
250.00	9.842						•	
254.00	10.000			•		•		
280.00	11.020			•				
300.00	11.811					•		
304.80	12.000			•				
310.00	12.204					•		
325.00	12.795			•		•		
330.00	12.992			•		•		
340.00	13.385			•				
350.00	13.779					•		
355.60	14.000			•		•		
375.00	14.764			•				
400.00	15.748			•		•		
450.00	17.716			•		•		
500.00	19.685			•				

Improved machinability (IM) quality is available in most grades of stainless steel.



VIRAJ PROFILES PRIVATE LIMITED

Building A Sustainable Stainless World

STRENGTH RELIABILITY PRECISION

World's leading manufacturer of
Stainless Steel Long Products

WIRE | WIRE RODS | FASTENERS | BRIGHT BARS | PROFILES | FLANGES

Corporate Office:

Viraj Tower, Ground & 1st Floor, Junction of
Andheri Kurla Road, Western Express Highway,
Near Land Mark Building, Andheri (East),
Mumbai - 400069, India | T : +91-22 6276 6200






Factory Office:

G-34, MIDC Tarapur Industrial Area,
Boisar, Dist. - Palghar,
Maharashtra - 401506, India
T : +91-2525 660 600

Registered Office:

223, Exult Developers, Nr Vesu SS,
Vesu, Surat - 395007,
Gujarat, India

For Product Related Enquiries: sales@viraj.com

www.viraj.com | Follow us:     

STAINLESS STEEL HOLLOW BAR: GRADE 316

OUTSIDE DIAMETER (mm)	INSIDE DIAMETER (mm)	AVERAGE WEIGHT (kg/m)	CHUCKED TRUE TO THE OD MAX OD (mm)	CHUCKED TRUE TO THE OD MAX ID (mm)	CHUCKED TRUE TO THE ID MAX OD (mm)	CHUCKED TRUE TO THE ID MAX ID (mm)
32	20	4.20	31.0	21.9	30.1	21.0
	16	5.07	31.0	18.0	30.0	17.0
36	25	4.55	35.0	26.9	34.1	26.0
	20	5.91	35.0	22.0	34.0	21.0
	16	6.78	35.0	18.1	33.9	17.0
40	28	5.49	39.0	29.9	38.1	29.0
	25	6.47	39.0	27.0	38.0	26.0
	20	7.83	39.0	22.1	37.9	21.0
45	32	6.7	44.0	33.9	43.1	33.0
	28	8.17	44.0	30.0	43.0	29.0
	20	10.5	44.0	22.2	42.8	21.0
50	36	8.01	49.0	38.0	48.0	37.0
	32	9.7	49.0	34.1	47.9	33.0
	25	12.1	49.0	27.2	47.8	26.0
56	40	10.2	55.0	42.0	54.0	41.0
	36	12.1	55.0	38.1	53.9	37.0
	28	15.2	55.0	30.3	53.7	29.0
63	50	9.9	62.0	51.9	61.1	51.0
	40	15.4	62.0	42.2	60.8	41.0
	32	19.0	62.0	34.4	60.6	33.0
71	56	12.9	69.9	58.0	68.9	57.0
	45	19.6	69.9	47.3	68.6	46.0
	36	24.1	69.9	38.5	68.4	37.0
80	63	16.4	78.8	65.0	77.8	64.0
	50	25.3	78.6	52.4	77.4	51.0
	45	28.3	78.8	47.5	77.3	46.0
	40	30.9	78.8	42.6	77.2	41.0
85	45	33.5	83.7	47.6	82.1	46.0
90	71	20.6	88.6	73.1	87.6	72.1
	63	27.1	88.6	65.3	87.3	64.0
	50	36.1	88.6	52.6	87.0	51.0
95	50	42.1	93.5	52.7	91.8	51.0
100	80	24.4	98.5	82.3	97.4	81.2
	71	32.7	98.5	73.4	97.2	72.1
	56	42.3	98.5	58.7	96.8	57.0

This table continues on next page.

STAINLESS STEEL HOLLOW BAR: GRADE 316 (CONTINUED)

OUTSIDE DIAMETER (mm)	INSIDE DIAMETER (mm)	AVERAGE WEIGHT (kg/m)	CHUCKED TRUE TO THE OD MAX OD (mm)	CHUCKED TRUE TO THE OD MAX ID (mm)	CHUCKED TRUE TO THE ID MAX OD (mm)	CHUCKED TRUE TO THE ID MAX ID (mm)
106	80	32.3	104.4	82.5	103.1	81.2
	71	40.6	104.4	73.5	103.0	72.1
	56	52.1	104.4	58.9	102.5	57.0
112	90	30.2	110.3	92.5	109.2	91.4
	80	40.6	110.3	82.6	108.9	81.2
	63	55.3	110.3	65.8	108.5	64.0
118	90	39.0	116.2	92.7	114.9	91.4
	80	49.4	116.2	82.8	114.6	81.2
	63	64.2	116.2	66.0	114.2	64.0
125	100	38.3	123.1	102.7	121.9	101.5
	90	49.8	123.1	92.8	121.7	91.4
	71	68.5	123.1	74.0	121.2	72.1
132	106	42.0	130.0	108.8	128.8	107.6
	90	61.1	130.0	93.0	128.4	91.4
	71	79.7	130.0	74.2	127.9	72.1
140	112	47.8	137.9	115.0	136.6	113.7
	100	63.3	137.9	103.1	136.3	101.5
	80	85.2	137.9	83.3	135.8	81.2
150	125	47.7	147.7	128.1	146.5	126.9
	106	74.2	147.7	109.3	146.0	107.6
	80	101.0	147.7	83.6	145.3	81.2
160	132	56.2	157.6	135.3	156.3	134.0
	112	85.8	157.6	115.5	155.8	113.7
170	140	63.8	167.4	143.5	166.0	142.1
	118	98.4	167.4	121.7	165.5	119.8
180	150	68.4	177.3	153.6	176.0	152.3
	125	110.0	177.3	128.9	175.3	126.9
190	160	73.0	187.1	163.8	185.7	162.4
	132	123.0	187.0	136.0	185.1	134.0
200	160	97.6	197.0	164.0	195.4	162.4
	140	134.0	197.0	144.2	194.9	142.1
212	170	109.0	208.8	174.2	207.2	172.6
	130	182.0	208.6	134.6	206.2	132.0
224	180	121.0	220.6	184.4	218.9	182.7
	140	199.0	220.6	144.8	217.9	142.1
236	190	133.0	232.4	194.6	230.7	192.9
	150	216.0	232.4	155.0	229.7	152.3
250	200	153.0	246.2	204.9	244.3	203.0

STAINLESS STEEL HEXAGONAL BAR

ACROSS FLATS (mm)	ACROSS FLATS (inches)	WEIGHT (kg/m)	304	316
9.53	0.375	0.62		•
13.34	0.525	1.21	•	•
15.27	0.601	1.59	•	•
18.03	0.710	2.21	•	•
19.05	0.750	2.47	•	•
20.83	0.820	2.95	•	•
22.23	0.875	3.36		•
23.37	0.920	3.72	•	
24.00	0.945	3.92	•	
25.65	1.010	4.48	•	•
28.58	1.125	5.56		•
30.48	1.200	6.32	•	•
31.75	1.250	6.86		•
33.05	1.300	7.42		•
34.92	1.374	8.30		•
37.59	1.479	9.59		•
42.42	1.670	12.22		•
47.63	1.875	15.40		•
50.80	2.000	17.52		•
57.15	2.250	22.17		•

STAINLESS STEEL SQUARE BAR

ACROSS FLATS (mm)	ACROSS FLATS (inches)	304	316
5.00	0.197	•	
6.00	0.236		•
6.35	0.250		•
8.00	0.315		•
9.52	0.375		•
10.00	0.394	•	•
12.00	0.472	•	•
12.70	0.500		•
16.00	0.630	•	•
19.05	0.750		•
20.00	0.787	•	•
25.00	0.984	•	•
25.40	1.000		•
31.75	1.250	•	•
32.00	1.260	•	•
35.00	1.378		•
38.00	1.496	•	•
40.00	1.575	•	•
50.00	1.969		

STAINLESS STEEL FLAT BAR

THICKNESS (mm)	WIDTH (mm)	304	316
3.00	12.00	•	•
	20.00	•	•
	25.00	•	•
	30.00	•	•
	40.00	•	•
	50.00	•	•
	75.00	•	•
5.00	20.00	•	•
	25.00	•	•
	30.00	•	•
	40.00	•	•
	50.00	•	•
	65.00	•	•
	75.00	•	•
6.00	12.00	•	•
	20.00	•	•
	25.00	•	•
	30.00	•	•
	40.00	•	•
	50.00	•	•
	65.00	•	•
8.00	25.00	•	•
	30.00	•	•
	40.00	•	•
	50.00	•	•
	65.00	•	•
	75.00	•	•
	100.00	•	•

THICKNESS (mm)	WIDTH (mm)	304	316	
10.00	20.00	•	•	
	25.00	•	•	
	30.00	•	•	
	40.00	•	•	
	50.00	•	•	
	65.00	•	•	
	75.00	•	•	
	100.00	•	•	
	125.00	•	•	
	150.00	•	•	
12.00	20.00	•	•	
	25.00	•	•	
	30.00	•	•	
	40.00	•	•	
	50.00	•	•	
	65.00	•	•	
	75.00	•	•	
	100.00	•	•	
	125.00	•	•	
	150.00	•	•	
16.00	40.00	•	•	
	50.00	•	•	
	75.00	•	•	
	100.00	•	•	
	150.00	•	•	
	200.00	•	•	
	250.00	•	•	
	12.00	25.00	•	•
	16.00	40.00	•	•
	20.00	40.00	•	•
25.00	50.00	•	•	
12.00	25.00	•	•	
16.00	40.00	•	•	
20.00	40.00	•	•	
25.00	50.00	•	•	
12.00	25.00	•	•	
16.00	40.00	•	•	
20.00	40.00	•	•	
25.00	50.00	•	•	

Flat bars are manufactured by either hot rolling (Hot Rolled Annealed Pickled = HRAP) or by cold slitting of coil (Slit Rolled Edge = SRE).

STAINLESS STEEL EQUAL ANGLE BAR

SIZE (mm)	APPROX WEIGHT (kg/m)	304	316
20 x 20 x 3	0.9	•	•
25 x 25 x 3	1.2	•	•
25 x 25 x 5	1.8	•	•
25 x 25 x 6	2.1	•	•
30 x 30 x 3	1.4	•	•
30 x 30 x 4	1.8	•	•
30 x 30 x 5	2.2	•	•
30 x 30 x 6	2.6	•	•
40 x 40 x 3	1.9	•	•
40 x 40 x 4	2.5	•	•
40 x 40 x 5	3.0	•	•
40 x 40 x 6	3.5	•	•
50 x 50 x 3	2.4	•	•
50 x 50 x 5	3.8	•	•
50 x 50 x 6	4.5	•	•
50 x 50 x 10	7.1	•	•
60 x 60 x 6	5.5	•	•
65 x 65 x 6	6.0	•	•
65 x 65 x 8	7.7	•	•
65 x 65 x 10	9.5	•	•
75 x 75 x 6	6.9	•	•
75 x 75 x 8	8.9	•	•
75 x 75 x 10	11.1	•	•
75 x 75 x 12	13.1		•
100 x 100 x 6	9.3	•	•
100 x 100 x 8	12.2	•	•
100 x 100 x 10	15.0	•	•
100 x 100 x 12	17.8		•

STAINLESS STEEL UNEQUAL ANGLE BAR: GRADE 316

SIZE (mm)	APPROX WEIGHT (kg/m)
75 x 50 x 6	5.71
100 x 75 x 6	8.10

Unequal angle bar can be made in a wide variety of sizes. Contact your supplier for details.

STAINLESS STEEL CHANNELS: GRADE 316

DIMENSIONS (mm) THICKNESS x FLANGE x WEB [(B) x (H) x (T)]
40 x 20 x 3
50 x 25 x 3
80 x 40 x 5
100 x 50 x 6
130 x 65 x 6
150 x 75 x 6
200 x 100 x 10

STAINLESS STEEL REINFORCING BAR (REBAR)

NOMINAL DIAMETER (mm)	TYPE AND GRADE
6	Stainless steel rebar is available as ribbed (cold ribbed and hot ribbed) and plain round bar, and is stocked across grades 304, 316, 2304 and 2205. Contact your supplier for further information.
8	
10	
12	
16	
20	
25	
28	
32	
40	


STAINLESS BAR & WIRE Co.
 A FUTURE WITH SOLUTIONS

Sourcing the highest quality products from proven manufacturers and renowned global stockists, we provide project support and value-added solutions for our customers.

ANGLE FLAT SHEET WELDING WIRE ROUND & SQUARE BAR & DOWELS WIRE

stainlessbarandwireco.com.au
 PH: +61 7 5495 2205 > Evans Rd, Caboolture QLD 4510





WIRE AND WIRE ROPE



WIRE AND WIRE ROPE

Product Description

Stainless steel wire types are available in an almost infinite range of grades, strengths, finishes and conditions for use in diverse applications.

Relevant Standards

ASTM A313/A313M	Stainless Steel Spring Wire
ASTM A493	Stainless Steel Wire and Wire Rods for Cold Heading and Cold Forging
ASTM A555/A555M	General Requirements for Stainless Steel Wire and Wire Rods
ASTM A580/A580M	Stainless Steel Wire (Round and Other Shapes)
ASTM A581/A581M	Free-Machining Stainless Steel Wire and Wire Rods (Round and Other Shapes)
JIS G4309	Stainless Steel Wires
JIS G4314	Stainless Steel Wires for Springs
AWS A5.4	Stainless Steel Electrodes for Shielded Metal Arc Welding
AWS A5.9/A5.9M	Bare Stainless Steel Welding Electrodes and Rods



TENSILE ARCHITECTURE

PFEIFER

Cable Solutions For Architecture

- Stainless steel cables, 0.09mm - 36.0mm.
- Galvan coated cables, 6mm - 140mm.
- Open spiral strand, full locked cables, tension rods.
- Specialists in bespoke cable connections, clamps and hardware.
- Full service, including structural design & install assistance.

For more information: arch@ronstan.com.au | www.ronstantensilearch.com

STAINLESS STEEL GENERAL ENGINEERING WIRE

CONDITION AND FINISH	DESCRIPTION	SIZE RANGE (mm)
ANNEALED AND PICKLED (ANN)	Grey matt finish, annealed and pickled after drawing to size.	3.00 - 16.00
BRIGHT ANNEALED (BA)	Semi-bright finish obtained by strand annealing in a protective environment.	1.00 - 7.00
BRIGHT DRAWN (BD)	Bright finish - wire given a cold draw in oil and cleaned to improve surface lustre.	1.00 - 16.00
COLD DRAWN (CD)	Semi-matt finish - lightly drawn in soap. Can be supplied clean.	1.00 - 16.00
TEMPER DRAWN	Cold drawn in oil (bd) or soap (cd) to produce specific tensile strength.	1.00 - 12.00
SPRING TEMPER (ST)	Cold drawn to spring hard temper. Supplied with lubricant coating to aid spring coiling. Can be supplied cleaned.	1.00 - 16.00
SUPER-COAT (SC)	Semi-bright finish, coated with non-metallic lubricant and lightly drawn in soap or annealed and coated at final size for cold heading.	1.00 - 16.00

Grades: 302HQ, 303, 304, 304L, 316 AND 316L. Other grades on request.

Diameter range: Drawn wire (CD,BD) 1.00 to 16.00 mm
 Bright annealed (BA) 1.00 to 6.00 mm
 Annealed and pickled (ANN) 3.00 to 16.00 mm
 Other sizes on request.

Coatings: Super coat / Spring coat: Water soluble coatings applied by dipping and baking to act as a lubricant carrier in subsequent forming. Wire can be drawn in soap to provide an additional stearate lubricant coating.

Lime: A thin uniform coating of lime applied by dipping and baking.

Soap-coated: CD wire is usually supplied with drawing soap left on to facilitate subsequent forming.

Oiled: BD wire can be supplied with the drawing oil left on to assist subsequent fabrication.



The industry leader in stainless steel wire rope and fittings



Catenary Installation
Adelaide, Australia



Glass Facade, RACV Royal Pines Resort
Gold Coast, Australia



Shade Sail Structure
Ramat Gan National Park, Israel

Exclusively available from Arcus Wire Group, the hamma® range of stainless steel wire rope and fittings is manufactured by global leaders KOS (Korea's Original Stainless) and Kinzi.

The hamma® range is perfect for:

- **Marine** – ocean going vessels including yacht rigging for leisure and racing yachts
- **Industrial** – lightweight tensile membrane structures including shade sails as well as balustrades, irrigation systems and height safety applications
- **Architectural** – tensile cable systems for glass facades, cable nets, catenary artworks and lighting, as well as high-strength corrosion resistant applications such as bridges and underwater cables



Lisa Blair's Yacht Climate Action Now
At the launch of Lisa's epic adventure to be the first woman to sail solo, non-stop and unassisted around Antarctica.

FOR MORE INFORMATION
1800 ARCUSW

sales@arcuswire.com | arcuswire.com



sales@arcuswire.com | arcuswire.com

WIRE ROPE

	CONSTRUCTION A x B ^	INDIVIDUAL WIRE DIAMETER (mm)	GRADE AND SURFACE					
			304		316			2205
			BARE	PVC COATED	BARE	PVC COATED	COMPACTED STRAND	BARE
RIGID	1 x 7	1.6					•	
		2.0					•	
		2.5					•	
		3.0					•	
		3.2					•	
		3.5					•	
		4.0					•	
	1 x 19	1.0			•			
		1.2			•			
		1.5			•			
		1.6			•			
		2.0			•			
		2.4		•	•			
		2.5			•			•
		3.0			•			•
		3.2		•	•			•
		3.5			•			
		4.0		•	•	•		
		4.8			•			
		5.0			•		•	
		5.5			•			
		6.0			•		•	
		6.4			•			
		7.0			•		•	
		7.2			•			
		8.0			•		•	
		9.0			•		•	
		9.5			•			
		10.0			•		•	
		11.0	•		•		•	
		12.0			•		•	
		12.7			•			
	14.0			•				
	16.0			•				
	19.0			•				
	20.0			•				
	22.0			•				
	1 x 25	14.0					•	
		16.0					•	
		19.0					•	

This table continues on next page.

WIRE ROPE (CONTINUED)


	CONSTRUCTION A x B ^	INDIVIDUAL WIRE DIAMETER (mm)	GRADE AND SURFACE						
			304		316			2205	
			BARE	PVC COATED	BARE	PVC COATED	COMPACTED STRAND	BARE	
RIGID	1 x 37	14.0			•				
		16.0			•				
		19.0			•				
		24.0			•				
		26.0			•				
		28.0			•				
	1 x 61	30.0			•				
		34.0			•				
		36.0			•				
		42.0			•				
	FLEXIBLE	7 x 7	1.2		•	•			
			1.6			•	•		
			2.0		•	•			
			2.4		•	•	•		
3.0					•				
3.2				•	•				
4.0				•	•	•			
4.8				•	•	•			
5.0					•				
6.0					•	•		•	
6.4				•	•	•			
7.0					•				
8.0					•				
7 x 19			1.6			•	•		
		2.0			•				
		2.4	•		•				
		2.5			•				
		3.0			•				
		3.2	•		•	•			
		3.5			•				
		4.0	•		•	•		•	
		4.8	•		•				
		5.0			•				
		5.5			•	•			
		6.0			•			•	
		6.4			•	•			
		7.0			•				
		7.2			•				
		8.0			•	•		•	
		9.0			•				
		9.5			•				
		10.0			•				
		12.0			•			•	
12.7				•					
14.0			•			•			

This table continues on next page.

WIRE ROPE (CONTINUED)


	CONSTRUCTION A x B ^	INDIVIDUAL WIRE DIAMETER (mm)	GRADE AND SURFACE					
			304		316		2205	
			BARE	PVC COATED	BARE	PVC COATED	COMPACTED STRAND	BARE
FLEXIBLE	7 x 9	16.0			•			
		19.0			•			
		20.00			•			

^ Construction configuration A x B
Where A = number of strands
And B = number of individual wires within a single strand




1 x 19

1 strand consisting of 19 individual wires



7 x 7

7 strands, each consisting of 7 individual wires



7 x 19

7 strands, each consisting of 19 individual wires

WIRE ROPE FITTINGS

Wire rope is available in multiple configurations (number of wire and strands) and is generally produced locally from stocked feed wire. The range of fittings typically available include turnbuckles, rigging screws, toggles and studs, and hundreds of others are available in metric and imperial sizes. Industries where these fittings are used typically include marine or yacht rigging, balustrading or metal fabrications, industrial or agricultural. Large ranges are stocked in Australia, and bespoke items and custom size can also be quickly machined from locally available bar stocks. Please contact your local supplier for further information.

STAINLESS STEEL HARDWARE & CHAIN
(One of Australia's largest stockists)

STAINLESS STEEL WIRE ROPE & FITTINGS
(From 1.5mm up to 26mm)

STAINLESS STEEL LIFTING CHAINS & ACCESSORIES
(Exclusive cromox agent)

EXCLUSIVE **cromox** DISTRIBUTOR



STAINLESS STEEL HARDWARE AND ROPE FITTINGS



Bridco has been one of Australia's leading importers of Stainless Steel Hardware, Chain and Wire Rope Fittings for over 30 years.

Bridco stock high quality fittings from some of the most reputable manufacturers all across the world.

Whether it's commercial products, architectural systems or rated lifting equipment, Bridco has the products and expertise to assist.

Distributors for:

Ketten Walder GMBH
Stainless Steel Lifting Chains & Accessories

Talurit AB
The original mechanical splicing system. Hydraulic swaging presses, ferrules & wire rope handling equipment.

Wiretechnik AB
Hydraulic roll swage machines



STAINLESS STEEL WIRE ROPE & FITTINGS




BRIDCO also has facilities to supply & manufacture wire rope assemblies from 1.6-26mm diameters.

BRIDGE & COMPANY PTY LTD
37 Taree Street Burleigh QLD 4220
Telephone: (07) 55 935 688
Fax: (07) 55 935 872
Email: bridge@bridco.com.au
www.bridco.com.au

Contact us for your nearest BRIDCO distributor

STAINLESS STEEL CHAIN

Stainless steel chain is produced in various sizes and styles. Produced with round solid wire or bar, the links are bent into an oval shape and welded closed. Most commonly there is a short link (internal length of 3 x diameter) and a medium link (internal length of 4 x diameter) chain. Stainless steel chain is commonly used in commercial, shade, marine, and wastewater/sewage industries.

There are ranges of stainless steel chain which are rated for lifting. These chains go through rigorous QA steps and come supplied with test certificates stating the Working Load Limit (WLL), Manufacturing Proof Force (MPF), and Minimum Breaking Load (MBL), as well as a traceability/batch number.

This chain along with other rated components can be assembled into lifting slings which are load tested and tagged prior to use in a lifting application. These chains generally exceed the requirements of *AS 4797-2009 Stainless steel for lifting purposes*. Note that the testing criteria for stainless steel chains for lifting gear are typically based on criteria from high alloy steel chains (*AS 3775 Chain slings for lifting purposes*) with revised loads to suit stainless steel.


STAINLESS STEEL CHAIN: SHORT LINK CHAIN

CHAIN SIZE DIAMETER (mm)	AISI 304	AISI 316	AISI 316L (RATED FOR LIFTING)	AISI 318LN (RATED FOR LIFTING)
4.0			•	
5.0			•	
6.0		•	•	
7.0			•	
8.0	•	•	•	•
10.0	•	•	•	•
12.0		•		
13.0			•	•
16.0				•
18.0				•
22.0				•
26.0				•

STAINLESS STEEL CHAIN: MEDIUM LINK CHAIN

CHAIN SIZE DIAMETER (mm)	AISI 304	AISI 316
2.0		•
3.0	•	•
4.0	•	•
5.0		•
6.0	•	•
8.0	•	•
10.0	•	•
12.0	•	•
16.0		•

MESH

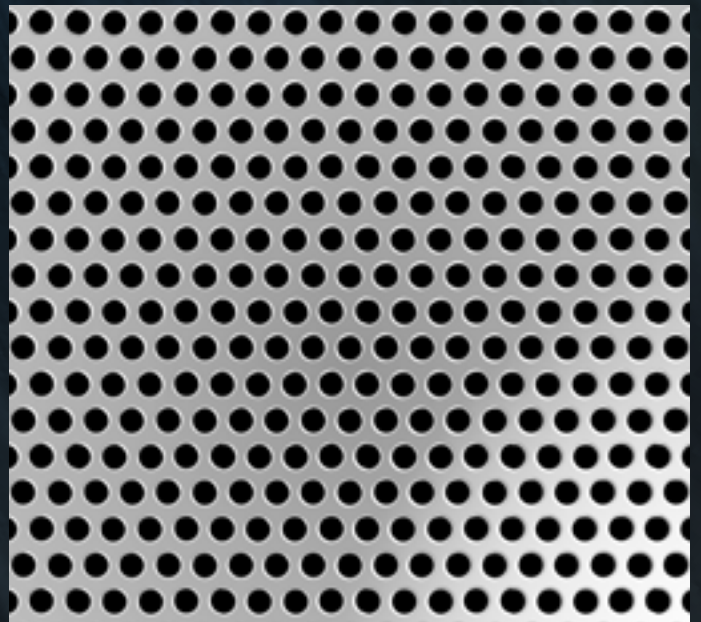

MESH

Product Description

Mesh generally comes in two forms, woven and welded.

Woven mesh is produced and stocked in a variety of weave forms, including plain, twilled, lock-crimped, inter-crimped and hollander type.

Applications include architectural, food contact, filtration, bushfire safety, as well as generally applications such as animal/insect control.

Mesh is generally supplied at specific widths, with more flexibility in length than rolls.

Welded mesh is available in both panel and roll form, again across specific widths with flexibility in lengths as rolls. Panels are typically 2400 mm in length.

Architectural wire mesh is a lightweight material with relatively strong tensile strength. Wire rope panels are made-to-order from local stock and attached to a frame by lacing an identical diameter wire between the panel and the framework.

Available in multiple variations, wire rope mesh is specified or identified by using several key points: Woven or ferruled type, aperture/diamond size, and wire rope size. It is primarily used as balustrade infill panels, fall protection screens or as greenwall panels. Wire rope mesh has a multitude of uses.

SWG refers to British Standard Wire Gauge.

Relevant Standards

ASTM A580/580M	Stainless Steel Wire
ASTM B117	Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM E2016	Industrial Woven Wire Cloth
AS 2331.3.1	Methods of Test for Metallic and Related Coatings – Corrosion and Related Property Tests – Neutral Salt Spray (NSS) Test
AS 5041	Methods of Test – Security Screen Doors and Window Grilles
ISO 21207	Corrosion Tests in Artificial Atmospheres – Accelerated Corrosion Tests Involving Alternate Exposure to Corrosion-Promoting Gases, Neutral Salt-Spray and Drying

WOVEN

PLAIN WEAVE

GRADE	304		316			
	WIDTH (mm)	APERTURE (mm)	SWG	APERTURE (mm)	SWG	
915		1.64	20	1.67	26	
		1.67	26			
1220		2.09	26	0.026	50	
				0.034	49	
				0.043	48.5	
				0.045	48	
				0.077	47	
				0.091	47	
				0.104	45.5	
				0.132	44	
	1245		0.547	30	0.154	42
			0.567	32	0.193	39
		0.758	30	0.223	39	
		0.820	26	0.25	37	
		0.920	28	0.318	36.5	
		1.03	24	0.415	34	
		1.14	26	0.547	30	
		1.24	28	0.820	26	
		1.25	24	0.920	28	
		1.41	22	1.03	24	
		1.56	24	1.58	16	
		1.64	20	1.64	20	
		1.67	26	1.67	26	
		1.975	18	1.98	24	
		1.98	24	2.63	16	
		2.09	26	3.03	18	
		2.28	20	4.75	16	
		3.03	18	6.87	16	
		3.33	20	10.2	12	
		3.48	16	10.7	14	
	5.15	18	11.1	16		
	6.47	14	12.88	10		
	6.87	16	16.5	12		
	10.70	14	22.25	10		
	11.1	16				
	22.25	10				
1550		0.547	30	0.077	47	
		0.608	26	0.104	45.5	
		0.71	24	0.132	44	
		0.758	30	0.154	42	
		0.820	26	0.193	39	
		1.03	24	0.223	38	
		1.14	26	0.25	37	
		1.24	28	0.318	36.5	
		1.25	24	0.415	34	
		1.41	22	1.03	24	
		1.56	24	1.31	19	
		1.64	20	1.64	20	
		1.67	26	1.67	26	
		1.92	20	1.98	24	
		1.975	18			
		1.98	24			
	2.28	20				
	2.47	22				

This table continues on next page.

PLAIN WEAVE (CONTINUED)

GRADE	304		316	
WIDTH (mm)	APERTURE (mm)	SWG	APERTURE (mm)	SWG
	2.62	24		
	3.33	20		
	3.48	16		
	3.88	18		
	4.18	20		
	4.75	16		
	5.15	18		
	6.47	14		
	6.87	16		
	10.7	14		
1830			1.67	26
			22.25	10



stainless steel

WIRE & MESH



PURCHASING SSWM PRODUCTS IS SEAMLESS, WE MAKE IT EASY WITH OUR



QUALITY ASSURED & TESTED

Against Australian & international standards



EXTENSIVE STOCK HOLDING

Australia's largest stockist



SPEED TO MARKET

Same day despatch for Australia wide delivery

380 Products



Stainless Steel
WOVEN MESH

30 Products



Stainless Steel
WELDED PANELS

50 Products



Stainless Steel
WELDED ROLLS

40 Products



Stainless Steel
PERFORATED SHEETS

TRUSTED PRODUCTS

Meeting Australian Standards



REINFORCING MESH



BUSHFIRE MESH



ARCHITECTURAL MESH



RURAL & COASTAL FENCING



ENVIRONMENTAL MESH



ROOF SAFETY MESH

STAINLESS STEEL GRADES AVAILABLE

304 • 310 • 316 • 316L • Duplex 2205



REQUEST A QUOTE

1300 304 316

Contact our technical sales team today



We are highly responsive and have developed a reliable and robust supply chain with fast delivery.



Our suppliers are ISO 9001 certified. We work with them to deliver quality products.



Our products are tested and meet ASTM standards.

AUSTRALIA'S LARGEST STOCKIST OF STAINLESS STEEL WIRE & MESH

WE ONLY STOCK STAINLESS STEEL AS IT LASTS

HEAD OFFICE - SHOWROOM & WAREHOUSE
3 Commercial Court, Tullamarine VIC 3043
QUEENSLAND WAREHOUSE - FOR PRE ARRANGED PICKUPS
Unit 2/195 Jackson Rd, Sunnybank Hills, QLD 4109

1300 304 316
sales@sswm.com.au
sswm.com.au



TWILLED WEAVE

GRADE	304		316	
WIDTH (mm)	APERTURE (mm)	SWG	APERTURE (mm)	SWG
1220			0.026	50
			0.034	49
			0.043	48.5
			0.045	48
			0.062	48

LOCKCRIMP WEAVE

GRADE	304		316	
WIDTH (mm)	APERTURE (mm)	SWG	APERTURE (mm)	SWG
1245	6.47	14	10.2	12
			12.88	10
1550	6.47	14		

INTERCRIMP WEAVE

GRADE	304		316	
WIDTH (mm)	APERTURE (mm)	SWG	APERTURE (mm)	SWG
1245	10.7	14	10.7	14
	11.1	16	11.1	16
	22.25	10	16.5	12
			22.25	10
1550	10.7	14		
1830			22.25	10

HOLLANDER WEAVE

GRADE	304		316	
WIDTH (mm)	NOMINAL FILTER RATING	ABSOLUTE FILTER RATING	NOMINAL FILTER RATING	ABSOLUTE FILTER RATING
1220	25	38	5	14
	40	63	10	18
	55	75	15	26
	65	105	25	38
	80	125	35	45
	100	120		
	150	240		
	200	290		
1270			80	125
1370			80	125
1550			80	125

WEAVE MESH FOR FOOD CONTACT APPLICATIONS

GRADE	304			
WIDTH (mm)	APERTURE (mm)	WIRE DIAMETER (mm)	OPEN AREA (%)	WEIGHT (kg per m)
1580	0.106	0.050	36	0.32
	0.125	0.056	48	0.40
	0.132	0.065	49	0.45
	0.14	0.067	46	0.48
	0.16	0.075	46	0.55
	0.18	0.09	45	0.61
	0.212	0.09	49	0.42
	0.224	0.100	49	0.62
	0.236	0.100	51	0.59
	0.245	0.065	62	0.43
	0.25	0.100	53	0.57
	0.265	0.100	52.8	0.52
	0.28	0.112	51	0.53
	0.30	0.112	53	0.62
	0.315	0.112	54	0.59
	0.335	0.14	49.7	0.50
	0.355	0.14	51	0.80
	0.375	0.14	53	0.74
	0.40	0.14	54	0.73
	0.425	0.14	56	0.73
	0.45	0.14	57	0.67
	0.475	0.16	56	0.65
	0.50	0.16	57	0.67
	0.53	0.16	59	0.78
	0.56	0.16	60	0.75
	0.6	0.16	62	0.81
	0.63	0.16	64	0.48
	0.67	0.16	65	0.48
	0.71	0.18	64	0.60
	0.75	0.18	65	0.72
	0.8	0.20	64	0.82
1580	0.8	0.25	58	0.90
	0.85	0.20	65	0.76
	0.85	0.224	63	0.68
	0.9	0.20	67	0.72
	0.9	0.315	55	0.81
	0.95	0.20	68.2	0.70
	0.95	0.315	56	0.79
	1.0	0.22	67	0.72
	1.0	0.315	58	0.81
	1.06	0.22	68.6	0.79
	1.12	0.22	69.4	0.73
	1.12	0.315	61	0.82
	1.18	0.22	71	0.70
	1.18	0.40	56	0.80
	1.25	0.22	72	0.65
	1.25	0.40	57	0.81
	1.4	0.22	74.5	0.61
	1.4	0.45	57	0.91
	1.6	0.22	77	0.52
	1.6	0.50	58	0.75
	1.8	0.32	72	1.45
	1.8	0.56	58	1.7
	2.0	0.32	74	1.32
	2.0	0.50	64	1.42

WELDED

PANELS

APERTURE (mm)	WIRE DIAMETER (mm)	GRADE 304	GRADE 316	GRADE 316L
25 x 25	2.50	•	•	
25 x 25	3.00	•	•	
25 x 50	3.00		•	
40 x 40	3.00	•	•	
40 x 40	4.00	•	•	
50 x 50	3.00	•	•	
50 x 50	4.00	•	•	
50 x 50	5.00	•	•	•
50 x 75	5.00	•	•	
75 x 13	4.00		•	
75 x 75	4.00		•	
100 x 100	3.00	•	•	
100 x 100	5.00	•	•	•
100 x 100	6.00	•	•	•
100 x 100	8.00	•	•	•
150 x 150	6.00		•	•
200 x 200	6.00		•	•

NOTE: All welded panels are 1200 mm x 2400 mm

ROLLS

APERTURE (mm)	WIRE DIAMETER (mm)	WIDTH (mm)	GRADE 304	GRADE 316
6.35 x 6.35	0.63	190.5		•
6.35 x 6.35	0.63	915	•	•
6.35 x 6.35	0.63	1220		•
6.35 x 6.35	0.80	1220	•	•
9.50 x 9.50	0.80	1220		•
9.50 x 9.50	1.00	1220	•	•
9.50 x 9.50	1.00	1520	•	•
11.0 x 11.0	0.80	1220	•	•
12.7 x 12.7	1.20	915	•	•
12.7 x 12.7	1.00	1220	•	•
12.7 x 12.7	1.20	915	•	•
12.7 x 12.7	1.20	1220	•	•
12.7 x 12.7	1.20	1525	•	•
12.7 x 12.7	1.60	915	•	
12.7 x 12.7	1.20	1830	•	
12.7 x 12.7	1.60	915	•	
12.7 x 12.7	1.60	1220	•	•
19.05 x 19.05	1.60	1220		•
19.05 x 19.05	2.00	1220		•
25.4 x 25.4	1.00	1220		•
25.4 x 25.4	1.20	915		•
25.4 x 25.4	1.20	1220		•
25.4 x 25.4	1.20	1525		•
25.4 x 25.4	1.60	1220		•
25.4 x 25.4	2.00	1220	•	•
50.8 x 50.8	2.00	1220		•

*NOTE: Stocked in 30 m rolls.

BOLTING CLOTH FOR SIFTING AND SCREENING APPLICATIONS

GRADE	316	
WIDTH (mm)	APERTURE (mm)	SWG
1220	0.075	43
	0.67	38
1530	0.075	43
	0.24	43
	0.32	41
	0.39	39
1580	0.105	47
	0.13	46
	0.15	45
	0.22	43
	0.25	43
	0.265	43
	0.28	42
	0.31	41
	0.44	39
	0.5	38
	0.54	38
	0.58	38
	0.85	34
	0.95	36
	1.4	34
2000	0.13	46



The go-to product of choice for stainless steel mesh solutions

Available exclusively from Arcus Wire Group – Australia's leading supplier of stainless steel wire rope and fittings

Our flexi-mesh range is the leading material used to create lightweight structures including balustrades, fall protection screens, greenwalls and facades.


Manufactured from high quality Korean made hamma® G316 stainless steel wire, flexi-mesh has a high tensile strength and relatively low weight.

It's unique tensile properties and ability to span long distances minimises the requirements for supporting cables and attachments, reducing overall project costs.

Main Image: Port Campbell Pedestrian Bridge
Client: Parks Victoria

FOR MORE INFORMATION
1800 ARCUSW

sales@arcuswire.com | projects@fleximesh.com

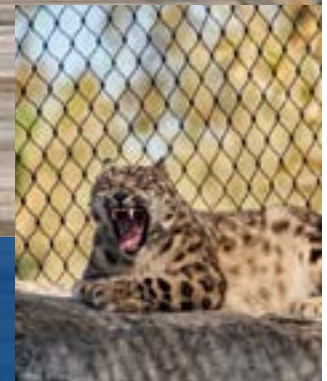

- Fully Engineered
- Structural Design Certification approved
- Meets Australian / New Zealand Standard AS/NZS 1170.1 :2002 – suitable for areas susceptible to crowding
- Meets the Building Code of Australia (BCA) National Construction Code (NCC) Volume 2 2019 – requirements for barriers and hand rails
- Various fixing details to suit project requirements
- Multiple sizing and aperture types to meet specific project parameters
- Versatility of uses of a single system include balustrading, fall-arrest, anti-climb, enclosure and screening capabilities



arcuswire.com | fleximesh.com


6010.102024

ARCHITECTURAL CABLE MESH: GRADE 316 & 2205 DUPLEX

APERTURE (MW) (mm)	WIRE DIAMETER (mm)				
	1.0	1.5	2.0	3.0	4.0
20	•				
25	•				
30	•				
35	•				
40	•				
50	•				
60	•				
70	•				
80	•				
100	•				
120	•				
140	•				
150	•				
160	•				
180	•				
200	•				
250	•				
300	•				

NOTE: The two variables of mesh selection are mesh width (MW) and wire diameter. Mesh height (MH) is a function of MW and can vary across suppliers. For further detail on MH's, enquire with your supplier.

Wire configurations are typically 7x7, but 7x19 is also supplied in thicker wire diameters.

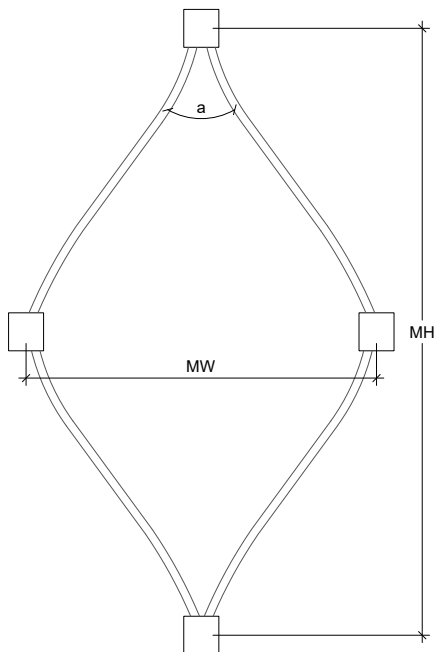

MW = Mesh Width
 MH = Mesh Height
 a = mesh opening angle, typically around 60°



TENSILE ARCHITECTURE



X-TEND[®]

The Original Tensile Mesh

- Developed and engineered in Germany.
- ETA Quality – The only tensile mesh to achieve a European Technical Assessment.
- EU Manufactured and exclusive to Ronstan in natural and coloured finishes.
- 25 years of unparalleled mesh design and installation experience from Ronstan.

For more information: arch@ronstan.com.au | www.ronstantensilearch.com

ARCHITECTURAL CABLE MESH: GRADE 316 COLOURED

OPTIONS

Ferrule colour: Stainless steel, black

Mesh colour: Black, white, blue, red, gold

APERTURE (MW) (mm)	WIRE DIAMETER (mm)				
	1.0	1.5	2.0	3.0	4.0
20	•	•	•		
25	•	•	•		
30	•	•	•		
35	•	•	•		
40	•	•	•	•	
50	•	•	•	•	
60	•	•	•	•	
70	•	•	•	•	
80	•	•	•	•	
100		•	•	•	
120		•	•	•	
140		•	•	•	
160		•	•	•	
180		•	•	•	
200		•	•	•	
250					
300			•	•	
400			•	•	

NOTES:

Wire strand colouring processes differ by manufacturer from temperature hardened polymer colour coatings to electrostatic painting.

Colour ranges offered encompass most RAL colours.

Finishes vary in flexibility, durability, colour fastness and fire rating.

Ferrules are usually blackened with a spectral (electrochemical) process.

Not suitable for aggressive coastal or chloridic environments.

Please also refer to the notes under the *Architectural Cable Mesh: Grade 316 & 2205 Duplex* table on page 62.

PIPE AND TUBE



PIPE AND TUBE

Product Description

Pipe is defined by nominal size and schedule. Welded pipe to ASTM A312/A312M (usually stocked) is manufactured from strip and longitudinally welded without the addition of filler metal. Seamless pipe is produced from hollow billets drawn to the desired length. Surface finish is generally considered to be "mill finish".

Tube is defined by an outside dimension (OD) and wall thickness. It is manufactured in round, square or rectangular sections. Tube is generally stocked in seam welded form, however round tube is also available in seamless form. "Mirror" polished tube is stocked however surface finish can vary across suppliers.

Hygienic applications requiring tube (and fittings) conforming to AS 1528 are readily stocked by multiple distributors.

Relevant Standards

ASTM A213/A213M	Seamless Ferritic and Austenitic Alloy-Steel Boiler, Superheater, and Heat-Exchanger Tubes
ASTM A249/A249M	Welded Austenitic Steel Boiler, Superheater, Heat-Exchanger, and Condenser Tubes
ASTM A268/A268M	Seamless and Welded Ferritic and Martensitic Stainless Steel Tubing for General Service
ASTM A269/A269M	Seamless and Welded Austenitic Stainless Steel Tubing for General Service
ASTM A270/A270M	Seamless and Welded Austenitic and Ferritic/Austenitic Stainless Steel Sanitary Tubing
ASTM A312/A312M	Seamless, Welded, and Heavily Cold Worked Austenitic Stainless Steel Pipes
ASTM A358/A358M	Electric-Fusion-Welded Austenitic Chromium-Nickel Stainless Steel Pipe for High-Temperature Service and General Applications
ASTM A409/A409M	Welded Large Diameter Austenitic Steel Pipe for Corrosive or High-Temperature Service
ASTM A450/A450M	General Requirements for Carbon and Low Alloy Steel Tubes
ASTM A451/A451M	Centrifugally Cast Austenitic Steel Pipe for High-Temperature Service
ASTM A511/A511M	Seamless Stainless Steel Mechanical Tubing and Hollow Bar
ASTM A530/A530M	General Requirements for Specialized Carbon and Alloy Steel Pipe
ASTM A554	Welded Stainless Steel Mechanical Tubing
ASTM A632	Seamless and Welded Austenitic Stainless Steel Tubing (Small-Diameter) for General Service
ASTM A778/A778M	Welded, Unannealed Austenitic Stainless Steel Tubular Products
ASTM A789/A789M	Seamless and Welded Ferritic/Austenitic Stainless Steel Tubing for General Service
ASTM A790/A790M	Seamless and Welded Ferritic/Austenitic Stainless Steel Pipe
ASTM A872/A872M	Centrifugally Cast Ferritic/Austenitic Stainless Steel Pipe for Corrosive Environments
ASTM A928/A928M	Ferritic/Austenitic (Duplex) Stainless Steel Pipe Electric Fusion Welded with Addition of Filler Metal
ASTM A999/A999M	General Requirements for Alloy and Stainless Steel Pipe
ASTM A1016/A1016M	General Requirements for Ferritic Alloy Steel, Austenitic Alloy Steel, and Stainless Steel Tubes
AS 1528.1	Stainless Steel Tube and Tubes Fittings for Food Processing and Hygienic Applications – Part 1, Tubes
AS 1769	Welded Stainless Steel Tubes for Plumbing Standards
AS 4041	Pressure Piping
AS 4254	Ductwork for Air-Handling Systems in Buildings
AS 5200.053	Plumbing and Drainage Products, Part 053: Stainless Steel Pipes and Tubes for Pressure Applications
ASME B31	Series of codes covering piping codes for various applications
ASME B31.1	Code for Power Piping

PIPE AND TUBE

Relevant Standards (Continued)

ASME B31.3	Code for Process Piping
ASME B31.4	Code for Pipeline Transportation Systems for Liquids and Slurries
ASME B31.5	Code for Refrigeration Piping and Heat Transfer Components
ASME B31.8	Code for Gas Transmission and Distribution Piping Systems
ASME B31.9	Code for Building Services Piping
ASME B36.10M	Dimensional Standard for Welded and Seamless Wrought Steel Pipe
ASME B36.19M	Dimensional Standard for Stainless Steel Pipe

You're in safe hands



Over **80 years experience**, providing the highest quality AS1528 food tube and fittings and associated stainless steel components for major food and beverage projects, upgrades and on-going maintenance.

We make it happen!

Contact us: 1800 428 527
atlassteels.com.au



EIGHT SPECIALIST SERVICE CENTRES THROUGHOUT AUSTRALIA: Brisbane, Mackay, Sydney, Newcastle, Melbourne, Shepparton, Adelaide, Launceston



STAINLESS STEEL PIPE

DN	NPS	OD (mm)	SCH	WT (mm)	304H SMLS	304/304L SMLS	304L WLD	310S/310H SMLS	321/321H SMLS	316/316L SMLS	316L WLD	904L	DUPLEX WLD	DUPLEX SMLS	SUPER DUPLEX WLD	SUPER DUPLEX SMLS	
6	1/8	10.3	10S	1.24						•	•						
			40S	1.73						•	•						
			80S	2.41							•	•					
8	1/4	13.7	10S	1.65						•							
			40S	2.24						•	•						
			80S	3.02							•						
10	3/8	17.1	10S	1.65						•							
			40S	2.31						•	•						
			80S	3.20							•						
15	1/2	21.3	10S	2.11		•	•			•	•			•		•	
			40S	2.77	•	•	•	•	•	•	•	•	•		•		•
			80S	3.73	•	•		•	•	•	•	•	•		•		•
			100S	4.75		•					•				•		•
			XXS	7.47		•					•				•		•
20	3/4	26.7	10S	2.11		•	•			•	•			•		•	
			40S	2.87	•	•	•	•	•	•	•	•	•		•		•
			80S	3.91	•	•		•	•	•	•	•	•		•		•
			160S	5.54	•	•		•	•	•	•	•	•		•		•
			XXS	7.82							•				•		•
25	1	33.4	10S	2.77		•	•			•	•	•		•		•	
			40S	3.38	•	•	•	•	•	•	•	•	•		•		•
			80S	4.55	•	•		•	•	•	•	•	•		•		•
			160S	6.35	•	•					•				•		•
			XXS	9.09							•				•		•
32	1 1/4	42.2	10S	2.77		•	•			•	•			•		•	
			40S	3.56		•	•			•	•			•		•	
			80S	4.85		•					•	•			•		•
			160S	6.35							•				•		•
40	1 1/2	48.3	10S	2.77		•	•			•	•			•		•	
			40S	3.68	•	•	•	•	•	•	•	•	•		•		•
			80S	5.08	•	•		•	•	•	•	•	•		•		•
			160S	7.14	•	•					•				•		•
			XXS	10.16							•				•		•
50	2	60.3	10S	2.77		•	•			•	•	•		•		•	
			40S	3.91	•	•	•	•	•	•	•	•	•		•		•
			80S	5.54	•	•		•	•	•	•	•	•		•		•
			160S	8.71	•	•					•				•		•
			XXS	11.07							•				•		•
65	2 1/2	73.0	10S	3.05		•	•			•	•			•		•	
			40S	5.16	•	•	•	•	•	•	•	•		•		•	
			80S	7.01	•	•		•	•	•	•	•		•		•	
			160S	9.53	•	•					•				•		•
80	3	88.9	10S	3.05		•	•			•	•	•		•		•	
			40S	5.49	•	•	•	•	•	•	•	•	•		•		•
			80S	7.62	•	•		•	•	•	•	•			•		•
			160S	11.13	•	•					•				•		•
			XXS	15.24							•				•		•

This table continues on page 71.

Your pipeline to the best pipe, tube, fittings and flanges.

Premium Australian-processed stainless steel, when and how you need it.



For smooth, standout projects and homegrown reliability, choose your pipe and tube products from Midway Metals.

Our national network of processing, warehousing and delivery facilities make it happen.



Fit-for-purpose solutions



The best materials



Fast turnaround



On-schedule delivery

Huge range of products, sizes and custom-made options

- Seamless & welded pipe.
- Buttweld, threaded & socketweld fittings.
- Round, square, rectangular, architectural tube.
- Tube, hygienic, BSM/RJT & Triclover fittings.
- Tube clamps, valves & equipment.
- Compression & auxiliary fittings.
- Feet, inserts, tube saddles, rings & caps.

Flanges that fit

- Plate, forged, concealed & expansion.
- Full machining capabilities for custom and non-standard flanges up to 460mm OD in any thickness.
- Certified and traceable materials and finishes.
- Meet your safety standards, volume needs, schedule and specifications.



Midway Metals

Reliability through capability

Albury	02 6041 4000
Brisbane	07 3382 9500
Melbourne	03 9791 5111
Newcastle	02 4088 2600
Perth	08 9248 6944
Sydney	02 9670 8900
Townsville	07 4728 8777

Pipe | Tube | Bar | Fittings | Flanges | Valves | Coil
Sheet | Plate | Welding Consumables | Cleaning Chemicals

midwaymetals.com.au

STAINLESS STEEL PIPE (CONTINUED)

DN	NPS	OD (mm)	SCH	WT (mm)	304H SMLS	304/304L SMLS	304L WLD	310S/310H SMLS	321/321H SMLS	316/316L SMLS	316L WLD	904L	DUPLEX WLD	DUPLEX SMLS	SUPER DUPLEX WLD	SUPER DUPLEX SMLS		
90	3 1/2	101.6	10S	3.05			•			•	•							
			40S	5.74			•			•	•							
			80S	8.08							•							
100	4	114.3	10S	3.05		•	•			•	•	•		•		•		
			40S	6.02	•	•	•	•	•	•	•	•	•		•		•	
			80S	8.56	•	•		•	•	•	•	•				•		•
			120S	11.13												•		
			160S	13.49	•	•					•					•		•
			XXS	17.12							•					•		•
125	5	141.3	10S	3.40			•				•							
			40S	6.55		•	•		•	•	•							
			80S	9.53		•	•		•									
150	6	168.3	10S	3.40		•	•			•	•			•	•	•		
			40S	7.11	•	•	•	•	•	•	•	•			•	•	•	
			80S	10.97	•	•	•	•	•							•		•
			120S	14.27			•									•		
			160S	18.24			•									•		•
			XXS	21.95			•									•		•
200	8	219.1	10S	3.76		•	•			•	•		•		•			
			40S	8.18			•	•	•	•	•	•			•		•	
			80S	12.70		•			•	•						•		•
			100S	15.06												•		
			120S	18.24												•		
			160S	23.01												•		
250	10	273.1	10S	4.19		•	•			•	•		•		•			
			40S	9.27		•	•			•	•			•		•		
			80S	12.70			•				•	•						
			120S	21.41											•			
			140S	25.40											•			
			160S	28.58											•			
300	12	323.9	10S	4.57			•			•	•		•			•		
			40S	9.53			•				•	•		•			•	
			80S	12.70							•			•				
350	14	355.6	10S	4.78			•				•		•					
			40S	9.53			•				•	•		•				
			80S	12.70								•						
400	16	406.4	10S	4.78			•				•		•					
			40S	9.53		•	•				•	•		•				
			80S	12.70								•						
450	18	457	10S	4.78			•				•		•					
			40S	9.53							•	•		•				
			80S	12.70								•						

This table continues on next page.

STAINLESS STEEL PIPE (CONTINUED)

DN	NPS	OD (mm)	SCH	WT (mm)	304H SMLS	304/304L SMLS	304L WLD	310S/310H SMLS	321/321H SMLS	316/316L SMLS	316L WLD	904L	DUPLEX WLD	DUPLEX SMLS	SUPER DUPLEX WLD	SUPER DUPLEX SMLS	
500	20	508	10S	5.54			•				•		•				
			40S	9.53							•		•				
			80S	12.70								•					
600	24	609.6	10S	6.35			•				•		•				
			40S	9.35							•		•				
			80S	12.70								•					
700	28	711.2	10S	7.92						•							
750	30	762.0	10S	7.92						•							
800	32	812.8	10S	7.92						•							
900	36	914.4	10S	7.92						•							



PICKLING PASSIVATION ELECTROPOLISHING




Helping industry to 'get it right'

Anywhere, anytime > Australia – South Pacific

PROCHEM

Your Source for Local Supply and Support

TUBE | PIPE | FITTINGS | FLANGES | VALVES
PHARMACEUTICAL | INSTRUMENTATION

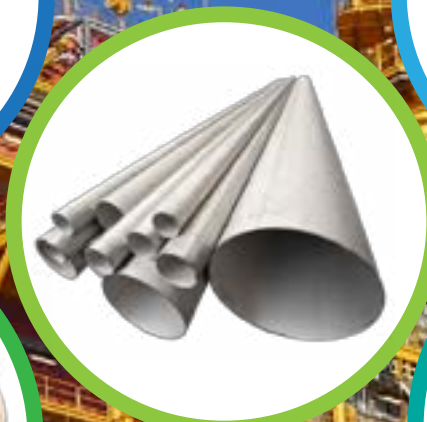

ADELAIDE • BRISBANE • HOBART • MELBOURNE • PERTH • SYDNEY

www.prochem.com.au | 1300 287 777 | sales@prochem.com.au

STAINLESS STEEL ROUND TUBE

OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	304 AW	304 AW POL	304 AWA	304 AWA POL	304 AS 1528	304 SMLS	316 AW	316 AW POL	316 AWA	316 AWA POL	316 AS 1528	316 AWA CW	316 SMLS	316 MIRROR POL	321 SMLS	409 AW	2205 AWA CW
3.18	0.41									•								
	0.70													•				
	0.79																	
	0.89													•				
	0.90													•				
4.76	0.50	•		•														
	0.90													•				
6.35	0.50	•		•														
	0.70			•												•		
	0.90					•						•		•		•		
	1.20						•							•				
	1.65													•				
7.94	0.50			•														
	0.90					•						•		•				
	1.20					•						•		•				
9.53	0.50	•		•														
	0.90					•						•		•		•		
	1.20	•	•	•		•	•	•	•	•		•		•		•		
	1.60	•		•				•	•	•				•		•		
11.11	1.20	•		•														
12.70	0.50	•		•														
	0.70	•	•	•										•				
	0.90					•	•					•		•		•		
	1.20	•	•	•		•	•	•	•	•	•	•		•		•		
	1.60	•	•	•	•	•	•	•	•	•	•	•		•		•		
	2.00													•		•		
	2.11													•				
	2.60													•				
15.88	0.50			•														
	0.70	•	•															
	0.90					•						•						
	1.20	•	•	•		•		•		•		•		•				
	1.60	•	•			•		•	•	•	•	•		•		•		
19.05	0.50	•																
	0.70	•						•										
	0.90					•						•		•				
	1.20	•	•	•	•	•	•	•	•	•	•	•		•	•			
	1.60	•	•	•	•	•	•	•	•	•	•	•		•	•	•		•
	2.00			•										•				
	2.11													•				
	2.64													•				
	2.77													•				
	3.25													•				
22.20	0.90					•						•						
	1.20	•	•	•	•	•		•	•	•	•	•			•			
	1.60	•	•	•	•	•		•	•	•	•	•		•	•	•		
25.40	0.90					•						•						
	1.20	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•

This table continues on page 76.

Please see end of table (page 77) for notes on seamless tube, food tube and ferritic tube.

Member of ASSDA NTHA AMTIL
ATGE Organizer

*OZ Stocks, Free Samples
Quick Delivery & Easy Returns.*



Cutting Discs



Flap Disc



Velcro Sanding Discs



STAINLESS STEEL ROUND TUBE (CONTINUED)

OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	304 AW	304 AW POL	304 AWA	304 AWA POL	304 AS 1528	304 SMLS	316 AW	316 AW POL	316 AWA	316 AWA POL	316 AS 1528	316 AWA CW	316 SMLS	316 MIRROR POL	321 SMLS	409 AW	2205 AWA CW
	2.00	•		•		•						•		•				
	2.11													•				
	2.64													•				
	2.77													•				
	3.20													•				
	3.25													•				
28.58	0.90					•						•						
	1.20		•			•			•			•						
	1.60	•	•			•			•			•						
	2.00					•						•						
31.75	0.90					•						•						
	1.20	•	•	•		•				•	•	•						
	1.60	•	•	•	•	•		•	•	•	•	•		•	•			
	2.00	•				•						•						
	3.20													•				
34.93	0.90					•						•						
	1.20					•						•						
	1.60					•						•						
	2.00					•						•						
38.10	0.70	•		•										•				
	1.20	•	•	•	•	•		•		•	•	•	•	•				
	1.50																•	
	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•
	2.00	•		•		•						•		•				
	3.20													•				
41.27	1.20		•															
	1.50																•	
	1.60		•															
44.45	1.20					•						•						
	1.50																•	
	1.60	•	•	•	•	•			•			•			•			
	2.00					•						•						
	2.64													•				
47.62	1.50																•	
	1.60				•													
50.80	1.20	•	•			•			•		•	•		•				
	1.50																•	
	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•
	2.00	•		•		•		•		•		•						
	3.00		•						•						•			
	3.20													•	•		•	
	3.25	•		•														
57.15	1.20					•						•						
	1.60		•			•						•						
	2.00					•						•						
57.50	1.50																•	
	1.60	•																
63.50	1.20					•						•						
	1.50																•	
	1.60	•	•	•	•	•		•	•	•	•	•	•	•	•			

This table continues on next page.

Please see end of table (page 73) for notes on seamless tube, food tube and ferritic tube.

STAINLESS STEEL ROUND TUBE (CONTINUED)

OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	304 AW	304 AW POL	304 AWA	304 AWA POL	304 AS 1528	304 SMLS	316 AW	316 AW POL	316 AWA	316 AWA POL	316 AS 1528	316 AWA CW	316 SMLS	316 MIRROR POL	321 SMLS	409 AW	2205 AWA CW
	2.00	•				•			•			•					•	•
	3.25													•				
70.00	1.60		•															
76.20	1.60	•	•	•	•	•		•	•	•	•	•	•	•				
	2.00	•		•		•		•				•						•
	3.00	•							•									
	3.20	•												•				
	3.25	•												•				
88.90	1.60	•	•	•				•		•			•					
101.60	1.60	•	•	•	•	•		•	•	•	•	•	•					
	2.00	•				•		•		•		•						•
	3.25	•												•				
127.00	1.60	•				•		•		•		•						
	2.00					•						•						
152.40	1.60		•			•		•	•	•		•						
	2.00	•	•			•		•	•			•						
203.20	2.00	•				•		•				•						
	2.50					•						•						
254.00	2.00	•				•		•				•						
	2.50					•						•						
	3.00					•						•						
304.80	2.00	•				•		•				•						
	2.50					•						•						
	3.00					•						•						

Seamless tube will normally be cold drawn (CD) and annealed (ANN) - hence these descriptions are not included in SMLS columns.

Food tubing available to AS 1528 Part 1 is CW (weld bead removed) with either AW or ANN and either polished or unpolished. The sizes in this table are from the 2019 revision while the 2001 standard was more limited in small and large sizes and wall thickness. Check with suppliers before detailed design.

There is also ferritic tubing with corrosion resistance suitable for rural environments with OD 25.40 (wt 1.20 and 1.60) and OD 31.75 (wt 1.20 and 1.60).

316L PHARMACEUTICAL GRADE TUBE AND FITTINGS

OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	TUBING		ELBOWS 45°		ELBOWS 90°		ELBOWS 180°		EQUAL TEES		REDUCING TEES		CONCENTRIC REDUCERS		ECCENTRIC REDUCERS		END CAPS	
		SF1	SF4	SF1	SF4	SF1	SF4	SF1	SF4	SF1	SF4	SF1	SF4	SF1	SF4	SF1	SF4	SF1	SF4
6.35	0.89	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
9.53	0.89	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
12.70	1.65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
15.88	1.65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
19.05	1.65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
25.40	1.65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
31.75	1.65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
38.10	1.65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
50.80	1.65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
63.50	1.65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
76.20	1.65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
101.60	2.11	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
127.00	2.11	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
152.40	2.77	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Supplied to ASME BPE.

SF1 finish: Mechanically polished to R_a , max < 0.51µm.

SF4 finish: Electro-polished to R_a , max < 0.38µm.

Double bolted clamps and gaskets are also stocked in sizes to suit.

6.35 mm and 9.53 mm sizes are seamless, remainder and seam welded.

STAINLESS STEEL OVAL TUBE

(mm)	(mm)	WALL THICKNESS (mm)	316 MIRROR
20	30	1.50	•
20	50	1.50	•
28	46	1.50	•
62	38	1.50	•
75	42	1.50	•
110	40	1.50	•

STAINLESS STEEL SQUARE TUBE

WALL THICKNESS (mm)	SIZE ACROSS FLATS (mm)	304			316			
		MILL	180 GRIT	MIRROR	MILL	180 GRIT	320 GRIT	MIRROR
0.90	12.70 x 12.70		•					
1.20	12.70 x 12.70		•			•		
	15.88 x 15.88							
1.50	19.05 x 19.05	•	•					
	22.22 x 22.22		•					
	25.40 x 25.40	•	•					
	31.80 x 31.80		•					
	50.80 x 50.80		•					
	12.00 x 12.00							•
1.60	12.70 x 12.70		•			•		
	15.00 x 15.00							•
	19.00 x 19.00							•
	25.40 x 25.40							•
	31.80 x 31.80							•
	38.10 x 38.10							•
	50.80 x 50.80							•
	12.70 x 12.70		•					
2.00	19.05 x 19.05		•					
	22.22 x 22.22							
	25.40 x 25.40		•			•		
	31.80 x 31.80		•			•		
	38.10 x 38.10		•	•		•		
	50.80 x 50.80		•			•		
	60.00 x 60.00		•					
3.00	80.00 x 80.00		•					
	25.40 x 25.40		•					
	31.80 x 31.80		•					
	38.10 x 38.10		•					
3.00	50.80 x 50.80		•					
	25.40 x 25.40		•					
	38.10 x 38.10		•			•		
	50.80 x 50.80		•		•		•	•

This table continues on next page.

STAINLESS STEEL SQUARE TUBE (CONTINUED)

WALL THICKNESS (mm)	SIZE ACROSS FLATS (mm)	304			316			
		MILL	180 GRIT	MIRROR	MILL	180 GRIT	320 GRIT	MIRROR
3.00	60.00 x 60.00		•					
	80.00 x 80.00		•		•		•	•
	100.00 x 100.00		•		•	•	•	
	150.00 x 150.00		•					
4.00	50.00 x 50.00		•					
5.00	80.00 x 80.00					•		
	100.00 x 100.00		•			•		
	150.00 x 150.00		•			•		
6.00	200.00 x 200.00		•					

STAINLESS STEEL RECTANGULAR TUBE

SIZE ACROSS FLATS (mm)	WALL THICKNESS (mm)	304			316				
		MILL	180 GRIT	320 GRIT	MILL	180 GRIT	320 GRIT	400 GRIT	MIRROR
31.75 x 12.70	1.20		•						
	1.60		•						
38.10 x 12.70	1.20		•						
38.10 x 25.40	1.20	•	•						
	1.60		•			•			
40 x 10	1.20		•						
	1.50		•			•			
40 x 20	1.20		•			•			
	1.60		•	•		•			
	2.00		•			•			
50 x 10	1.50		•			•			
	1.60		•						
50 x 25	1.20		•			•			
	1.50		•						•
	1.60		•			•			
	3.00		•			•		•	
50.80 x 25.40	1.20		•						
	1.60		•			•			
	2.00		•						
	3.00		•						
60 x 40	1.50								•
	2.00								•
	3.00		•			•			
65 x 38	3.00		•			•			
75 x 25	1.60						•		
76.20 x 25.40	1.60		•			•			
80 x 40	1.50		•						•
	1.60		•						
	3.00	•	•		•	•	•		
84.10 x 38.10	1.60		•			•			
84 x 38	3.00		•			•			
100 x 50	2.00		•			•			
	3.00		•	•	•	•	•		
	5.00	•	•			•			
100 x 75	5.00		•						
150 x 100	5.00					•			
200 x 100	6.00		•			•			

May be available in AW and AWBP finishes.

PIPE AND TUBE FITTINGS



PIPE AND TUBE FITTINGS

Product Description

Fittings are parts used in a piping system to change direction or function and are mechanically joined to the system.

Fitting systems for pipe include butt weld pipe fittings, low pressure screwed fittings and high pressure screwed and socket weld fittings.

Flanges, used to connect pipe sections and to allow for rapid servicing, are used primarily for pipe and are available in various forms and pressure ratings to suit a range of applications. Refer to *Section 8.6 Flanges of ASSDA's 2020 Australian Stainless Reference Manual* for descriptions and illustrations.

Fitting systems appropriate for tube include butt weld tube fittings, food service fittings and compression tube fittings.

Refer to *Section 8.5 Fittings of ASSDA's 2020 Australian Stainless Reference Manual* for descriptions and illustrations of fitting types.

Relevant Standards

Butt weld pipe fittings

ASME B16.9	Factory-Made Wrought Buttwelding Fittings
MSS SP-43	Wrought and Fabricated Butt-Welding Fittings for Low Pressure, Corrosion Resistant Applications

Thread Forms

AS ISO 7.1	Pipe threads where pressure-tight joints are made on the threads Dimensions, tolerances and designation
ASME B1.20.1	Pipe Threads, General Purpose, Inch

Low pressure screwed fittings

ISO 4144	Pipework – Stainless Steel Fittings in Accordance with ISO 7-1
----------	--

High pressure screwed (NPT) and socket weld pipe fittings

ASTM A182/A182M	Forged and Rolled Alloy and Stainless Steel Pipe Flanges, Forged Fittings, and Valves and Parts for High-Temperature Service
ASME B16.11	Forged Fittings, Socket-Welding and Threaded
MSS SP-79	Socket-Welding Reducer Inserts
MSS SP-83	Class 3000 and 6000 Pipe Unions, Socket Welding and Threaded (Carbon Steel, Alloy Steel, Stainless Steels, and Nickel Alloys)
MSS SP-95	Swage(d) Nipples and Bull Plugs

Food and hygienic tube fittings

AS 1528.2	Stainless Steel Tube and Tube Fittings for Food Processing and Hygienic Applications, Part 2: Screwed Tube Couplings
AS 1528.3	Stainless Steel Tube and Tube Fittings for Food Processing and Hygienic Applications, Part 3: Screwed Tube Couplings
AS 1528.4	Stainless Steel Tube and Tube Fittings for Food Processing and Hygienic Applications, Part 4: Clamp Tube Fittings

Flanges

AS 2129	Flanges for Pipes, Valves and Fittings
AS/NZS 4087	Metallic Flanges for Waterworks Purposes
ASME B16.5	Pipe Flanges and Flanged Fittings: NPS ½ Through NPS 24 Metric/Inch Standard
ASME B16.47	Large Diameter Steel Flanges: NPS 26 Through NPS 60 Metric/Inch Standard
ASME B16.36	Orifice Flanges

PIPE BUTT WELDED FITTINGS

SIZE DN	SCH	45° LONG RADIUS ELBOW			90° LONG RADIUS ELBOW			90° SHORT RADIUS ELBOW			EQUAL TEE			REDUCING TEE			CAP			TYPE A STUB END			TYPE B STUB END			CONCENTRIC REDUCER			ECCENTRIC REDUCER		
		304 /L	316 /L	2205 /L	304 /L	316 /L	2205 /L	304 /L	316 /L	2205 /L	304 /L	316 /L	2205 /L	304 /L	316 /L	2205 /L	304 /L	316 /L	2205 /L	304 /L	316 /L	2205 /L	304 /L	316 /L	2205 /L	304 /L	316 /L	2205 /L			
15	10S		
	40S		
	80S		
20	10S		
	40S		
	80S		
25	10S		
	40S		
	80S		
32	10S		
	40S		
	80S		
40	10S		
	40S		
	80S		
50	10S		
	40S		
	80S		
65	10S		
	40S		
	80S		
80	10S		
	40S		
	80S		
90	10S		
	40S		
	80S		
100	10S		
	40S		
	80S		
125	10S		
	40S		
	80S		

This table continues on next page.

PIPE SOCKET WELD 3000lbs FITTINGS

SIZE DN	45° ELBOW		90° ELBOW			EQUAL TEE			CAP		COUPLING		REDUCING COUPLING		UNION		REDUCING TEES		
	304 /L	316 /L	304 /L	316 /L	2205	304 /L	316 /L	2205	304 /L	316 /L	304 /L	316 /L	304 /L	316 /L	304 /L	316 /L	304 /L	316 /L	2205
6		•		•			•				•				•				
8	•	•	•	•		•	•		•	•	•	•			•	•			
10	•	•	•	•		•	•		•	•	•	•			•	•			
15	•	•	•	•	•	•	•	•	•	•	•	•			•	•			
20	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	20 x 15	20 x 15	20 x 15
25	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	25 x 15, 25 x 20	25 x 15, 25 x 20	25 x 15, 25 x 20
32		•		•	•		•				•				•		32 x 25	32 x 20, 32 x 25	32 x 20, 32 x 25
40	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	40 x 25, 40 x 32	40 x 25, 40 x 32	40 x 25, 40 x 32
50	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	50 x 32, 50 x 40	50 x 32, 50 x 40	50 x 32, 50 x 40

PIPE SCREWED 150lbs FITTINGS (316/L)

SIZE DN	45° ELBOW	90° ELBOW	90° M&F ELBOW	EQUAL TEE	HEXAGON CAP	SOCKET	REDUCING SOCKET	HEXAGON NIPPLE	BARREL NIPPLE	REDUCING NIPPLE	REDUCING BUSH	LOCK NUT	THREE PIECE UNION	SQUARE HEAD PLUG TAPERED	HEXAGON HEAD PLUG TAPERED
6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
15	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
20	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
25	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
32	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
50	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
65	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
80	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
90					•	•	•	•	•	•	•		•		•
100	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
125						•						•			
150						•						•			

PIPE SCREWED HIGH PRESSURE FITTINGS (316/L)

SIZE DN	THREAD	PSI	45° ELBOW	90° ELBOW	EQUAL TEE	CAP	COUPLING	REDUCING COUPLING	HALF COUPLING	HEXAGON NIPPLE	REDUCING NIPPLE	REDUCING BUSH	THREE PIECE UNION	HEXAGON HEAD PLUG TAPERED
6	NPT	3000	•	•	•	•	•		•	•			•	•
		6000												
8	NPT	3000	•	•	•	•	•		•	•	•	•	•	•
		6000												•
10	NPT	3000	•	•	•	•	•		•	•	•	•	•	•
		6000										•		•
15	NPT	3000	•	•	•	•	•	•	•	•	•	•	•	•
		6000								•		•		•
20	NPT	3000	•	•	•	•	•	•	•	•	•	•	•	•
		6000										•		•
25	NPT	3000	•	•	•	•	•	•	•	•	•	•	•	•
		6000										•		•
32	NPT	3000	•	•	•	•	•	•	•	•	•	•	•	•
		6000										•		•
40	NPT	3000	•	•	•	•	•	•	•	•	•	•	•	•
		6000										•		•
50	NPT	3000	•	•	•	•	•	•	•	•	•	•	•	•
		6000										•		•

FLANGES

ANSI FLANGES

SLIP ON RAISED FACE

SIZE DN	GRADE													
	304L					316L					2205			2507
	150 lb	300 lb	600 lb	900 lb	1500 lb	150 lb	300 lb	600 lb	900 lb	1500 lb	150 lb	300 lb	600 lb	150 lb
15	•	•	•	•	•	•	•	•	•	•	•			
20	•	•	•	•	•	•	•	•	•	•	•			
25	•	•	•	•	•	•	•	•	•	•	•	•	•	•
32	•	•	•	•	•	•	•	•	•	•	•			
40	•	•	•	•	•	•	•	•	•	•	•	•	•	•
50	•	•	•	•	•	•	•	•	•	•	•	•	•	•
65	•	•	•	•	•	•	•	•	•	•				•
80	•	•	•	•	•	•	•	•	•	•	•	•	•	•
100	•	•	•	•	•	•	•	•	•	•	•	•	•	•
125	•	•	•	•	•	•	•	•	•	•	•			
150	•	•	•	•	•	•	•	•	•	•	•	•	•	•
200	•	•	•	•	•	•	•	•	•	•	•	•	•	•
250	•	•	•	•	•	•	•	•	•	•				•
300	•					•	•	•	•	•				•
350	•					•	•	•	•	•				•
400	•					•	•	•	•	•				•
450	•					•	•	•	•	•				•
500	•					•	•	•	•	•				
550						•	•	•	•	•				
600	•					•	•	•	•	•				

WELD NECK RAISED FACE

SIZE DN	GRADE																						
	304L						316L						2205						2507				
	150 lb		300 lb		600 lb	900 lb	1500 lb	150 lb		300 lb		600 lb	900 lb	1500 lb	150 lb		300 lb		600 lb	150 lb			
RATING	10S	40S	40S	80S	80S	80S	80S	10S	40S	80S	40S	80S	80S	80S	80S	10S	40S	80S	40S	80S	80S	40S	
15	•	•	•	•	•		•	•	•	•	•	•	•		•	•	•					•	
20	•	•	•	•	•		•	•	•	•	•	•	•		•		•	•					•
25	•	•	•	•	•		•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•
32	•	•	•	•	•		•		•	•	•				•			•					•
40	•	•	•	•	•		•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•
50	•	•	•	•	•		•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•
65	•	•	•	•	•			•	•	•	•	•	•					•					•
80	•	•	•	•	•	•		•	•	•	•	•	•	•		•	•	•	•	•	•	•	•
100	•	•	•	•	•	•		•	•	•	•	•	•	•		•	•	•	•	•	•	•	•
125	•	•	•	•	•	•		•	•	•				•				•					
150	•	•	•	•	•	•		•	•	•	•	•	•	•		•	•	•	•	•	•	•	•
200	•	•	•	•	•	•		•	•	•	•	•	•	•		•	•	•	•	•	•	•	•
250	•	•	•	•	•			•	•														
300	•	•						•	•														
350									•														
400									•														
450									•														
500									•														
550																							
600									•														

In some pressure categories, larger schedules are available, including XS, Sch160 and XXS.

BLIND RAISED FACE

SIZE DN	GRADE													
	304L					316L					2205			2507
RATING	150 lb	300 lb	600 lb	900 lb	1500 lb	150 lb	300 lb	600 lb	900 lb	1500 lb	150 lb	300 lb	600 lb	150 lb
15	•	•	•	•	•	•	•	•	•	•	•			•
20	•	•	•	•	•	•	•	•	•	•	•			•
25	•	•	•	•	•	•	•	•	•	•	•	•	•	•
32	•	•	•	•	•	•	•	•	•	•	•			
40	•	•	•	•	•	•	•	•	•	•	•	•	•	•
50	•	•	•	•	•	•	•	•	•	•	•	•	•	•
65	•	•	•	•	•	•	•	•	•	•	•			
80	•	•	•	•	•	•	•	•	•	•	•	•	•	•
100	•	•	•	•	•	•	•	•	•	•	•	•	•	•
125	•	•	•	•	•	•	•	•	•	•	•			
150	•	•	•	•	•	•	•	•	•	•	•	•	•	•
200	•	•	•	•	•	•	•	•	•	•	•	•	•	•
250	•	•	•	•	•	•	•	•	•	•				
300	•					•	•	•	•	•				
350	•					•	•	•	•	•				
400	•					•	•	•	•	•				
450	•					•	•	•	•	•				
500	•					•	•	•	•	•				
550						•	•	•	•	•				
600	•					•	•	•	•	•				

SOCKET WELD FLANGES

SIZE DN	GRADE													
	304L					316L						2205	2507	
RATING	150 lb	300 lb	600 lb	900 lb	1500 lb	150 lb	150 lb	300 lb		600 lb	900 lb	1500 lb	150 lb	150 lb
	10S	40S	40S	80S	80S	40S	80S	40S	80S	40S	80S	80S	10S	10S
15						•	•	•	•					
20						•	•	•	•					
25						•	•	•	•					
32						•	•	•	•					
40						•	•	•	•					
50						•	•	•	•					

BOSSED BLIND RAISED FACE

SIZE DN	GRADE											
	304L					316L					2205	2507
RATING	150 lb	300 lb	600 lb	900 lb	1500 lb	150 lb	300 lb	600 lb	900 lb	1500 lb	150 lb	150 lb
15						•						
20						•						
25						•						
32						•						
40						•						
50						•						
80						•						

Exceptional corrosion resistance, durability, sleek good looks and complete recyclability: These features combined have made stainless steel a popular material for industrial and domestic applications worldwide.

As the use of stainless steel in existing applications grow, so too does the range of new applications where stainless steel is proving to be the material of choice in even the most demanding environments.

So, why stainless?

ASSDA's **Australian Stainless Reference Manual** is an industry guide and comprehensive resource providing both basic and advanced information on stainless steel.

The 232-page Manual opens with a useful introduction to the material and contains a wealth of technical information, including:

- Properties and performance
- Grade selection

- Surface finishes
- Design
- Fabrication
- Product specifications
- Conversion tables

Assisting specifiers, fabricators and end-users of stainless steel for over two decades, the Manual is an essential guide for anyone connected with the building, manufacturing and design industries.

Contact ASSDA to order your copy:

+61 7 3220 0722 / assda@assda.asn.au
assda.asn.au



Australian Stainless Steel Development Assoc.



AS 2129 TABLE FLANGES

TABLE D FLANGES

SIZE DN	GRADE					
	304L		316L		2205	
	SLIP ON	BLIND	SLIP ON	BLIND	SLIP ON	BLIND
15	•	•				
20	•	•	•			
25	•	•	•	•		
32			•	•		
40	•	•	•	•		
50	•	•	•	•		
65			•	•		
80	•	•	•	•	•	
100	•	•	•	•	•	
125			•	•	•	
150	•	•	•	•	•	
200	•	•	•	•	•	
250	•	•	•	•		
300	•	•	•	•		
350			•	•		
400			•	•		
450			•			
500	•		•			
550			•			
600	•		•			

TABLE E FLANGES

SIZE DN	GRADE								
	304L			316L			2205		
	SLIP ON	BLIND	SCREWED	SLIP ON	BLIND	SCREWED	SLIP ON	BLIND	SCREWED
15	•	•		•	•		•		
20	•	•		•	•		•		
25	•	•		•	•		•		
32	•			•	•		•		
40	•	•		•	•	•	•		
50	•	•		•	•	•	•		
65	•			•	•		•		
80	•	•		•	•	•	•		
100	•	•		•	•	•	•		
125	•			•	•		•		
150	•	•		•	•	•	•		
200	•	•		•	•		•		
250	•	•		•	•		•		
300	•	•		•	•		•		
350	•			•	•				
400	•			•	•				
450	•			•	•				
500				•	•				
550				•	•				
600				•	•				
750				•					

TABLE H FLANGES

SIZE DN	GRADE			
	304L		316L	
	SLIP ON	BLIND	SLIP ON	BLIND
15				
20			•	
25			•	
32				
40			•	
50			•	
65			•	
80			•	
100			•	
125				
150			•	
200			•	
250				
300			•	
350				
400				
450				
500				
550				
600				

TUBE BORE SIZING FLANGES

SIZE DN	TABLE D		TABLE E					
	316L		304L		316L		2205	
	SLIP ON	BLIND	SLIP ON	BLIND	SLIP ON	BLIND	SLIP ON	BLIND
12.7	•			•	•			
19.05	•			•	•			
25.4	•	•		•	•	•		
31.75	•	•			•	•		
38.1	•	•		•	•	•		
50.8	•	•	•	•	•	•	•	
63.5	•	•			•	•	•	
76.2	•	•		•	•	•	•	
101.6	•	•		•	•	•	•	
127	•	•	•		•	•		
152.4	•	•		•	•	•	•	
203.2	•	•		•	•	•		
254.0	•	•		•	•	•	•	•
304.8	•	•		•	•	•	•	•

AS 4087 WATERWORK FLANGES

	316L			
SIZE DN	PN 16		PN 35	
	SLIP ON	BLIND	SLIP ON	BLIND
15				
20				
25				
32				
40				
50	•	•		
65	•		•	
80	•	•		
100	•	•	•	
125				
150	•	•		
200	•	•	•	
250	•	•		
300	•	•	•	
350	•	•		
400	•	•		
450	•	•		
500	•	•		
600	•	•		
700	•			
750	•			
800	•			
900	•			
1000				
1200				

RECESSED RING JOINT TYPE UNIONS AND OTHER COMPONENTS (AS 1528.2: SECTION 2)

OD (mm/inch)	EXPANDED UNION	WELDED RJT STANDARD UNION	WELDED FLAT FACE UNION	WELDED AUSTRALIAN CREVICE FREE UNION	SLOTTED ROUND NUT	HEXAGON BLANK NUT	BLANK CAP
25.40 : 1	•	•	•	•	•	•	•
38.10 : 1 1/2	•	•	•	•	•	•	•
50.80 : 2	•	•	•	•	•	•	•
63.50 : 2 1/5	•	•	•	•	•	•	•
76.20 : 3	•	•	•	•	•	•	•
101.60 : 4	•	•	•	•	•	•	•
127.00 : 5		•	•	•	•	•	•
152.40 : 6		•	•	•	•	•	•

TRAPEZOIDAL THREAD TYPE SCREWED COUPLINGS AND OTHER COMPONENTS: IDF/ISO TYPE (AS 1528.2: SECTION 3)

OD (mm/inch)	EXPANDED COUPLING	WELDED COUPLING	SLOTTED ROUND NUT	BLANK CAP
25.40 : 1		•	•	•
38.10 : 1 1/2		•	•	•
50.80 : 2		•	•	•
63.50 : 2 1/5		•	•	•
76.20 : 3		•	•	•
101.60 : 4		•	•	•

NOTE: A coupling comprises of a male part/liner/hexagon nut/gasket.

CLAMP TUBE UNIONS AND OTHER COMPONENTS (AS 1528.4)

OD (mm/inch)	EXPANDED UNION	WELDED UNION	END CAP	GASKET		
				A	B	C
6.35 : 1/4	-			-	-	
9.53 : 3/8	-			-	-	
12.70 : 1/2	-	•	•	-	-	•
19.05 : 3/4	-	•	•	-	-	•
25.40 : 1	•	•	•	•	•	-
31.75 : 1 1/4		•	•	•	•	-
38.10 : 1 1/2	•	•	•	•	•	-
50.80 : 2	•	•	•	•	•	-
63.50 : 2 1/5	•	•	•	•	•	-
76.20 : 3	•	•	•	•	•	-
101.60 : 4	•	•	•	•	•	-
152.40 : 6	-	•	•	•	•	-
203.20 : 8	-	•	•	•	•	-
254.00 : 10	-	•	•	•	•	-
304.80 : 12	-	•	•	•	•	-

NOTE: (a) A Union comprises of 2 x liner/clamp/gasket.

(b) Items marked with "-", this size is not listed in the standard

PROPRIETARY TUBE COMPRESSION FITTINGS (316/L)

OD (mm/inch)	M&F ELBOW	M&F BRANCH TEE	M&F CONNECTOR	M&F BULKHEAD CONNECTOR	M&F RUN TEE	M&F ADAPTOR	UNION	UNION ELBOW	UNION TEE	REDUCING UNION	UNION BULKHEAD	PLUG	CAP	REDUCER PORT	REDUCING CONNECTOR
3.18 : 1/8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
4.76 : 3/16	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
6.35 : 1/4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
7.94 : 5/16	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
9.53 : 3/8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
12.70 : 1/2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
15.88 : 5/8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
19.05 : 3/4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
25.40 : 1	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
31.75 : 1 1/4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
38.10 : 1 1/2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
50.8 : 2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

These fittings are often used with seamless tube.

TUBE BUTT WELDED FITTINGS (AS 1528.3) [1/2]

OD (mm/ inch)	WT (mm)	45° BEND		90° BEND		180° BEND		EQUAL TEE		EQUAL CROSS		EQUAL PULLED TEE		EQUAL PULLED CROSS		EQUAL RADIUS TEE		REDUCING TEE	
		304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L
12.70 : 1/2	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
19.05 : 3/4	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
25.40 : 1	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00																		
31.75 : 1 1/4	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00																		
38.10 : 1 1/2	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00																		
50.80 : 2	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
63.50 : 2 1/2	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
76.20 : 3	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
101.60 : 4	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
127.00 : 5	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
152.40 : 6	1.60																		
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
203.20 : 8	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.50																		
254.00 : 10	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.50																		
304.80 : 12	3.00																		
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.50																		
	3.00																		

NOTE: The fittings in this table are all included in AS 1528.3. Designers are advised to check availability of fittings before finalising designs.

TUBE BUTT WELDED FITTINGS (AS 1528.3) [2/2]

OD (mm/ inch)	WT (mm)	REDUCING PULLED TEE		REDUCING CROSS		REDUCING PULLED CROSS		SWEPT TEE		45° TEE		Y PIECE		REDUCER* CONCENTRIC		REDUCER* ECCENTRIC	
		304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L	304/L	316/L
12.70 : 1/2	1.60	-	-	-	-	-	-	•	•	•	•	•	•	-	-	-	-
19.05 : 3/4	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
25.40 : 1	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00																
31.75 : 1 1/4	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00																
38.10 : 1 1/2	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
50.80 : 2	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
63.50 : 2 1/2	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
76.20 : 3	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
101.60 : 4	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
127.00 : 5	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
152.40 : 6	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
203.20 : 8	1.60														X		X
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.50																
254.00 : 10	1.60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.50																
	3.00																
304.80 : 12	1.60														X		X
	2.00	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.50																
	3.00																

NOTE: * See standard for details of height and possible straight sections to aid welding with reducers.

X Available but not currently in the standard, AS 1528.3

FASTENERS



FASTENERS

Product Description

A wide variety of fastening products (both screw and bolt type) are readily stocked. Grades available are 304 and 316, however some products are available in higher strength variants including duplex and super duplex stainless steels.

Bolts are generally referred to as being fastened with a backing nut, while screws primarily fasten through a tight bond with the material through which it penetrates.

Threads are generally stocked to both metric and UNC/UNF standards, depending on the specification to which they are produced.

Refer to *Section 8.8 Fasteners of ASSDA's 2020 Australian Stainless Reference Manual* for descriptions.

Types of Fasteners

Bolt-type

- Bolts
 - Cup head bolts
 - Hex head bolts
- Nuts
 - Collared lock nuts
 - Dome hex nuts
 - Flanged nuts
 - Hex nuts
 - Locking nuts
 - Serrated flange nuts
 - Shear nuts
 - Square nuts
 - Thin hex lock nuts
 - Wing nuts
- Threaded rod

Screw-type

- Socket
 - Button head socket
 - Cap head
- Countersunk flat socket
- Countersunk wood
- Grub socket
- Hex head
- Metric hex
- Mushroom head
- Pan head
- Cheese head
- Phillips/Slot head countersunk
- Round head
- Self-tapping
 - Countersunk
 - Pan head
 - Hex security
- Type 17 screws

Relevant Standards

Manufacturers generally supply to the industry accepted standards given in the left column. In some cases, there has been rationalisation and consolidation and ISO or ASME or other standards now cover the customary specification. In these cases, an alternative specification is provided in brackets.

ANSI B18.17	Wing Nuts, Thumb Screws, and Wing Screws – Fasteners in Customary Units (ASME B18.6.9 Wing Nuts (Inch Series))
ANSI/ASME B18.3	Socket Cap, Shoulder, and Set Screws (Inch Series)
ANSI/ASME B18.5	Round Head Bolts (Inch Series)
ANSI/ASME B18.6.4	Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws – Inch
AS 3501	Parallel Screw Threads of Whitworth Form (BSW and BSF) and Associated Gauges and Gauging Practice
AS/NZS 1427	ISO Metric Machine Screws
ASME B18.2.1	Square, Hex, Heavy Hex, and Askew Head Bolts and Hex, Heavy Hex, Hex Flange, Lobed Head, and Lag Screws (Inch Series)

FASTENERS

Relevant Standards Continued

ASME B18.2.2	Nuts for General Applications: Machine Screw Nuts, Hex, Square, Hex Flange, and Coupling Nuts (Inch Series)
BS 1083	Precision Hexagon Bolts, Screws, and Nuts (B.S.W. & B.S.F. Threads)
BS 450	Machine Screws and Machine Screw Nuts (B.S.W. & B.S.F. Threads)
DIN 1587	Hexagon Domed Cap Nuts, High Type
DIN 439-1	Unchamfered Hexagon Thin Nuts – Product Grade B (ISO 4035 Hexagon Thin Nuts Chamfered (Style 0) – Products Grades A and B)
DIN 557	Square Nuts; Product Grade C
DIN 571	Hexagon Head Wood Screws
DIN 603	Cup Head Square Neck Bolts
DIN 7894	Hexagon Socket Head Cap Screws With Low Head
DIN 7985H	Cross Recessed Raised Cheese Head Screw (ISO 10511 Prevailing Torque Type Hexagon Thin Nuts (With Non-Metallic Insert))
DIN 7991	Hexagon Socket Countersunk Head Cap Screws (ISO 10642 Fasteners – Hexagon Socket Countersunk Head Screws With Reduced Loadability)
DIN 84	Slotted Cheese Head Screws; Product Grade A (DIN EN ISO 1207 Slotted Cheese Head Screws – Product Grade A)
DIN 85	Slotted Pan Head Screws (DIN EN ISO 1580 Slotted Pan Head Screws – Product Grade A)
DIN 912	Timber Fasteners – Specifications for Connectors for Timbers
DIN 916	Hexagon Socket Set Screws with Cup Point (ISO 4029 Hexagon Socket Set Screws With Cup Point)
DIN 929	Hexagon Weld Nuts
DIN 931	Hexagon Head Bolts With Shank (ISO 4014 Hexagon Head Bolts – Product Grades A and B)
DIN 933	Hexagon Head Screw (ISO 4017 Fasteners – Hexagon Head Screws – Product Grades A and B)
DIN 934	Hexagon Nuts (ISO 4032 Hexagon Regular Nuts (Style 1) – Product Grades A and B)
DIN 963	Slotted Countersunk Head Screws (ISO 2009 Slotted Countersunk Flat Head Screws – Product Grade A)
DIN 964	Slotted Raised Countersunk Oval Head Screws (ISO 2010 Slotted Raised Countersunk Head Screws – Product Grade A)
DIN 965H	Cross Recessed Countersunk Flat Head Screws (ISO 7046-1 Countersunk Flat Head Screws (Common Head Style) with Type H or Type Z Cross Recess – Product Grade A – Part 1: Steels Screws of Property Class 4.8)
DIN 975	Threaded Rods (DIN 976-1 Fasteners – Stud Bolts – Part 1: Metric Thread)
DIN 976-1	Fasteners – Stud Bolts – Part 1: Metric Thread
DIN 985	Nylon Insert Hex Lock Nut (DIN EN ISO 10511 Prevailing Torque Type Hexagon Thin Nuts (With Non-Metallic Insert) (ISO 10511))

FASTENERS

Relevant Standards Continued

IFI 136	Studs and Bent Bolts (ASME B18.31.5 Bent Bolts (Inch Series))
IFI 145	Hex Flange Nuts and Large Hex Flange Nuts
ISO 3506.1	Fasteners - Mechanical properties of corrosion resistant stainless steel fasteners - Part 1: Bolts, screws and studs with specified grades and property classes
ISO 4014	Hexagon Head Bolts – Product Grades A and B
ISO 4017	Fasteners – Hexagon Head Screws – Product Grades A and B
ISO 4032	Hexagon Regular Nuts (Style 1) – Product Grades A and B
ISO 4161	Hexagon Nuts With Flange, Style 2 – Coarse Thread
ISO 4762	Hexagon Socket Head Cap Screws
ISO 7380	Hexagon Socket Button Head Screws
ISO 10642	Hexagon Socket Countersunk Head Screws
JIS B1112	Cross-Recessed Head Wood Screws

NOTE: HT88 and HT109 refer to strength.

BOLTS

CUP HEAD BOLTS

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
UNC (inch)	1/4	3/4		
	1/4	1		
	1/4	1-1/4		
	1/4	2		
	1/4	2-1/2		
	1/4	3		
	1/4	4		
	1/4	5		
	1/4	6		
	5/16	1		
	5/16	1-1/4		
	5/16	1-1/2		
	5/16	2		
	5/16	2-1/2		
	5/16	3		
	5/16	4		
	5/16	5		
	5/16	6		
	3/8	1		
	3/8	1-1/4		
	3/8	1-1/2		
	3/8	2		
	3/8	2-1/2		
	3/8	3		
	3/8	3-1/2		
	3/8	4		
	3/8	5		
	3/8	6		
	1/2	1-1/4		
	1/2	2		
	1/2	2-1/2		
	1/2	3		
	1/2	4		
	1/2	5		
	1/2	6		
METRIC (mm)	M10	20	M6	20
			M6	25
			M6	30
			M6	40
			M6	50
			M6	60

This table continues on next page.

CUP HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
METRIC (mm)			M6	70
			M6	80
			M8	20
			M8	25
			M8	30
			M8	40
			M8	50
			M8	60
			M8	80
			M8	100
			M10	25
			M10	30
			M10	40
			M10	50
			M10	60
			M10	70
			M10	80
			M10	100
			M10	120
			M10	130
			M12	40
			M12	50
			M12	60
			M12	70
			M12	80
			M12	100
			M12	120
			M12	130
			M12	140
			M12	150
			M12	160
			M12	170
			M12	180
			M12*	200*
			M12*	220*
			M12*	240*
			M12*	260*
			M12*	280*
			M12*	300*
			M12*	400*

This table continues on next page.

CUP HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
METRIC (mm)			M16	70
			M16	100
			M16	120
			M16	140
			M16	300
			M16	350

*Not commonly available sizes.



BUMAX[®]

THE WORLD'S STRONGEST STAINLESS STEEL BOLT


- » Bumax[®] 88 tensile strength equivalent to Class 8.8.
- » Bumax[®] 109 tensile strength equivalent to Class 10.9.
- » Unmatched corrosion resistance.
- » Guaranteed traceability. Test certificates online.
- » Low and High Temperature Applications (-200°C to +400°C).



NEPTUNE[®]

HIGH-TENSILE STAINLESS A4-80


- » Guaranteed traceability.
- » High mechanical strength.
- » All of the Neptune range is to DIN standards.

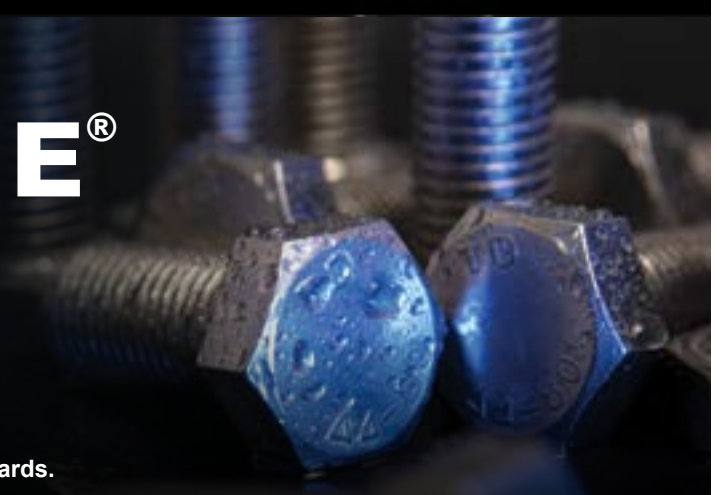

STAINLESS FASTENERS

HIGH QUALITY STAINLESS

- » Wide range of products.
- » Imperial range UNC UNF is to ANSI standards.
- » Metric range is manufactured to DIN and ISO standards.

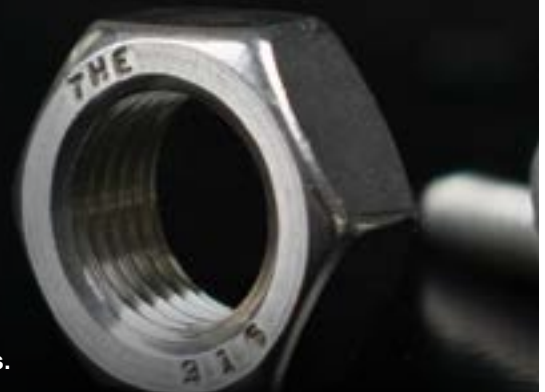

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



2206501

HEX HEAD BOLTS

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
IFI 136C										
UNC (inch)	1/4	1-1/4	1/4	1-1/4			5/16	4		
	1/4	1-1/2	1/4	1-1/2			3/8	1-1/4		
	1/4	1-3/4	1/4	1-3/4			3/8	1-1/2		
	1/4	2	1/4	2			3/8	5-1/2		
	1/4	2-1/4	1/4	2-1/4			3/4	3		
	1/4	2-1/2	1/4	2-1/2						
	1/4	2-3/4	1/4	3						
	1/4	3	1/4	3-1/2						
	1/4	3-1/2	1/4	4						
	1/4	4	1/4	4-1/2						
	1/4	4-1/2	1/4	5						
	1/4	5	1/4	6						
	1/4	5-1/2	5/16	1-1/2						
	1/4	6	5/16	1-3/4						
	5/16	1-1/2	5/16	2						
	5/16	1-3/4	5/16	2-1/4						
	5/16	2	5/16	2-1/2						
	5/16	2-1/4	5/16	2-3/4						
	5/16	2-1/2	5/16	3						
	5/16	2-3/4	5/16	3-1/2						
	5/16	3	5/16	4						
	5/16	3-1/2	5/16	4-1/2						
	5/16	4	5/16	5						
	5/16	4-1/2	5/16	5-1/2						
	5/16	5	5/16	6						
	5/16	5-1/2	3/8	1-1/2						
	5/16	6	3/8	1-3/4						
	3/8	1-1/2	3/8	2						
	3/8	1-3/4	3/8	2-1/4						
	3/8	2	3/8	2-1/2						
	3/8	2-1/4	3/8	2-3/4						
	3/8	2-1/2	3/8	3						
	3/8	2-3/4	3/8	3-1/2						
	3/8	3	3/8	4						
	3/8	3-1/2	3/8	4-1/2						
	3/8	4	3/8	5						
	3/8	5	3/8	5-1/2						
	3/8	5-1/2	3/8	6						
	3/8	6	3/8	7						
	1/2	2	3/8	8						
	1/2	2-1/2	7/16	1-3/4						
	1/2	3	7/16	2						
	1/2	3-1/2	7/16	2-1/2						
	1/2	4	7/16	3						
	1/2	4-1/2	1/2	2						
	1/2	5	1/2	2-1/4						
	1/2	6	1/2	2-1/2						
	5/8	2	1/2	2-3/4						
	5/8	2-1/4	1/2	3						

This table continues on next page.

HEX HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE				
	304 (A2)	316 (A4)	316 (A4-80)	HT 88	HT 109
IFI 136C					
UNC (inch)	5/8	2-1/2	1/2	3	
	5/8	2-3/4	1/2	3-1/4	
	5/8	3	1/2	3-1/2	
	5/8	3-1/2	1/2	4	
	5/8	4	1/2	4-1/2	
	5/8	4-1/2	1/2	5	
	5/8	5	1/2	5-1/2	
	5/8	5-1/2	1/2	6	
	5/8	6	1/2	6-1/2	
	3/4	2-1/2	1/2	7	
	3/4	2-3/4	1/2	7-1/2	
	3/4	3	1/2	8	
	3/4	3-1/2	1/2	8-1/2	
	3/4	4	5/8	2	
	3/4	4-1/2	5/8	2-3/4	
	3/4	5	5/8	3	
	3/4	5-1/2	5/8	3-1/2	
	3/4	6	5/8	4	
	3/4	7	5/8	4-1/2	
			5/8	5	
			5/8	5-1/2	
			5/8	6	
			5/8	7	
			5/8	8	
			3/4	2-1/2	
			3/4	2-3/4	
			3/4	3	
			3/4	3-1/2	
			3/4	4	
			3/4	4-1/2	
			3/4	5	
			3/4	5-1/2	
			3/4	6	
			3/4	7	
			7/8	3	
			7/8	3-1/2	
			7/8	4	
			7/8	4-1/2	
			7/8	5	
			7/8	6	
			1	3	
			1	3-1/2	
			1	4	
			1	4-1/2	
			1	5	
			1	6	

This table continues on next page.

HEX HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
IFI 136C										
UNF (inch)	1/4	5/8								
	1/4	3/4								
	1/4	1								
	5/16	3/4								
	5/16	1-1/2								
	5/16	2								
	5/16	2-1/2								
	5/16	3								
	3/8	3/4								
	3/8	1-1/2								
	3/8	2								
	3/8	2-1/2								
	1/2	2								
	1/2	2-1/2								
	1/2	3								
	5/8	3								
BSW			1/2	1-1/2						
			1/2	1-3/4						
			1/2	2-1/2						
			1/2	3						
			1/2	3-1/2						
			1/2	4						
			1/2	4-1/2						
METRIC (mm)	M6	30	M6	30	M6	30	M6	30	M6	30
	M6	35	M6	35	M6	35	M6	35	M6	35
	M6	40	M6	40	M6	40	M6	40	M6	40
	M6	45	M6	45	M6	45	M6	45	M6	45
	M6	50	M6	50	M6	50	M6	50	M6	50
	M6	55	M6	55	M6	55	M6	55	M6	55
	M6	60	M6	60	M6	60	M6	60	M6	60
	M6	65	M6	65	M6	65	M6	65	M6	65
	M6	70	M6	70	M6	70	M6	70	M6	70
	M6	75	M6	75	M6	80	M6	80	M6	75
	M6	80	M6	80	M6	90	M6	90	M6	80
	M6	90	M6	90	M6	100	M6	100	M8	35
	M6	100	M6	100	M6	110	M6	110	M8	40
	M6	130	M6	110	M6	120	M6	120	M8	45
	M6	150	M6	130	M6	130	M6	130	M8	50
	M8	30	M6	140	M8	35	M8	35	M8	55
	M8	35	M6	150	M8	40	M8	40	M8	60
	M8	40	M8	35	M8	45	M8	45	M8	65
	M8	45	M8	40	M8	50	M8	50	M8	70
	M8	50	M8	45	M8	55	M8	55	M8	75
	M8	55	M8	50	M8	60	M8	60	M8	80
	M8	60	M8	55	M8	65	M8	65	M10	45
	M8	65	M8	60	M8	70	M8	70	M10	50
	M8	70	M8	65	M8	75	M8	75	M10	55
	M8	75	M8	70	M8	80	M8	80	M10	60
	M8	80	M8	75	M8	90	M8	90	M10	65

This table continues on next page.

HEX HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
IFI 136C										
METRIC (mm)	M8	90	M8	80	M8	100	M8	100	M10	70
	M8	100	M8	90	M8	110	M8	110	M10	75
	M8	110	M8	100	M8	120	M8	120	M10	80
	M8	120	M8	110	M8	130	M8	130	M10	90
	M8	130	M8	120	M8	140	M8	140	M10	100
	M8	140	M8	130	M8	150	M8	150	M12	45
	M8	150	M8	140	M10	40	M10	40	M12	50
	M10	35	M8	150	M10	45	M10	45	M12	55
	M10	40	M10	40	M10	50	M10	50	M12	60
	M10	45	M10	45	M10	55	M10	55	M12	65
	M10	50	M10	50	M10	60	M10	60	M12	70
	M10	55	M10	55	M10	65	M10	65	M12	75
	M10	60	M10	60	M10	7	M10	70	M12	80
	M10	65	M10	65	M10	75	M10	75	M12	90
	M10	70	M10	70	M10	80	M10	80	M12	100
	M10	75	M10	75	M10	85	M10	85	M12	120
	M10	80	M10	80	M10	90	M10	90	M16	55
	M10	90	M10	90	M10	100	M10	100	M16	60
	M10	100	M10	100	M10	110	M10	110	M16	65
	M10	110	M10	110	M10	120	M10	120	M16	70
	M10	120	M10	120	M10	130	M10	130	M16	75
	M10	130	M10	130	M10	140	M10	140	M16	80
	M10	140	M10	140	M10	150	M10	150	M16	90
	M10	150	M10	150	M10	160	M10	160	M16	100
	M10	160	M10	160	M10	180	M10	180	M16	110
	M10	170	M10	170	M10	200	M10	200	M16	120
	M10	180	M10	180	M12	45	M12	45	M16	150
	M10	200	M10	200	M12	50	M12	50		
	M10	210	M10	220	M12	55	M12	55		
	M10	220	M10	240	M12	60	M12	60		
	M10	230	M10	250	M12	65	M12	65		
	M10	240	M10	260	M12	70	M12	70		
	M10	250	M10	280	M12	75	M12	75		
	M10	260	M10	300	M12	80	M12	80		
	M10	270	M12	40	M12	90	M12	90		
	M10	280	M12	45	M12	100	M12	100		
	M10	290	M12	50	M12	110	M12	110		
	M10	300	M12	55	M12	120	M12	120		
	M12	40	M12	60	M12	130	M12	130		
	M12	45	M12	65	M12	140	M12	140		
	M12	50	M12	70	M12	150	M12	150		
	M12	55	M12	75	M12	160	M12	160		
	M12	60	M12	80	M12	180	M12	180		
	M12	65	M12	90	M12	190	M14	80		
	M12	70	M12	100	M12	200	M14	90		

This table continues on next page.

HEX HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
IFI 136C										
METRIC (mm)	M12	75	M12	110	M14	80	M14	100		
	M12	80	M12	120	M14	90	M14	120		
	M12	90	M12	130	M14	100	M14	140		
	M12	100	M12	140	M14	120	M16	50		
	M12	110	M12	150	M14	140	M16	55		
	M12	120	M12	160	M16	45	M16	60		
	M12	130	M12	170	M16	50	M16	65		
	M12	140	M12	180	M16	55	M16	70		
	M12	150	M12	190	M16	60	M16	75		
	M12	160	M12	200	M16	65	M16	80		
	M12	170	M12	210	M16	70	M16	90		
	M12	180	M12	220	M16	75	M16	100		
	M12	190	M12	240	M16	80	M16	110		
	M12	200	M12	250	M16	90	M16	120		
	M12	210	M12	260	M16	100	M16	130		
	M12	220	M12	280	M16	110	M16	140		
	M12	230	M12	300	M16	120	M16	150		
	M12	240	M12	350	M16	130	M16	160		
	M12	250	M14	50	M16	140	M16	170		
	M12	260	M14	60	M16	150	M16	180		
	M12	270	M14	70	M16	160	M16	200		
	M12	280	M14	75	M16	170				
	M12	290	M14	80	M16	180	M18	90		
	M12	300	M14	90	M16	200	M18	100		
			M14	100	M16	220	M18	120		
	M16	50	M14	120	M18	90	M18	140		
	M16	55	M14	140	M18	100	M18	150		
	M16	60	M14	150	M18	120	M20	70		
	M16	65	M16	50	M18	140	M20	75		
	M16	70	M16	55	M18	150	M20	80		
	M16	75	M16	60	M20	60	M20	90		
	M16	80	M16	65	M20	65	M20	100		
	M16	90	M16	70	M20	70	M20	110		
	M16	100	M16	75	M20	75	M20	120		
	M16	110	M16	80	M20	80	M20	130		
	M16	120	M16	90	M20	90	M20	140		
	M16	130	M16	100	M20	100	M20	150		
	M16	140	M16	110	M20	110	M20	160		
	M16	150	M16	120	M20	120	M20	180		
	M16	160	M16	130	M20	130	M20	200		
	M16	170	M16	140	M20	140	M24	75		
	M16	180	M16	150	M20	150	M24	80		
	M16	190	M16	160	M20	160	M24	90		
	M16	200	M16	170	M20	180	M24	100		
	M16	210	M16	180	M20	190	M24	110		
	M16	220	M16	200	M20	200	M24	120		

This table continues on next page.

HEX HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
IFI 136C										
METRIC (mm)	M16	240	M16	220	M20	220	M24	130		
	M16	250	M16	240	M20	425	M24	140		
	M16	260	M16	250	M20	450	M24	150		
	M16	270	M16	260	M20	500	M24	160		
	M16	280	M16	270	M20	600	M24	180		
	M16	290	M16	280	M20	700	M24	200		
	M16	300	M16	300	M20	800				
			M16	325	M24	75				
			M16	350	M24	80				
			M16	400	M24	90				
			M16	450	M24	100				
			M16	500	M24	110				
			M16	550	M24	120				
			M18	80	M24	130	M27	100		
	M20	60	M18	100	M24	140	M27	110		
	M20	65	M18	120	M24	150	M27	120		
	M20	70	M18	150	M24	160	M27	130		
	M20	75	M20	60	M24	170	M27	140		
	M20	80	M20	65	M24	180	M27	150		
	M20	90	M20	70	M24	200	M27	160		
	M20	100	M20	75	M24	250	M27	180		
	M20	110	M20	80	M27	80	M27	200		
	M20	120	M20	90	M27	100	M27	210		
	M20	130	M20	100	M27	110	M30	80		
	M20	140	M20	110	M27	120	M30	90		
	M20	150	M20	120	M27	130	M30	100		
	M20	160	M20	130	M27	140	M30	110		
	M20	190	M20	140	M27	150	M30	115		
	M20	200	M20	150	M27	160	M30	120		
	M20	375	M20	160	M27	170	M30	130		
	M20	400	M20	170	M27	180	M30	140		
	M20	425	M20	180	M27	200	M30	150		
	M24	80	M20	190	M27	210	M30	160		
	M24	90	M20	200	M27	220	M30	180		
	M24	100	M20	220	M27	240	M30	200		
	M24	110	M20	240	M27	250	M30	235		
	M24	120	M20	250	M27	260	M36	100		
	M24	130	M20	260	M27	280	M36	120		
	M24	140	M20	280	M27	300	M36	140		
	M24	150	M20	300	M30	75	M36	160		
	M24	160	M20	350	M30	80	M36	180		
	M24	170	M20	375	M30	90	M36	200		
	M24	180	M20	400	M30	100	M36	210		
	M24	190	M20	425	M30	110	M36	220		
	M24	200	M20	450	M30	115	M36	240		

This table continues on next page.

HEX HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE				
	304 (A2)	316 (A4)	316 (A4-80)	HT 88	HT 109
IFI 136C					
METRIC (mm)		M20	500	M30	120
		M20	600	M30	130
		M20	700	M30	140
		M20	800	M30	150
		M24	70	M30	160
		M24	75	M30	170
		M24	80	M30	180
		M24	90	M30	180
		M24	100	M30	235
		M24	110	M36	100
		M24	120	M36	120
		M24	130	M36	140
		M24	140	M36	160
		M24	150	M36	180
		M24	160	M36	200
		M24	170	M36	210
		M24	180	M36	220
		M24	190	M36	240
		M24	200		
		M24	210		
		M24	220		
		M24	240		
		M24	250		
		M24	260		
		M24	280		
		M24	300		
		M24	350		
		M24	400		
		M24	500		
		M27	90		
		M27	100		
		M27	110		
		M27	120		
		M27	130		
		M27	140		
		M27	150		
		M27	160		
		M27	170		
		M27	180		
		M27	200		
		M27	220		
		M27	240		
		M27	250		
		M27	260		
		M27	280		
		M27	300		

This table continues on next page.

HEX HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE				
	304 (A2)	316 (A4)	316 (A4-80)	HT 88	HT 109
IFI 136C					
METRIC (mm)		M30	90		
		M30	100		
		M30	110		
		M30	120		
		M30	130		
		M30	140		
		M30	150		
		M30	160		
		M30	170		
		M30	180		
		M30	200		
		M30	220		
		M30	240		
		M30	250		
		M30	260		
		M30	280		
		M30	300		
		M33	100		
		M33	120		
		M33	130		
		M33	140		
		M33	150		
		M33	160		
		M33	170		
		M33	180		
		M33	200		
		M33	220		
		M33	240		
		M33	250		
		M33	260		
		M33	280		
		M36	100		
		M36	110		
		M36	120		
		M36	130		
		M36	140		
		M36	150		
		M36	170		
		M36	180		
		M36	200		
		M36	220		
		M36	240		
		M36	250		
		M36	260		
		M36	280		
		M36	300		
		M36	400		

This table continues on next page.

HEX HEAD BOLTS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
IFI 136C										
METRIC (mm)			M39	400						
			M42	160						
			M42	200						
			M42	250						
			M42	300						
			M42	450						

NUTS

COLLARED LOCK NUT

THREAD SPECIFICATION	GRADE		
	304 (A2)	316 (A4)	HT 88
METRIC (mm)			M12
			M16
			M20

FLANGED LOCK NUT

THREAD SPECIFICATION	GRADE		
	304 (A2)	316 (A4)	HT 88
METRIC (mm)			M6
			M8
			M10
			M12

DOME HEX NUTS

THREAD SPECIFICATION	GRADE		
	304 (A2)	316 (A4)	2507
UNC (inch)	8-32		
	10-24		
	1/4		
	5/16		
	3/8		
	7/16		
	1/2		
	5/8		
UNF (inch)	10-32		
	1/4		
	5/16		
	3/8		
	1/2		
BSW (2PC WELD)	1/2		
DIN 1587			
METRIC	M3		
	M4	M4	
	M5	M5	
	M6	M6	
	M8	M8	
	M10	M10	
	M12	M12	
	M16	M16	
		M20	
		M24	
		M30	
		M36	
METRIC HEC (2PC WELD)	M16		

HEX NUT

THREAD SPECIFICATION	GRADE					
	304 (A2)	316 (A4)	316 (A4-80)	HT 88	HT 109	2507
IFI 145						
UNC (inch)	2-56					
	4-40					
	5-40					
	6-32					
	8-32		8-32			
	10-24		10-24			
	12-24					
	1/4		1/4			
	5/16		5/16			
	3/8		3/8		3/8	
			7/16			
	1/2		1/2		1/2	
			9/16			
			5/8			
			3/4			
			7/8			
			1			
		1-1/8				
		1-1/4				
UNF (inch)	10-32		10-32			
	1/4		1/4			
	5/16		5/16			
	3/8		3/8			
			7/16			
	1/2		1/2			
			5/8			
			3/4			
		7/8				
		1				
BSW BS 1083						
	1/2		3/16			
			1/2			
DIN 934 FINE						
	M10-1.25		M8-1.00			
	M12-1.50		M10-1.0			
	M12-1.25		M20-1.50			
	M16-1.50					
DIN 929 WELDED NUT						
METRIC (mm)	M3					
	M4					
	M5					
	M6					
	M8					
DIN 934 HEX NUT						
	M2		M2			
	M2.5		M2.5			
	M3		M3			
	M4		M4	M4		
	M5		M5*	M5		
	M6		M6*	M6	M6	M6
	M8		M8*	M8	M8	M8

This table continues on next page.


HEX NUT (CONTINUED)

THREAD SPECIFICATION	GRADE					
	304 (A2)	316 (A4)	316 (A4-80)	HT 88	HT 109	2507
DIN 934 HEX NUT						
METRIC (mm)	M10	M10*	M10	M10	M10	
	M12	M12*	M12	M12	M12	
	M14	M14	M14	M14		
	M16	M16*	M16	M16	M16	
		M18	M18	M18		
	M20	M20	M20	M20	M20	
		M22				
	M24	M24	M24	M24	M24	
		M27	M27	M27		
	M30	M30	M30	M30		
		M33	M33	M33		
		M36	M36	M36		
		M39				
		M42				
		M48				
		M56				
		M64				

* Available in left hand thread

NYLOC[®]

Anti-vibration solution



The special nylon insert prevents loosening caused by vibration.

Available in Class 6, 8 and 10 and Stainless A2, A4 and A4-80



Nylon Insert Locknuts

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au

QUALITY FASTENERS SINCE 1935



2407241

LOCKING NUTS

THREAD SPECIFICATION	GRADE			
	304 (A2)	316 (A4)	316 (A4-80)	2507
"HOBLOCH" STYLE				
	M6			
	M8			
	M10			
	M12			
	M16			
	M20			
METRIC FINE	M10-1.25			
	M12-1.25			
	M12-1.50			
BSW	1/2			
NYLOC STYLE				
UNC - HEC - THIN TYPE	1/4			
	5/16			
	3/8			
	1/2			
IFI-100/107				
	4-40			
	5-40			
	6-32			
	8-32			
	10-24	10-24		
	1/4	1/4		
	5/16	5/16		
	3/8	3/8		
		7/16		
	1/2	1/2		
	5/8	5/8		
	3/4	3/4		
		7/8		
	1	1		
UNF HEC	10-32			
	1/4	1/4		
	5/16	5/16		
	3/8	3/8		
		7/16		
		1/2		
		5/8		
		3/4		
		1		
BSW HEC	1/2	1/2		
DIN 985				
METRIC (mm)	M2.5			
	M3	M3		
	M4	M4	M4	
	M5	M5		
	M6	M6	M6	
	M8	M8	M8	
	M10	M10	M10	
	M12	M12	M12	
	M14	M14	M14	
	M16	M16	M16	
		M18	M18	
	M20	M20	M20	
		M24	M24	
		M27		
		M30	M30	
		M36	M36	
		M42		
		M48		

SERRATED FLANGE NUT

THREAD SPECIFICATION	GRADE		
	304 (A2)	316 (A4)	HT 88
IFI 145			
UNC (inch)		3/8	
ISO 4161			
METRIC (mm)		M4	
	M5	M5	
	M6	M6	M6
	M8	M8	
	M10	M10	M10
	M12	M12	M12
			M20

SHEAR NUTS

THREAD SPECIFICATION	GRADE	
	304 (A2)	316 (A4)
METRIC (mm)	M6	
	M8	
	M10	
	M12	

SQUARE NUT

THREAD SPECIFICATION	GRADE
	316 (A4)
METRIC DIN 557	M10
	M12
	M16

THIN HEX LOCK NUT

THREAD SPECIFICATION	GRADE		
	304 (A2)	316 (A4)	HT 88
IFI145			
UNC (inch)		1/4	
	5/16	5/16	
	3/8	3/8	
	1/2	1/2	
		5/8	
		3/4	
		7/8	
		1	
UNF (inch)		1/4	
		5/16	
		3/8	
		1/2	
		5/8	
		3/4	
		1	
METRIC (mm)	M3		
	M4	M4	
	M5	M5	
	M6	M6	
	M8	M8	
	M10	M10	
	M12	M12	
	M16	M14	
	M20	M16	
		M20	
		M24	
		M30	
		M36	
		M42	
		M48	

WING NUTS

THREAD SPECIFICATION	GRADE	
	304 (A2)	316 (A4)
UNC (inch)	10-24	10-24
	1/4	1/4
	5/16	5/16
	3/8	3/8
	1/2	1/2
		5/8
	3/4	
BSW		1/2
METRIC (mm)	M3	M3
	M4	M4
	M5	M5
	M6	M6
	M8	M8
	M10	M10
	M12	M12
	M16	M16

THREADED ROD (3ft, 1m, 2m, 3m LENGTHS)

THREAD SPECIFICATION		GRADE				
		304 (A2)	316 (A4)	316 (A4-80)	HT 88	2507
IFI 136C						
UNC (inch)	1/8		•			
	3/16		•			
	1/4	•	•			
	5/16	•	•			
	3/8	•	•			
	7/16		•			
	1/2	•	•			
	9/16		•			
	5/8	•	•			
	3/4	•	•			
	7/8	•	•			
	1	•	•			
	1-1/8		•			
	1-1/4		•			
UNF (inch)	1/4		•			
	5/16		•			
	3/8		•			
1/2		•				
AS 3501						
BSW (inch)	1/2	•	•			
BSF (inch)	1/4		•			
	5/16		•			
	3/8		•			
DIN 975						
METRIC (mm)	M3		•			
	M4	•	•			
	M5	•	•		•	
	M6	•	•	•	•	
	M8	•	•	•	•	
	M10*	•	•	•	•	
	M12*	•	•	•	•	
	M14		•		•	
	M16	•	•	•	•	
	M18		•		•	
	M20	•	•	•	•	
	M22		•		•	
	M24	•	•	•	•	
	M27		•	•	•	
	M30	•	•	•	•	
	M33		•	•	•	
	M36	•	•	•	•	
	M42		•	•	•	
	M48		•	•	•	
M64		•				
Some 316 metric rods are available in shorter lengths from 50 mm to 300 mm						
AVAILABLE IN METRIC FINE FOR 316 A4						

SCREWS

BUTTON HEAD SOCKET SCREWS

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
IFI 136C				
UNC (inch)	6-32	1/4		
	6-32	3/8		
	6-32	1/2		
	8-32	1/4		
	8-32	3/8		
	8-32	1/2		
	8-32	3/4		
	8-32	1		
	10-24	3/8		
	10-24	1/2		
	10-24	5/8		
	10-24	3/4		
	10-24	1		
	10-24	1-1/4		
	1/4	3/8		
	1/4	1/2		
	1/4	5/8		
	1/4	3/4		
	1/4	1		
	1/4	1-1/4		
	1/4	1-1/2		
	1/4	1-3/4		
	1/4	2		
	5/16	5/8		
5/16	3/4			
5/16	1			
5/16	1-1/4			
5/16	1-1/2			
5/16	2			
3/8	1			
ISO 7380				
METRIC (mm)	M3	4	M3	5
	M3	5	M3	6
	M3	6	M3	8
	M3	8	M3	10
	M3	10	M3	12
	M3	12	M3	16
	M3	16	M3	20
	M3	20	M3	25
	M3	25	M3	30
	M3	30	M4	6
	M3	40	M4	8
	M3	50	M4	10
	M4	4	M4	12
	M4	5	M4	16
	M4	6	M4	20
	M4	8	M4	25
	M4	10	M4	30
	M4	12	M4	35
	M4	16	M4	40

This table continues on next page.

BUTTON HEAD SOCKET SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
ISO 7380				
METRIC (mm)	M4	20	M5	8
	M4	25	M5	10
	M4	30	M5	12
	M4	35	M5	16
	M4	40	M5	20
	M4	45	M5	25
	M4	50	M5	30
	M5	6	M5	35
	M5	8	M5	40
	M5	10	M5	45
	M5	12	M5	50
	M5	16	M5	60
	M5	20	M6	8
	M5	25	M6	10
	M5	30	M6	12
	M5	35	M6	16
	M5	40	M6	20
	M5	45	M6	25
	M5	50	M6	30
	M5	55	M6	35
	M5	60	M6	40
	M6	8	M6	50
	M6	10	M6	60
	M6	12	M8	10
	M6	16	M8	12
	M6	20	M8	16
	M6	25	M8	20
	M6	30	M8	25
	M6	35	M8	30
	M6	40	M8	35
	M6	45	M8	40
	M6	50	M8	50
	M6	55	M8	60
	M6	60	M10	16
	M6	80	M10	20
	M8	10	M10	25
	M8	12	M10	30
	M8	16	M10	35
	M8	20	M10	40
	M8	25	M10	50
	M8	30	M10	60
	M8		M10	80
	M8	35	M12	20
	M8	40	M12	25
	M8	45	M12	30
	M8	50	M12	35
	M8	55	M12	40
	M8	60	M12	50
	M8	70	M12	60
	M8	80		

This table continues on next page.

BUTTON HEAD SOCKET SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
ISO 7380				
METRIC (mm)	M8	90		
	M8	100		
	M10	16		
	M10	20		
	M10	25		
	M10	30		
	M10	35		
	M10	40		
	M10	45		
	M10	50		
	M10	55		
	M10	60		
	M10	70		
	M10	80		
	M10	90		
	M10	100		
	M12	16		
	M12	20		
	M12	25		
	M12	30		
	M12	35		
	M12	40		
	M12	50		
	M12	60		
	M12	70		
	M12	80		
	M12	90		
	M12	100		

CHEESE HEAD SCREW

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
SLOT HEAD STYLE				
METRIC (mm)	M3	6	M3	6
	M3	8	M3	8
	M3	10	M3	10
	M3	12	M3	12
	M3	16	M3	16
	M3	20	M3	20
	M3	25	M3	25
	M3	30	M3	35
	M3	40	M4	6
	M3	50	M4	8
	M4	6	M4	10
	M4	8	M4	12
	M4	10	M4	16
	M4	12	M4	20
	M4	16	M4	25
	M4	20	M4	30
	M4	25	M4	40
	M4	30	M4	50
	M4	40	M5	10
	M4	50	M5	12
	M5	6	M5	16
	M5	8	M5	20
	M5	10	M5	25
	M5	12	M5	30
	M5	16	M5	40
	M5	20	M5	50
	M5	25	M5	60
	M5	30	M5	70
	M5	35	M6	10
	M5	40	M6	12
	M5	50	M6	16
	M5	60	M6	20
	M5	70	M6	25
	M6	10	M6	30
	M6	12	M6	35
	M6	16	M6	40
	M6	20	M6	50
	M6	25	M6	60
	M6	30	M6	70
	M6	35		
	M6	40		
	M6	50		
	M6	60		
	M6	70		

COUNTERSUNK FLAT SOCKET SCREW

THREAD SPECIFICATION	GRADE					
	304 (A2)		316 (A4)		HT 88	
IFI 136C						
UNC (inch)	4-40	1/4				
	4-40	3/8				
	6-32	3/8				
	6-32	1/2				
	8-32	3/4				
	10-24	3/8				
	10-24	1/2				
	10-24	5/8				
	10-24	3/4				
	10-24	1				
	1/4	3/8				
	1/4	1/2				
	1/4	5/8				
	1/4	3/4				
	1/4	1				
	1/4	1-1/4				
	1/4	1-1/2				
	1/4	2				
	3/8	2-3/4				
METRIC (mm)			M2	4		
			M2	5		
			M2	6		
			M2	8		
			M2	10		
			M2	12		
			M2	16		
			M2	20		
			M2.5	4		
			M2.5	5		
			M2.5	6		
			M2.5	8		
			M2.5	10		
			M2.5	12		
			M2.5	16		
			M2.5	20		
			M3	4		
			M3	5		
	M3	5	M3	6	M3	6
	M3	6	M3	8	M3	8
	M3	8	M3	10	M3	10
	M3	10	M3	12	M3	12
	M3	12	M3	16	M3	16
	M3	16	M3	20	M3	20
	M3	20	M3	25	M4	8
	M3	25	M3	30	M4	10
			M3	35		
	M3	30	M3	40	M4	12
			M3	50		
	M3	35	M4	6		
	M3	40	M4	8	M4	16

This table continues on next page.

COUNTERSUNK FLAT SOCKET SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE					
	304 (A2)		316 (A4)		HT 88	
IFI 136C						
	M3	45	M4	10	M4	20
	M3	50	M4	12	M4	25
	M4	6	M4	16	M4	30
	M4	8	M4	20		
	M4	10	M4	25	M5	10
	M4	12	M4	30	M5	12
	M4	16	M4	35	M5	16
	M4	20	M4	40	M5	20
	M4	25	M4	45	M5	25
	M4	30	M4	50	M5	30
			M4	60		
			M4	70		
			M4	80		
	M4	35	M5	8		
	M4	40	M5	10	M6	10
	M4	45	M5	12	M6	12
	M4	50	M5	16	M6	16
	M4	60	M5	20	M6	20
	M5	6	M5	25	M6	25
	M5	8	M5	30	M6	30
	M5	10	M5	35	M6	40
	M5	12	M5	40	M6	50
METRIC (mm)	M5	16	M5	45	M6	60
					M8	10
	M5	20	M5	50		
	M5	25	M5	60		
	M5	30	M6	8	M8	16
	M5	35	M6	10	M8	20
	M5	40	M6	12	M8	25
	M5	45	M6	16	M8	30
	M5	50	M6	20	M8	35
	M5	60	M6	25	M8	40
					M8	45
	M5	80	M6	30	M8	50
					M8	55
	M6	8	M6	35	M8	60
	M6	10	M6	40	M8	70
	M6	12	M6	50	M10	20
	M6	16	M6	60	M10	25
	M6	20	M6	70	M10	30
	M6	25	M6	80	M10	35
	M6	30	M8	16	M10	40
	M6	35	M8	20	M10	45
	M6	40	M8	25	M10	50

This table continues on next page.

COUNTERSUNK FLAT SOCKET SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE					
	304 (A2)		316 (A4)		HT 88	
IFI 136C						
	M6	45	M8	30	M12	30
	M6	50	M8	35	M12	35
	M6	60	M8	40	M12	40
	M6	70	M8	45	M12	45
	M6	80	M8	50	M12	50
	M6	90	M8	55	M12	55
	M6	100	M8	60	M12	60
	M8	12	M8	70	M12	70
	M8	16	M8	75		
	M8	20	M8	80		
	M8	25	M8	90		
	M8	30	M8	100	M16	40
	M8	35	M10	16	M16	50
	M8	40	M10	20	M16	60
	M8	45	M10	25	M16	70
	M8	50	M10	30	M16	80
	M8	55	M10	35	M16	100
	M8	60	M10	40		
	M8	70	M10	45		
	M8	75	M10	50		
	M8	80	M10	60		
	M8	90	M10	70		
	M8	100	M10	80		
	M8	120	M10	90		
	M10	12	M10	100		
			M12	20		
	M10	20	M12	25		
	M10	25	M12	30		
	M10	30	M12	35		
	M10	35	M12	40		
	M10	40	M12	45		
	M10	45	M12	50		

This table continues on next page.

COUNTERSUNK FLAT SOCKET SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE				
	304 (A2)		316 (A4)		HT 88
IFI 136C					
METRIC (mm)	M10	50	M12	60	
	M10	60	M12	80	
	M10	70	M12	90	
	M10	80	M12	100	
	M10	90	M14	40	
	M10	100	M16	30	
	M10	120	M16	35	
	M10	130	M16	40	
	M10	150	M16	45	
			M16	50	
	M12	25	M16	60	
	M12	30	M16	70	
	M12	35	M16	80	
	M12	40	M16	90	
	M12	45	M16	100	
	M12	50	M16	120	
	M12	60	M20	40	
	M12	65	M20	50	
	M12	70	M20	60	
	M12	80	M20	70	
	M12	90	M20	80	
	M12	100	M20	90	
	M12	120	M20	100	
			M24	120	
	M12	130			
	M12	150			
	M16	25			
	M16	30			
	M16	40			
	M16	50			
	M16	60			
	M16	70			
	M16	80			
	M16	90			
	M16	100			
	M16	120			
	M16	150			
	M20	40			
	M20	50			
	M20	60			
	M20	70			
	M20	80			
	M20	90			
	M20	100			
	M20	120			
	M20	150			

COUNTERSUNK WOOD SCREW

THREAD SPECIFICATION	GRADE	
	304 (A2)	
PHILLIPS HEAD STYLE		
	#6	3/4
	#6	1
	#8	3/4
	#8	1
	#8	1-1/4
	#8	1-1/2
	#10	1-1/2
	#10	1-3/4
	#12	1-1/4
	#12	1-1/2
	#12	2
	#12	2-1/2
	#14	2-1/2
	#14	3

GRUB SOCKET SCREW

THREAD SPECIFICATION	GRADE	
	304 (A2)	316
UNC (inch)	4-40	
	5-40	
	6-32	
	8-32	
	8-32	
	8-32	
	10-24	
	10-24	
	10-24	
	10-24	
	10-24	
	10-24	
	3/16	3/16
	1/4	1/4
	5/16	5/16
	3/8	3/8
	1/2	1/2
	3/16 UNF	
	1/4 UNF	
	5/16 UNF	
	3/8 UNF	
METRIC (mm)	M2	
	M3	
	M4	
	M5	M5
	M6	M6
	M8	M8
	M10	M10
	M12	M12
	M16	M16
	M20	M20

HEX HEAD SCREWS

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
UNC (inch)	8/32	1/2								
	8/32	1								
	8/32	1-1/2								
	1/4	3/8								
	1/4	1/2	1/4	1/2						
	1/4	5/8	1/4	5/8						
	1/4	3/4	1/4	3/4						
	1/4	7/8								
	1/4	1	1/4	1						
	1/4	1-1/4	1/4	1-1/4						
	1/4	1-1/2	1/4	1-1/2						
	1/4	1-3/4	1/4	1-3/4						
	1/4	2	1/4	2						
	1/4	2-1/2	1/4	2-1/2						
	1/4	3	1/4	3						
	1/4	4								
	5/16	1/2	5/16	1/2						
	5/16	5/8	5/16	5/8						
	5/16	3/4	5/16	3/4						
	5/16	1	5/16	1						
	5/16	1-1/4	5/16	1-1/4						
	5/16	1-1/2	5/16	1-1/2						
	5/16	1-3/4	5/16	1-3/4						
	5/16	2								
	5/16	2-1/4								
	5/16	2-1/2	5/16	2-1/2						
	5/16	3	5/16	3						
	5/16	4	5/16	4						
	3/8	1/2	3/8	1/2						
	3/8	5/8								
	3/8	3/4	3/8	3/4						
	3/8	1	3/8	1						
	3/8	1-1/4	3/8	1-1/4						
	3/8	1-1/2	3/8	1-1/2						
	3/8	1-3/4	3/8	1-3/4						
	3/8	2	3/8	2						
	3/8	2-1/4								
	3/8	2-1/2	3/8	2-1/2						
	3/8	3	3/8	3						
	3/8	3-1/2								
	3/8	4	3/8	4						

This table continues on next page.

HEX HEAD SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
UNC (inch)	7/16	1-1/2	1/2	3/4						
	1/2	1	1/2	1						
	1/2	1-1/4	1/2	1-1/4						
	1/2	1-1/2	1/2	1-1/2						
	1/2	1-3/4	1/2	1-3/4						
	1/2	2	1/2	2						
	1/2	2-1/2	1/2	2-1/2						
	1/2	3	1/2	3						
	1/2	3-1/2								
	1/2	4								
	5/8	1	5/8	1						
	5/8	1-1/4	5/8	1-1/4						
	5/8	1-1/2	5/8	1-1/2						
	5/8	1-3/4	5/8	1-3/4						
	5/8	2	5/8	2						
	5/8	2-1/4								
	5/8	2-1/2	5/8	2-1/2						
	5/8	3	5/8	3						
	5/8	3-1/2	5/8	3-1/2						
	5/8	4	5/8	4						
	3/4	1-1/4	3/4	1-1/4						
	3/4	1-1/2	3/4	1-1/2						
	3/4	1-3/4	3/4	1-3/4						
	3/4	2	3/4	2						
	3/4	2-1/4	3/4	2-1/4						
	3/4	2-1/2	3/4	2-1/2						
	3/4	3	3/4	3						
	3/4	3-1/2	3/4	3-1/2						
	3/4	4	3/4	4						
			7/8	2						
			7/8	2-1/2						
			7/8	3						
			1	2						
			1	2-1/2						
			1	3						
			1	3-1/2						
			1	4						
			1	5						
			1	6						
UNF (inch)	10/32	1/2								
	10/32	5/8								
	10/32	3/4								
	10/32	1								
	10/32	1-1/4								
	10/32	1-1/2								
	10/32	2								

This table continues on next page.

HEX HEAD SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
UNF (inch)	1/4	1/2								
	1/4	5/8								
	1/4	3/4								
	1/4	1								
	5/16	5/8								
	5/16	3/4								
	5/16	1								
	5/16	1-1/4								
	3/8	3/4								
	3/8	1								
	3/8	1-1/4								
	7/16	1								
	7/16	1-1/4								
	7/16	1-1/2								
	1/2	1								
	1/2	1-1/4								
	1/2	1-1/2								
	5/8	1-1/4								
	5/8	1-1/2								
	5/8	2								
BSW										
	3/16	3/8								
	3/16	1/2	3/16	1/2						
	3/16	5/8	3/16	5/8						
	3/16	3/4	3/16	3/4						
	3/16	1	3/16	1						
	3/16	1-1/4	3/16	1-1/4						
	3/16	1-1/2	3/16	1-1/2						
	3/16	2								
			3/16	3						
			1/2	3/4						
			1/2	1						
			1/2	1-1/4						
	1/2	1-1/2	1/2	1-1/2						
			1/2	2						
			1/2	2-1/2						
			1/2	3						
			1/2	3-1/2						
DIN 933										
METRIC (mm)	M3	6	M4	8	M4	6	M4	6	M6	12
	M3	8	M4	10	M4	8	M4	8	M6	14
	M3	10	M4	12	M4	10	M4	10	M6	16

This table continues on next page.

HEX HEAD SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
DIN 933										
METRIC (mm)	M3	12	M4	16	M4	12	M4	12	M6	20
	M3	16	M4	20	M4	14	M4	14	M6	22
	M3	20	M4	25	M4	16	M4	16	M6	25
			M4	30						
			M4	40						
			M4	50						
	M3	25	M5	10	M4	20	M4	20	M6	30
	M3	30	M5	12	M4	25	M4	25	M6	35
	M4	6	M5	16	M4	30	M4	30	M8	16
	M4	8	M5	20	M5	10	M5	10	M8	20
	M4	10	M5	25	M5	12	M5	12	M8	22
	M4	12	M5	30	M5	14	M5	14	M8	25
	M4	16	M5	35	M5	16	M5	16	M8	30
	M4	20	M5	40	M5	20	M5	20	M8	35
	M4	25	M5	45	M5	25	M5	25	M8	40
	M4	30	M5	50	M5	30	M5	30	M8	45
	M4	35	M5	60	M5	35	M5	35	M8	50
	M4	40	M6	10	M5	40	M5	40	M8	55
	M4	50	M6	12	M5	45	M5	45	M8	60
	M5	8	M6	16	M5	50	M5	50	M8	65
	M5	10	M6	20	M6	10	M6	10	M8	70
	M5	12	M6	25	M6	12	M6	12	M8	80
	M5	16	M6	30	M6	14	M6	14	M10	20
	M5	20	M6	35	M6	16	M6	16	M10	25
	M5	25	M6	40	M6	18	M6	20	M10	30
	M5	30	M6	45	M6	20	M6	22	M10	35
	M5	35	M6	50	M6	22	M6	25	M10	40
	M5	40	M6	55	M6	25	M6	30	M10	100
	M5	45	M6	60	M6	30	M6	35	M10	110
	M5	50	M6	65	M6	35	M6	40	M10	120
	M5	55	M6	70	M6	40	M6	45	M10	130
	M6	8	M6	75	M6	45	M6	50	M10	140
	M6	10	M6	80	M6	50	M6	60	M10	150
	M6	12	M6	90	M6	60	M6	70	M10	160
	M6	16	M6	100	M6	70	M6	80	M12	20
	M6	20	M8	12	M6	80	M8	10	M12	25
	M6	25	M8	16	M8	10	M8	12	M12	30
	M6	30	M8	20	M8	12	M8	14	M12	35
	M6	35	M8	25	M8	14	M8	16	M12	40
	M6	40	M8	30	M8	16	M8	20	M12	50
	M6	45	M8	35	M8	20	M8	22	M12	90
	M6	50	M8	40	M8	22	M8	25	M12	110
	M6	55	M8	45	M8	25	M8	30	M12	120
	M6	60	M8	50	M8	30	M8	35	M12	130
	M6	65	M8	55	M8	35	M8	40	M12	140
	M6	70	M8	60	M8	40	M8	45	M12	155

This table continues on next page.

HEX HEAD SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
DIN 933										
METRIC (mm)	M6	75	M8	65	M8	45	M8	50	M12	165
	M6	80	M8	70	M8	50	M8	60	M12	175
	M6	90	M8	75	M8	60	M8	70	M14	45
	M6	100	M8	80	M8	70	M8	80	M14	50
	M6	110	M8	90	M8	80	M10	12	M14	60
	M6	120	M8	100	M10	12	M10	16	M16	25
	M6	140	M8	110	M10	16	M10	20	M16	30
	M8	12	M8	120	M10	20	M10	25	M16	35
	M8	16	M8	130	M10	25	M10	30	M16	40
	M8	20	M8	140	M10	30	M10	35	M16	45
	M8	25	M8	150	M10	35	M10	40	M16	50
	M8	30	M10	16	M10	40	M10	45	M16	55
	M8	35	M10	20	M10	45	M10	50	M16	60
	M8	40	M10	25	M10	50	M10	60	M20	40
	M8	45	M10	30	M10	55	M10	70	M20	50
	M8	50	M10	35	M10	60	M10	80	M20	60
	M8	55	M10	40	M10	65	M10	90	M20	70
	M8	60	M10	45	M10	70	M10	100		
	M8	65	M10	50	M10	75	M10	110	M20	80
	M8	70	M10	55	M10	80	M10	120		
	M8	75	M10	60	M10	90	M10	130		
	M8	80	M10	65	M10	100	M12	20		
	M8	90	M10	70	M10	110	M12	25		
	M8	100	M10	75	M10	120	M12	30		
	M8	110	M10	80	M10	130	M12	32		
	M8	120	M10	90	M12	16	M12	35		
	M8	130	M10	100	M12	20	M12	40		
	M8	140	M10	110	M12	25	M12	45		
	M8	150	M10	120	M12	30	M12	50		
	M10	16	M10	130	M12	32				
	M10	20	M10	140	M12	35	M12	60		
	M10	25	M10	150	M12	40	M12	65		
	M10	30	M12	20	M12	45	M12	70		
	M10	35	M12	25	M12	50	M12	80		
	M10	40	M12	30	M12	55	M12	90		
	M10	45	M12	35	M12	60	M12	100		
	M10	50	M12	40	M12	65				
	M10	55	M12	45	M12	70	M14	30		
	M10	60	M12	50	M12	80	M14	40		
	M10	65	M12	55	M12	90	M14	50		
	M10	70	M12	60	M12	100	M14	60		
	M10	75	M12	65	M12	120	M14	70		
	M10	80	M12	70	M14	30	M16	25		

This table continues on next page.

HEX HEAD SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
DIN 933										
METRIC (mm)	M10	90	M12	75	M14	40	M16	30		
	M10	100	M12	80	M14	50	M16	35		
	M10	110	M12	90	M14	60	M16	40		
	M10	120	M12	100	M14	70	M16	45		
	M10	130	M12	110	M16	20	M16	50		
	M10	140	M12	120	M16	25	M16	60		
	M10	150	M12	130	M16	30	M16	70		
	M12	20	M12	140	M16	35	M16	80		
	M12	25	M12	150	M16	40	M16	120		
							M16	130		
	M12	30	M14	30	M16	45				
	M12	35	M14	40	M16	50				
	M12	40	M14	45	M16	60	M18	40		
	M12	45	M14	50	M16	70	M18	50		
	M12	50	M14	60	M16	80	M18	60		
	M12	55	M14	65	M16	120	M18	70		
	M12	60	M14	70	M16	160	M18	80		
	M12	65	M14	80	M16	180	M20	30		
	M12	70	M14	90	M18	40	M20	35		
	M12	75	M14	100	M18	50	M20	40		
	M12	80	M16	25	M18	60	M20	45		
	M12	85	M16	30	M18	70	M20	50		
	M12	90	M16	35	M18	80	M20	55		
	M12	100	M16	40	M20	25	M20	60		
	M12	110	M16	45	M20	30	M20	65		
	M12	120	M16	50	M20	35	M20	70		
	M12	130	M16	55	M20	40	M20	75		
	M12	140	M16	60	M20	45	M20	80		
	M12	150	M16	65	M20	50	M20	100		
	M14	25	M16	70	M20	55				
	M14	35	M16	75	M20	60				
	M14	40	M16	80	M20	65	M20	140		
	M14	55	M16	90	M20	70	M20	150		
	M14	60	M16	100	M20	75	M24	40		
	M14	70	M16	110	M20	80	M24	45		
	M16	25	M16	120	M20	100	M24	50		
	M16	30	M16	130	M20	120	M24	60		
	M16	35	M16	140	M20	130	M24	65		
	M16	40	M16	150	M20	140	M24	70		
	M16	45	M20	40	M20	150	M24	75		
	M16	50	M20	45	M24	20	M24	80		
	M16	55	M20	50	M24	35	M24	90		

This table continues on next page.

HEX HEAD SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
DIN 933										
METRIC (mm)	M16	60	M20	55	M24	40	M24	100		
	M16	65	M20	60	M24	45	M24	110		
	M16	70	M20	65	M24	50	M24	120		
	M16	75	M20	70	M24	55	M24	140		
	M16	80	M20	75	M24	60	M27	50		
	M16	90	M20	80	M24	65	M27	60		
	M16	100	M20	90	M24	70	M27	70		
	M16	110	M20	100	M24	75				
	M16	120	M20	110	M24	80	M27	90		
	M16	130	M20	120	M24	90	M27	100		
	M16	140	M20	130	M24	100	M27	120		
	M16	150	M20	140	M24	110	M27	130		
	M18	40	M20	150	M24	120	M27	140		
	M18	50	M22	50	M24	140	M27	150		
	M18	60	M22	60	M27	50	M27	160		
	M18	70	M22	70	M27	60	M30	35		
	M18	80	M22	75	M27	70	M30	42		
	M18	90	M22	80	M27	80	M30	45		
	M18	100	M24	50	M27	90	M30	55		
	M20	30	M24	60	M27	100	M30	60		
	M20	40	M24	65	M27	120	M30	70		
	M20	45	M24	70	M27	130	M30	80		
	M20	50	M24	80	M27	140	M30	90		
	M20	55	M24	90	M27	150	M30	100		
	M20	60	M24	100	M27	160				
	M20	65	M27	60	M30	35				
	M20	70	M27	80	M30	42	M36	80		
			M27	110						
	M20	75	M30	90	M30	45	M36	90		
	M20	80			M30	55	M36	100		
	M20	90			M30	60	M36	120		
	M20	100			M30	65	M36	130		
	M20	110			M30	70	M36	140		
	M20	120			M30	80	M36	150		
	M20	130			M30	85	M36	160		
	M20	140			M30	90	M36	200		
	M20	150			M30	100				
	M24	50			M30	130				
	M24	55			M30	140				
	M24	60			M36	60				
	M24	65			M36	70				
	M24	70			M36	80				
	M24	80			M36	90				
	M24	90			M36	100				
	M24	100			M36	120				
					M36	130				
					M36	140				
					M36	150				
					M36	160				
					M36	200				

METRIC SECURITY SCREWS

THREAD SPECIFICATION	GRADE	
	304 (A2)	
BUTTON HEAD STYLE		
POST TORX		
METRIC (mm)	M3	6
	M3	8
	M3	10
	M3	12
	M3	16
	M3	20
	M4	6
	M4	8
	M4	10
	M4	12
	M4	16
	M4	20
	M4	25
	M4	30
	M5	10
	M5	12
	M5	16
	M5	20
	M5	25
	M5	30
	M5	40
	M5	50
	M5	60
	M6	10
	M6	12
	M6	16
	M6	20
	M6	25
	M6	30
	M6	35
	M6	40
	M6	45
	M6	50
	M8	16
	M8	20
	M8	25
	M8	30
	M8	35
	M8	40
	M8	50

THREAD SPECIFICATION	GRADE	
	304 (A2)	
BUTTON HEAD STYLE		
POST TORX		
METRIC (mm)	M8	80
	M10	16
	M10	20
	M10	25
	M10	30
	M10	35
	M10	40
	M10	50
POST HEX		
METRIC (mm)	M4	6
	M4	8
	M4	10
	M4	12
	M4	16
	M4	20
	M4	25
	M4	30
	M5	10
	M5	12
	M5	16
	M5	20
	M5	25
	M5	30
	M5	35
	M5	40
	M5	45
	M5	50
	M6	10
	M6	12
	M6	16
	M6	20
	M6	25
	M6	30
	M6	35
	M6	40
	M6	45
	M6	50
	M8	16
	M8	20
	M8	25
	M8	30
	M8	35
	M8	40
	M8	50
	M8	60

This table continues on next page.

METRIC SECURITY SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE	
	304 (A2)	
COUNTERSUNK HEAD STYLE		
EYE DRIVE		
METRIC (mm)	M4	10
	M4	12
	M4	16
	M4	20
	M4	25
	M5	12
	M5	16
	M5	20
	M5	25
	M5	30
	M6	12
	M6	20
	M6	25
	M6	30
	M6	40
POST HEX		
METRIC (mm)	M4	8
	M4	10
	M4	12
	M4	16
	M4	20
	M4	25
	M5	10
	M5	12
	M5	16
	M5	20
	M5	25
	M5	30
	M6	10
	M6	12
	M6	16
	M6	20
	M6	25
	M6	30
	M6	40
	M6	45
	M6	50
	M8	16
	M8	20
	M8	25
	M8	30
	M8	40
POST TORX		
METRIC (mm)	M3	6
	M3	8

THREAD SPECIFICATION	GRADE	
	304 (A2)	
POST TORX		
METRIC (mm)	M3	10
	M3	12
	M3	16
	M3	20
	M4	6
	M4	8
	M4	10
	M4	12
	M4	16
	M4	20
	M4	25
	M4	30
	M4	40
	M4	50
	M4	65
	M4	70
	M5	8
	M5	10
	M5	12
	M5	16
	M5	20
	M5	25
	M5	30
	M5	40
	M5	50
	M5	60
	M6	10
	M6	12
	M6	16
	M6	20
	M6	25
	M6	30
	M6	35
	M6	40
	M6	45
	M6	50
	M6	60
	M8	16
	M8	20
	M8	25
	M8	30
	M8	35
	M8	40
	M8	60
	M8	80

This table continues on next page.

METRIC SECURITY SCREWS (CONTINUED)

THREAD SPECIFICATION	GRADE	
	304 (A2)	
PAN HEAD STYLE		
EYE DRIVE		
METRIC (mm)	M4	10
	M4	12
	M4	16
	M4	20
	M4	25
	M5	12
	M5	16
	M5	20
	M5	25
	M5	30
	M6	12
	M6	16
	M6	20
	M6	25
	M6	30
	M6	40

MUSHROOM HEAD SCREW

THREAD SPECIFICATION	GRADE	
	304 (A2)	316 (A4)
PHILLIPS HEAD STYLE		
BSW		
	3/16	1/2
	3/16	5/8
	3/16	3/4
	3/16	1
	3/16	1-1/4
	3/16	1-1/2
	1/4	1/2
	1/4	3/4
	1/4	1
METRIC (mm)		
	M5	20
	M5	25
	M6	25
	M6	30
	M6	40




DRILLX

Bi-FIX™



Excellent self-drilling properties combined with exceptional corrosion resistance.



Corrosion resistant
304 or 316
Stainless Steel.

High carbon steel heat
treated to give the
ability to self-drill.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au

QUALITY FASTENERS SINCE 1935



2206302 *Colour for illustration purposes only.

PAN HEAD SCREW

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
PHILLIPS HEAD STYLE				
UNC (inch)				
	4-40	3/16		
	4-40	1/4		
	4-40	5/16		
	4-40	3/8		
	4-40	1/2		
	4-40	5/8		
	4-40	3/4		
	4-40	1		
	6-32	1/4		
	6-32	5/16		
	6-32	3/8		
	6-32	1/2		
	6-32	5/8		
	6-32	3/4		
	6-32	1		
	6-32	1-1/4		
	6-32	1-1/2		
	6-32	2		
	8-32	1/4		
	8-32	3/8		
	8-32	1/2		
	8-32	5/8		
	8-32	3/4		
	8-32	1		
	8-32	1-1/4		
	8-32	1-1/2		
	8-32	1-3/4		
	8-32	2		
UNF (inch)	10-32	3/8		
	10-32	1/2		
	10-32	3/4		
	10-32	1		
	10-32	1-1/4		
	10-32	1-1/2		
	10-32	2		
BSW	1/8	1/2		
	1/8	3/4		
	1/8	1		
	3/16	1/4	3/16	1/2
	3/16	3/8	3/16	3/4
	3/16	1/2	3/16	1
	3/16	5/8	3/16	1-1/4

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
BSW	3/16	3/4	3/16	1-1/2
	3/16	1	3/16	2
	3/16	1-1/4	3/16	2-1/2
	3/16	1-1/2	3/16	3
	3/16	2	1/4	3/4
	3/16	2-1/2	1/4	1
	3/16	3	1/4	1-1/4
	1/4	3/8	1/4	1-1/2
	1/4	1/2	1/4	2
	1/4	5/8	1/4	3
	1/4	3/4		
	1/4	1		
	1/4	1-1/4		
	1/4	1-1/2		
	1/4	2		
	1/4	2-1/2		
	1/4	3		
	1/4	3-1/2		
	1/4	4		
	5/16	3/4		
	5/16	1		
	5/16	1-1/2		
	5/16	1-3/4		
	5/16	2		
	5/16	2-1/2		
	5/16	3		
METRIC (mm)	M2.5	5		
	M2.5	6		
	M2.5	8		
	M2.5	10		
	M2.5	12	M2.5	12
	M2.5	16		
	M2.5	20		
	M2.5	25		
	M3	6	M3	6
	M3	8	M3	8
	M3	10	M3	10
	M3	12	M3	12
	M3	16	M3	16
	M3	20	M3	20
	M3	25	M3	25
	M3	30	M4	6
	M3	35	M4	8

This table continues on next page.

PAN HEAD SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
METRIC (mm)	M3	40	M4	10
	M3	50	M4	12
	M4	6	M4	16
	M4	8	M4	20
	M4	10	M4	25
	M4	12	M4	30
	M4	16	M4	50
	M4	20	M5	10
	M4	25	M5	12
	M4	30	M5	16
	M4	35	M5	20
	M4	40	M5	25
	M4	50	M5	30
	M5	8	M5	40
	M5	10	M5	50
	M5	12	M6	12
	M5	16	M6	16
	M5	20	M6	20
	M5	25	M6	25
	M5	30	M6	30
	M5	35	M6	40
	M5	40	M6	50
	M5	50		
	M5	65		
	M5	75		
	M6	8		
	M6	10		
	M6	12		
	M6	16		
	M6	20		
	M6	25		
	M6	30		
	M6	35		
	M6	40		
	M6	50		
	M6	60		
	M6	65		
	M6	75		
	M8	20		
	M8	25		
	M8	30		
	M8	40		
	M8	50		

PHILLIPS/SLOT HEAD COUNTERSUNK SCREW

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
PHILLIPS HEAD STYLE				
UNC (inch)				
	2-56	1/4		
	2-56	3/8		
	2-56	1/2		
	4-40	1/4		
	4-40	5/16		
	4-40	3/8		
	4-40	1/2		
	4-40	5/8		
	4-40	3/4		
	4-40	1		
	6-32	1/4		
	6-32	5/16		
	6-32	3/8		
	6-32	1/2		
	6-32	5/8		
	6-32	3/4		
	6-32	1		
	6-32	1-1/4		
	6-32	1-1/2		
	6-32	2		
	8-32	1/4		
	8-32	3/8		
	8-32	1/2		
	8-32	5/8		
	8-32	3/4		
	8-32	1		
	8-32	1-1/4		
	8-32	1-1/2		
	8-32	2		
	12-24	1/2		
UNF (inch)	10-32	3/8		
	10-32	1/2		
	10-32	5/8		
	10-32	3/4		
	10-32	1		
	10-32	1-1/4		
	10-32	1-1/2		
	10-32	2		
	1/8	1/4	3/16	3/8
BSW	5/32	1/4	3/16	1/2
	5/32	3/8	3/16	3/4
	5/32	1/2	3/16	1

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
PHILLIPS HEAD STYLE				
UNC (inch)				
BSW	5/32	1	3/16	1-1/4
	3/16	1/4	3/16	1-1/2
	3/16	3/8	3/16	2
	3/16	1/2	3/16	2-1/2
	3/16	5/8	3/16	3
	3/16	3/4	1/4	3/4
	3/16	1	1/4	1
	3/16	1-1/4	1/4	1-1/4
	3/16	1-1/2	1/4	1-1/2
	3/16	1-3/4	1/4	2
	3/16	2		
	3/16	2-1/2		
	3/16	3		
	1/4	1/2		
	1/4	5/8	M2	5
	1/4	3/4	M2	6
	1/4	1	M2	8
	1/4	1-1/4	M2	10
	1/4	1-1/2	M2	12
	1/4	1-3/4	M2	16
	1/4	2	M2	20
	1/4	2-1/2	M2.5	4
	1/4	3	M2.5	5
	1/4	4	M2.5	6
	5/16	3/4	M2.5	8
	5/16	1	M2.5	10
	5/16	1-1/4	M2.5	12
	5/16	1-1/2	M2.5	16
	5/16	2	M2.5	20
	5/16	2-1/2	M3	6
	5/16	3	M3	8
			M3	10
METRIC (mm)	M2.5	5	M3	12
	M2.5	6	M3	16
	M2.5	8	M3	20
	M2.5	10	M3	25
	M2.5	12	M4	8
	M2.5	16	M4	10
	M2.5	20	M4	12
	M3	5	M4	16
	M3	6	M4	20
	M3	8	M4	25
	M3	10	M4	30

This table continues on next page.

PHILLIPS/SLOT HEAD COUNTERSUNK SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
PHILLIPS HEAD STYLE				
METRIC (mm)	M3	12	M4	40
	M3	16	M5	10
	M3	20	M5	12
	M3	25	M5	16
	M3	30	M5	20
	M3	40	M5	25
	M3	50	M5	30
	M4	6	M5	40
	M4	8	M5	50
	M4	10	M6	12
	M4	12	M6	16
	M4	16	M6	20
	M4	20	M6	25
	M4	25	M6	30
	M4	30	M6	35
	M4	35	M6	40
	M4	40	M6	50
	M4	50	M8	16
	M5	8	M8	20
	M5	10	M8	25
	M5	12	M8	30
	M5	16	M8	40
	M5	20	M8	50
	M5	25	M8	60
	M5	30	M10	25
	M5	35	M10	30
	M5	40		
	M5	50		
	M5	65		
	M5	75		
	M6	10		
	M6	12		
	M6	16		
	M6	20		
	M6	25		
	M6	30		
	M6	35		
	M6	40		
	M6	45		
	M6	50		
	M6	60		
	M6	65		
	M6	75		

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
PHILLIPS HEAD STYLE				
METRIC (mm)	M8	16		
	M8	20		
	M8	25		
	M8	30		
	M8	40		
	M8	50		
SLOT HEAD STYLE				
METRIC (mm)	M3	8	M3	8
	M3	10	M3	10
	M3	12	M3	12
	M3	16	M3	16
	M3	20	M3	20
	M3	25	M3	25
	M3	30	M4	8
	M3	40	M4	10
	M4	8	M4	12
	M4	10	M4	16
	M4	12	M4	20
	M4	16	M4	25
	M4	20	M4	30
	M4	25	M4	40
	M4	30	M4	50
	M4	40	M5	10
	M4	50	M5	12
	M5	10	M5	16
	M5	12	M5	20
	M5	16	M5	25
	M5	20	M5	30
	M5	25	M5	40
	M5	30	M5	45
	M5	35	M5	50
	M5	40	M5	60
	M5	45	M5	65
	M5	50	M5	70
	M5	60	M6	10
	M5	65	M6	12
	M5	70	M6	16
	M6	10	M6	20
	M6	12	M6	25
	M6	16	M6	30
	M6	20	M6	35
	M6	25	M6	40
SLOT HEAD STYLE				
METRIC (mm)				
	M6	30	M6	45
	M6	35	M6	50
	M6	40	M6	60
	M6	45	M6	65
	M6	50	M6	70
	M6	60		
	M6	65		
	M6	70		

ROUND HEAD SCREW

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
SLOT HEAD STYLE				
BSW				
	1/8	1/4	-	-
	1/8	3/8	-	-
	1/8	1/2		
	1/8	5/8		
	1/8	3/4		
	1/8	1		
	1/8	1-1/4		
	1/8	1-1/2		
	1/8	2		
	5/32	1/4		
	5/32	3/8		
	5/32	1/2		
	5/32	5/8		
	5/32	3/4		
	5/32	1		
	5/32	1-1/4		
	5/32	1-1/2		
	5/32	2		
	3/16	1/4	3/16	1/4
	3/16	3/8	3/16	3/8
	3/16	1/2	3/16	1/2
	3/16	5/8	3/16	5/8
	3/16	3/4	3/16	3/4
	3/16	1	3/16	1
	3/16	1-1/4	3/16	1-1/4
	3/16	1-1/2	3/16	1-3/4
	3/16	1-3/4	3/16	2
	3/16	2	3/16	2-1/2
	3/16	2-1/2	3/16	3
	3/16	3	1/4	1/2
	1/4	3/8	1/4	5/8
	1/4	1/2	1/4	3/4
	1/4	5/8	1/4	1
	1/4	3/4	1/4	1-1/4
	1/4	1	1/4	1-1/2
	1/4	1-1/4	1/4	2
	1/4	1-1/2	1/4	2-1/2
	1/4	1-3/4	1/4	3
	1/4	2		
	1/4	2-1/4		
	1/4	2-1/2		
	1/4	3		

SELF TAPPING COUNTERSUNK SCREW

THREAD SPECIFICATION	GRADE				
	304 (A2)		316 (A4)		410
PHILLIPS HEAD STYLE					
ANSI B18.6.4					
	#4	3/8	#4	1/4	
	#4	1/2	#4	3/8	
	#4	5/8	#4	1/2	
	#4	3/4	#4	5/8	
	#4	1	#4	3/4	
	#6	1/2	#4	1	
	#6	5/8	#6	1/2	
	#6	3/4	#6	5/8	
	#6	1	#6	3/4	
	#6	1-1/4	#6	1	
	#6	1-1/2	#6	1-1/4	
	#6	1-3/4	#6	1-1/2	
	#6	2	#8	3/8	
	#8	3/8	#8	1/2	
	#8	1/2	#8	5/8	
	#8	5/8	#8	3/4	
	#8	3/4	#8	1	
	#8	1	#8	1-1/4	
	#8	1-1/4	#8	1-1/2	
	#8	1-1/2	#8	1-3/4	
	#8	1-3/4	#8	2	
	#8	2	#10	1/2	
	#8	2-1/2	#10	5/8	
	#8	3	#10	3/4	
	#10	3/8	#10	1	
	#10	1/2	#10	1-1/4	
	#10	5/8	#10	1-1/2	
	#10	3/4	#10	2	
	#10	1	#10	2-1/2	
	#10	1-1/4	#12	3/4	
	#10	1-1/2	#12	1	
	#10	1-3/4	#12	1-1/4	
	#10	2	#12	1-1/2	
	#10	2-1/2	#12	1-3/4	
	#10	3	#12	2	
	#12	1/2	#12	2-1/2	
	#12	5/8	#14	1	
	#12	3/4	#14	1-1/4	
	#12	1	#14	1-1/2	
	#12	1-1/4	#14	2	
	#12	1-1/2			
	#12	1-3/4			
	#12	2			

This table continues on next page.

SELF TAPPING COUNTERSUNK SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE				
	304 (A2)	316 (A4)	410		
PHILLIPS HEAD STYLE					
ANSI B18.6.4					
	#12	2-1/2			
	#12	3			
	#14	3/4			
	#14	1			
	#14	1-1/4			
	#14	1-1/2			
	#14	1-3/4			
	#14	2			
	#14	2-1/2			
	#14	3			
SQUARE HEAD STYLE					
ANSI B18.6.4					
	#4	5/16			
	#4	3/8			
	#4	1/2	#4	1/2	
	#4	5/8	#4	5/8	
	#4	3/4	#4	3/4	
	#4	1	#4	1	
	#6	3/8			
	#6	1/2	#6	1/2	
	#6	5/8	#6	5/8	
	#6	3/4	#6	3/4	
	#6	1	#6	1	
	#6	1 1/4	#6	1 1/4	
	#6	1 1/2			
	#6	2			
	#8	3/8			
	#8	1/2	#8	1/2	
	#8	5/8	#8	5/8	
	#8	3/4	#8	3/4	
	#8	1	#8	1	
	#8	1 1/4	#8	1 1/4	
	#8	1 1/2	#8	1 1/2	
	#8	1 3/4	#8	1 3/4	
	#8	2	#8	2	
	#8	2 1/2	#8	2 1/2	
	#8	3	#8	3	
	#10	1/2	#10	1/2	
	#10	5/8	#10	5/8	
	#10	3/4	#10	3/4	
	#10	1	#10	1	
	#10	1 1/4	#10	1 1/4	
	#10	1 1/2	#10	1 1/2	
	#10	1 3/4	#10	1 3/4	
	#10	2	#10	1	

This table continues on next page.

SELF TAPPING COUNTERSUNK SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE				
	304 (A2)		316 (A4)		410
SQUARE HEAD STYLE					
ANSI B18.6.4					
	#10	2 1/2	#10	2 1/2	
	#10	3	#10	3	
	#12	3/4	#12	3/4	
	#12	1	#12	1	
	#12	1 1/4	#12	1 1/4	
	#12	1 1/2	#12	1 1/2	
	#12	1 3/4	#12	1 3/4	
	#12	2	#12	2	
	#12	2 1/2	#12	2 1/2	
	#12	3	#12	3	
	#14	3/4			
	#14	1	#14	1	
	#14	1 1/4	#14	1 1/4	
	#14	1 1/2	#14	1 1/2	
	#14	1 3/4	#14	1 3/4	
	#14	2	#14	2	
	#14	2 1/2	#14	2 1/2	
	#14	3	#14	3	
UNDERCUT COUNTERSUNK					
PHILLIPS HEAD STYLE					
ANSI B18.6.4					
	#6-20	3/8			
	#8-18	3/8			
	#8-18	1/2			
	#8-18	5/8			
	#8-18	3/4			
	#10-16	3/8			
	#10-16	1/2		#10-16	1/2
	#10-16	3/4			
	#10-16	1			
	#12-14	1			
	#12-14	1-1/4			
SQUARE HEAD STYLE					
	#8-18	3/8			
	#8-18	1/2			
	#8-18	5/8			
	#8-18	3/4			
	#10-16	1/2			

SELF TAPPING PAN SCREW

THREAD SPECIFICATION	GRADE					
	304 (A2)		316 (A4)		410	
PHILLIPS HEAD STYLE						
ANSI B18.6.4						
	#4	1/4	#4	1/4	#6	3/4
	#4	3/8	#4	3/8	#6	1
	#4	1/2	#4	1/2	#6	1-1/4
	#4	5/8	#4	5/8	#6	1-3/4
	#4	3/4	#4	3/4	#8	1-3/4
	#4	1	#4	1		
	#6	1/4	#6	3/8		
	#6	3/8	#6	1/2		
	#6	1/2	#6	5/8		
	#6	5/8	#6	3/4		
	#6	3/4	#6	1		
	#6	1	#6	1-1/4		
	#6	1-1/2	#6	1-1/2		
	#6	1-3/4	#8	1/4		
	#6	2	#8	3/8		
	#8	1/4	#8	1/2		
	#8	3/8	#8	5/8		
	#8	1/2	#8	3/4		
	#8	5/8	#8	1		
	#8	3/4	#8	1-1/4		
	#8	1	#8	1-1/2		
	#8	1-1/4	#8	2		
	#8	1-1/2	#10	1/2		
PHILLIPS HEAD STYLE						
ANSI B18.6.4						
	#8	1-3/4	#10	5/8		
	#8	2	#10	3/4		
	#8	2-1/2	#10	1		
	#8	3	#10	1-1/4		
	#10	3/8	#10	1-1/2		
	#10	1/2	#10	2		
	#10	5/8	#12	3/4		
	#10	3/4	#12	1		
	#10	1	#12	1-1/4		
	#10	1-1/4	#12	1-1/2		
	#10	1-1/2	#12	2		
	#10	1-3/4	#12	2-1/2		
	#10	2	#14	3/4		
	#10	2-1/2	#14	1		
	#10	3	#14	1-1/2		
	#12	1/2	#14	2		
	#12	5/8	#14	3		
	#12	3/4				
	#12	1				

This table continues on next page.

SELF TAPPING PAN SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE				
	304 (A2)		316 (A4)		410
	#12	1-1/4			
	#12	1-1/2			
	#12	1-3/4			
	#12	2			
	#12	2-1/2			
	#12	3			
	#14	1/2			
	#14	5/8			
	#14	3/4			
	#14	1			
	#14	1-1/4			
	#14	1-1/2			
	#14	1-3/4			
	#14	2			
	#14	2-1/2			
	#14	3			
SQUARE HEAD STYLE					
	#4	3/8			
	#4	1/2	#4	1/2	
	#4	5/8	#4	5/8	
	#4	3/4	#4	3/4	
	#4	1	#4	1	
	#6	3/8			
	#6	1/2	#6	1/2	
	#6	5/8	#6	5/8	
	#6	3/4	#6	3/4	
	#6	1	#6	1	
	#6	1 1/4			
	#6	1 1/2			
	#8	1/2	#8	1/2	
	#8	5/8	#8	5/8	
	#8	3/4	#8	3/4	
	#8	1	#8	1	
	#8	1 1/4	#8	1 1/4	
	#8	1 1/2	#8	1 1/2	
	#8	1 3/4	#8	1 3/4	
	#8	2	#8	2	
	#8	2 1/2			
	#8	3			
	#10	1/2	#10	1/2	
	#10	5/8	#10	5/8	
	#10	3/4	#10	3/4	
	#10	1	#10	1	#10 1
	#10	1 1/4	#10	1 1/4	
	#10	1 1/2	#10	1 1/2	
	#10	1 3/4	#10	1 3/4	
	#10	2	#10	2	

This table continues on next page.

SELF TAPPING PAN SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE				
	304 (A2)		316 (A4)		410
SQUARE HEAD STYLE					
	#10	2 1/2	#10	2 1/2	
	#10	3	#10	3	
	#12	1/2			
	#12	5/8			
	#12	3/4	#12	3/4	
	#12	1	#12	1	
	#12	1 1/4	#12	1 1/4	
	#12	1 1/2	#12	1 1/2	
	#12	1 3/4	#12	1 3/4	
	#12	2	#12	2	
	#12	2 1/2	#12	2 1/2	
	#12	3			
	#14	1/2			
	#14	3/4			
	#14	1			
	#14	1 1/4			
	#14	1 1/2			
	#14	1 3/4			
	#14	2			
	#14	2 1/2			
	#14	3			

SELF TAPPING SECURITY SCREWS

THREAD SPECIFICATION	GRADE	
	304 (A2)	
BUTTON HEAD STYLE		
POST TORX		
	#6	1/2
	#6	3/4
	#6	1
	#6	1-1/2
	#8	1/2
	#8	3/4
	#8	1
	#8	1-1/4
	#10	1/2
	#10	3/4
	#10	1
	#10	1-1/4
	#10	1-1/2
	#14	3/4
	#14	1
	#14	1-1/2
COUNTERSUNK HEAD STYLE		
EYE DRIVE		
	#6	1/2
	#6	5/8
	#6	3/4
	#6	1
	#6	1-1/2
	#8	1/2
	#8	5/8
	#8	3/4
	#8	1
	#8	1-1/2
	#10	1/2
	#10	5/8
	#10	3/4
	#10	1
	#10	1-1/2
	#14	3/4
	#14	1
	#14	1-1/2
POST HEX		
	#8	1/2
	#8	3/4
	#8	1
	#8	1-1/2
	#10	1/2
	#10	3/4
	#10	1
	#10	1-1/2

THREAD SPECIFICATION	GRADE	
	304 (A2)	
POST TORX		
	#6	1/2
	#6	3/4
	#6	1
	#8	1/2
	#8	3/4
	#8	1
	#8	1-1/4
	#10	1/2
	#10	3/4
	#10	1
	#10	1-1/4
	#10	1-1/2
	#14	3/4
	#14	1
	#14	1-1/2
PAN HEAD STYLE		
EYE DRIVE		
	#6	3/8
	#6	1/2
	#6	5/8
	#6	3/4
	#6	1
	#6	1-1/2
	#8	1/2
	#8	5/8
	#8	3/4
	#8	1
	#8	1-1/2
	#10	1/2
	#10	5/8
	#10	3/4
	#10	1
	#10	1-1/2
	#10	2
	#14	1/2
	#14	3/4
	#14	1
	#14	1-1/2
RAISED HEAD STYLE		
ONE WAY		
	#8	1/2
	#8	3/4
	#8	1
	#8	1-1/2
	#10	1/2
	#10	3/4
	#10	1
	#10	1-1/2

SOCKET HEAD CAP SCREW

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
UNC (inch)	2-56	3/16								
	2-56	1/4								
	2-56	3/8								
	4-40	1/4								
	4-40	5/16								
	4-40	3/8								
	4-40	1/2								
	4-40	5/8								
	4-40	3/4								
	4-40	1								
	4-40	1-1/2								
	5-40	1/4								
	5-40	5/16								
	5-40	3/8								
	5-40	1/2								
	5-40	5/8								
	5-40	3/4								
	6-32	3/16								
	6-32	1/4								
	6-32	5/16								
	6-32	3/8								
	6-32	1/2								
	6-32	5/8								
	6-32	3/4								
	6-32	1								
	6-32	1-1/4								
	8-32	1/4								
	8-32	3/8								
	8-32	1/2								
	8-32	5/8								
	8-32	3/4								
	8-32	7/8								
	8-32	1								
	8-32	1-1/2								
	10-24	1/4								
	10-24	3/8								
	10-24	1/2								
	10-24	5/8								
	10-24	3/4								
	10-24	1								
	10-24	1-1/4								
	10-24	1-1/2								
	10-24	2								
	10-24	2-1/2								
	1/4	3/8	1/4	1/2			1/4	5/8		

This table continues on next page.

SOCKET HEAD CAP SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
UNC (inch)	1/4	1/2	1/4	5/8			5/16	7/8		
	1/4	5/8	1/4	3/4			5/16	1-1/2		
	1/4	3/4	1/4	1			3/8	3/4		
	1/4	1	1/4	1-1/4			3/8	1		
	1/4	1-1/4	1/4	1-1/2			3/8	1-1/4		
	1/4	1-1/2	1/4	2			3/8	1-1/2		
	1/4	1-3/4	5/16	3/4			3/8	2-1/2		
	1/4	2	5/16	1			1/2	1		
	1/4	2-1/4	5/16	1-1/4			1/2	1-1/4		
	1/4	2-1/2	5/16	1-1/2			1/2	2		
	1/4	2-3/4								
	1/4	3	5/16	2			5/8	2		
	1/4	3-1/4								
	1/4	3-1/2								
	5/16	1/2	5/16	2-1/2			3/4	2-1/2		
	5/16	3/4	3/8	3/4						
	5/16	1	3/8	1						
	5/16	1-1/4	3/8	1-1/4						
	5/16	1-1/2	3/8	1-1/2						
	5/16	1-3/4	3/8	2						
	5/16	2	3/8	2-1/2						
	5/16	2-1/2	1/2	1						
	5/16	3	1/2	1-1/4						
	3/8	3/4	1/2	1-1/2						
	3/8	1	1/2	2						
	3/8	1-1/4	1/2	2-1/2						
	3/8	1-1/2	1/2	3						
	3/8	1-3/4	1/2	4						
	3/8	2	5/8	1-1/4						
	3/8	2-1/4								
	3/8	2-1/2	5/8	1-1/2						
	3/8	3	5/8	2						
	3/8	3-1/2								
	3/8	4	5/8	2-1/2						
	7/16	1	5/8	3						
	7/16	1-1/2								
	1/2	1								
	1/2	1-1/4								
	1/2	1-1/2								
	1/2	2								
	1/2	2-1/2								
	1/2	3								
METRIC (mm)	M3	5	M1.6	3	M3	6	M3	6	M4	12
	M3	6	M1.6	4	M3	8	M3	8	M4	20
	M3	8	M1.5	5	M3	10	M3	10	M6	20
	M3	10	M1.6	6	M3	12	M3	12	M6	30
	M3	12	M2	4	M3	16	M3	16	M6	40

This table continues on next page.

SOCKET HEAD CAP SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
METRIC (mm)	M3	16	M2	5	M3	20	M3	20	M6	50
	M3	20	M2	6	M3	25	M3	25	M6	60
	M3	25	M2	8	M3	30	M3	30	M6	70
	M3	30	M2	10	M4	6	M4	6	M6	80
	M3	35	M2	12	M4	8	M4	8	M8	20
	M3	40	M2	16	M4	10	M4	10	M8	30
	M3	45	M2	20	M4	12	M4	12	M8	40
	M3	50	M2.5	5	M4	14	M4	14	M8	50
	M3	60	M2.5	6	M4	16	M4	16	M8	60
	M3	70	M2.5	8	M4	20	M4	20	M8	70
	M4	5	M2.5	10	M4	25	M4	25	M8	80
	M4	6	M2.5	12	M4	30	M4	30	M8	90
	M4	8	M.25	16	M4	35	M4	35	M10	20
	M4	10	M.25	20	M4	40	M4	40	M10	30
	M4	12	M3	4	M4	50	M4	50	M10	40
	M4	16	M3	5	M5	10	M5	10	M10	50
	M4	20	M3	6	M5	12	M5	12	M10	60
	M4	25	M3	8	M5	16	M5	16	M10	70
	M4	30	M3	10	M5	20	M5	20	M10	80
	M4	35	M3	12	M5	25	M5	25	M10	90
	M4	40	M3	16	M5	30	M5	30	M10	100
	M4	45	M3	20	M5	35	M5	35	M12	30
	M4	50	M3	25	M5	40	M5	40	M12	40
	M4	60	M3	30	M5	45	M5	45	M12	50
	M4	65	M3	35	M5	50	M5	50	M12	60
	M4	70	M3	40	M5	60	M5	60	M12	70
	M4	80	M3	50	M5	70	M5	70	M12	80
	M4	90	M4	5	M6	12	M6	12	M12	90
	M4	100	M4	6	M6	14	M6	14	M12	100
	M5	10	M4	8	M6	16	M6	16	M12	110
	M5	12	M4	10	M6	20	M6	20	M12	120
	M5	16	M4	12	M6	25	M6	25	M16	25
	M5	20	M4	16	M6	30	M6	30	M16	30
	M5	25	M4	20	M6	35	M6	35	M16	35
	M5	30	M4	25	M6	40	M6	40	M16	40
	M5	35	M4	30	M6	45	M6	45	M16	50
	M5	40	M4	35	M6	50	M6	50	M16	60
	M5	45	M4	40	M6	55	M6	55	M16	65
	M5	50	M4	45	M6	60	M6	60	M16	80
	M5	60	M4	50	M6	65	M6	65	M16	90
	M5	65	M4	60	M6	70	M6	70	M16	100
	M5	70	M4	70	M6	75	M6	75	M16	130
	M5	75	M5	6	M6	80	M6	80	M16	140

This table continues on next page.

SOCKET HEAD CAP SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
METRIC (mm)	M5	80	M5	8	M6	90	M6	90	M20	40
	M5	100	M5	10	M8	16	M8	16	M20	60
	M5	110	M5	12	M8	20	M8	20	M20	130
	M5	120	M5	16	M8	25	M8	25	M20	140
	M5	130	M5	20	M8	30	M8	30		
	M5	140	M5	25	M8	35	M8	35		
	M6	10	M5	30	M8	40	M8	40		
	M6	12	M5	35	M8	45	M8	45		
	M6	16	M5	40	M8	50	M8	50		
	M6	20	M5	45	M8	55	M8	55		
	M6	25	M5	50	M8	60	M8	60		
	M6	30	M5	60	M8	65	M8	65		
	M6	35	M5	80	M8	70	M8	70		
	M6	40	M5	90	M8	75	M8	75		
	M6	45	M5	100	M8	80	M8	80		
	M6	50	M6	10	M10	16	M10	16		
	M6	55	M6	12	M10	20	M10	20		
	M6	60	M6	16	M10	25	M10	25		
	M6	65	M6	20	M10	30	M10	30		
	M6	70	M6	25	M10	35	M10	35		
	M6	110	M6	30	M10	40	M10	40		
	M6	120	M6	35	M10	45	M10	45		
	M6	130	M6	40	M10	50	M10	50		
	M6	140	M6	45	M10	55	M10	55		
	M6	150	M6	50	M10	60	M10	60		
	M8	12	M6	55	M10	65	M10	65		
	M8	16	M6	60	M10	70	M10	70		
	M8	20	M6	65	M10	75	M10	75		
	M8	25	M6	70	M10	80	M10	80		
	M8	30	M6	75	M10	90	M10	90		
	M8	35	M6	100	M10	100	M10	100		
	M8	40	M6	110	M10	120	M10	120		
	M8	45	M6	120	M12	20	M12	20		
	M8	50	M6	130	M12	25	M12	25		
	M8	55	M6	140	M12	30	M12	30		
	M8	60	M6	150	M12	35	M12	35		
	M8	65	M8	10	M12	40	M12	40		
	M8	70	M8	12	M12	45	M12	45		
	M8	75	M8	16	M12	50	M12	50		
	M8	90	M8	20	M12	55	M12	55		
	M8	100	M8	25	M12	60	M12	60		
	M8	120	M8	30	M12	65	M12	65		
	M8	130	M8	35	M12	70	M12	70		

This table continues on next page.

SOCKET HEAD CAP SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
METRIC (mm)	M8	140	M8	40	M12	75	M12	75		
	M8	150	M8	45	M12	80	M12	80		
	M8	160	M8	50	M12	90	M12	90		
	M8	180	M8	55	M12	100	M12	100		
	M8	200	M8	60	M12	120	M12	120		
	M10	12	M8	65	M12	125	M12	130		
	M10	16	M8	70	M12	130	M12	140		
	M10	20	M8	75	M12	140	M12	150		
	M10	25	M8	80	M12	150	M14	70		
	M10	30	M8	90	M14	70	M14	200		
	M10	35	M8	100	M14	200	M16	30		
	M10	40	M8	110	M16	25	M16	35		
	M10	45	M8	130	M16	30	M16	40		
	M10	50	M8	140	M16	35	M16	45		
	M10	55	M8	150	M16	40	M16	50		
	M10	60	M8	160	M16	45	M16	55		
	M10	65	M8	180	M16	50	M16	60		
	M10	70	M8	200	M16	55	M16	65		
	M10	75	M10	12	M16	60	M16	80		
	M10	80	M10	16	M16	65	M16	90		
	M10	90	M10	20	M16	80	M16	100		
	M10	100	M10	25	M16	90	M16	110		
	M10	110	M10	30	M16	100	M16	120		
	M10	130	M10	35	M16	110	M16	130		
	M10	150	M10	40	M16	120	M16	140		
	M10	180	M10	45	M16	130	M16	160		
	M10	200	M10	50	M16	135	M20	30		
	M12	20	M10	55	M16	140	M20	40		
	M12	25	M10	60	M16	150	M20	45		
	M12	30	M10	65	M16	160	M20	50		
	M12	35	M10	70	M20	30	M20	60		
	M12	40	M10	75	M20	40	M20	70		
	M12	45	M10	80	M20	45	M20	80		
	M12	50	M10	90	M20	50	M20	90		
	M12	55	M10	100	M20	60	M20	100		
	M12	60	M10	110	M20	65	M20	110		
	M12	65	M10	120	M20	70	M20	120		
	M12	70	M10	130	M20	75	M20	140		
	M12	75	M10	140	M20	80	M20	150		
	M12	80	M12	20	M20	90	M20	160		
	M12	90	M12	25	M20	100	M20	180		
	M12	100	M12	30	M20	110	M20	190		
	M12	110	M12	35	M20	120	M24	50		

This table continues on next page.

SOCKET HEAD CAP SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
METRIC (mm)	M12	120	M12	40	M20	130	M24	60		
	M12	130	M12	45	M20	140	M24	70		
	M12	140	M12	50	M20	150	M24	80		
	M12	150	M12	60	M20	160	M24	90		
	M12	160	M12	70	M20	180	M24	100		
	M12	180	M12	80	M20	190	M24	120		
	M12	200	M12	90	M24	50	M24	140		
	M14	25	M12	100	M24	60	M24	150		
	M14	30	M12	110	M24	70				
	M14	40	M12	120	M24	80				
	M14	45	M12	130	M24	90				
	M14	50	M12	140	M24	100				
	M14	55	M12	150	M24	120				
	M14	60	M14	25	M24	140				
	M14	70	M14	30	M24	150				
	M14	80	M14	40						
	M14	90	M14	50						
	M14	100	M14	60						
	M16	20	M14	70						
	M16	25	M14	80						
	M16	30	M14	90						
	M16	35	M14	100						
	M16	40	M16	20						
	M16	45	M16	25						
	M16	50	M16	30						
	M16	55	M16	35						
	M16	60	M16	40						
	M16	65	M16	45						
	M16	70	M16	50						
	M16	75	M16	60						
	M16	80	M16	65						
	M16	90	M16	70						
	M16	100	M16	75						
	M16	110	M16	80						
	M16	120	M16	90						
	M16	130	M16	100						
	M16	140	M16	110						
	M16	150	M16	120						
	M16	160	M16	130						
	M16	180	M16	140						
	M16	200	M16	150						
	M20	40	M20	35						
	M20	45	M20	40						

This table continues on next page.

SOCKET HEAD CAP SCREW (CONTINUED)

THREAD SPECIFICATION	GRADE									
	304 (A2)		316 (A4)		316 (A4-80)		HT 88		HT 109	
	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH	SIZE	LENGTH
IFI 136C										
METRIC (mm)	M20	50	M20	45						
	M20	55	M20	50						
	M20	60	M20	60						
	M20	65	M20	70						
	M20	70	M20	80						
	M20	75	M20	90						
	M20	80	M20	100						
	M20	90	M20	120						
	M20	100	M20	150						
	M20	110	M20	200						
	M20	120	M24	50						
	M20	130	M24	60						
	M20	140	M24	80						
	M20	150	M24	100						
	M20	160								
	M20	180								
	M20	200								
	M24	50								
	M24	60								
	M24	80								
	M24	90								
	M24	100								
	M24	120								
	M24	150								

TYPE 17 SCREWS

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
COUNTERSUNK-6 RIB				
SQUARE DRIVE #2	#10-12	50		
	#10-12	65		
BUGLE BATTEN-4 RIB				
INTERNAL HEX 5 mm	#14-10	35	#14-10	50
	#14-10	50	#14-10	65
	#14-10	65	#14-10	75
	#14-10	75	#14-10	100
	#14-10	100	#14-10	150
SQUARE DRIVE			#6-10	25
			#6-10	32
			#6-10	38
			#6-10	50
			#8-10	25
			#8-10	32
			#8-10	38
			#8-10	50
			#8-10	58
			#8-10	65
			#8-10	75
			#10-10	50
			#10-10	58
			#10-10	65
			#10-10	75
		#12-10	58	
		#12-10	65	
		#12-10	75	
		#14-10	50	
		#14-10	58	
		#14-10	65	
		#14-10	75	
		#14-10	100	
TDX TRIM HEAD-4 RIB				
SQARE DRIVE #1	#7-10	55		
	#10-8	50		
	#10-8	65		
TRIM HEAD-6 RIB				
SQUARE DRIVE #1	#8-10	50		
	#9-9	53		
FLANGED HEX				
AS 3566				
			#12-11	25
			#12-11	50
			#12-11	65
			#14-10	25

THREAD SPECIFICATION	GRADE			
	304 (A2)		316 (A4)	
FLANGED HEX				
AS 3566				
			#14-10	50
			#14-10	65
			#14-10	75
			#14-10	90
HEX HEAD + WASHER				
AS 3566				
			#12-11	25
			#12-11	50
			#12-11	65
			#14-10	25
			#14-10	50
			#14-10	65
			#14-10	75
			#14-10	90
SELF EMBED HEAD				
SQUARE DRIVE			#10-12	40
			#10-12	50
			#10-12	65
			#10-12	75
			#12-10	130
			#12-10	150
BUTTON HEAD				
SQUARE DRIVE #2			#10-12	30
			#10-12	38
			#10-12	44
			#10-12	60

NOTE: Type 17 refers to a commonly used designation for screw points designed for drilling through light gauge steel and timbers.

STAINLESS STEEL INDUSTRY DIRECTORY

As the go-to resource for the stainless steel industry in Australia, the ASSDA Stainless Steel Industry Directory is designed to showcase the services of ASSDA Members while also serving as a platform to connect businesses with potential work opportunities. The below provides details on stainless steel suppliers as per the categories provided in this Stock Guide. For a full listing of stainless steel supply, fabrication and other industry services, please refer to the online Stainless Steel Industry Directory at www.assda.asn.au/stainless-steel-industry-directory.

SUPPLIERS

BAR

A & G Engineering	Edcon Steel	Stainless & Special Metals
Acerinox, S.A	Fagersta Steels	Stattin Stainless
Allmate International Co., Ltd.	HH Stainless	Stirlings Performance Steels
Alleima	Leviat	Valbruna Australia
Atlas Stainless Balustrade & Fabrications	Metal Centre Australia	Vulcan Steel
Atlas Steels	Midway Metals	YC Inox Co., Ltd.
Austral Wright Metals	Outokumpu	Yuen Chang Stainless Steel Co., Ltd.
Australian Stainless Distributors (ASD)	Revolution Advanced Metals & Materials	
Australian Stainless Tube & Imports	Specialty Metals	
Dalsteel Metals	Stainless Bar and Wire Company	

COIL

A & G Engineering	Daming International Import & Export Co., Ltd.	Stirlings Performance Steels
Acerinox, S.A	Fagersta Steels	Vulcan Steel
Allmate International Co., Ltd.	Metal Centre Australia	YC Inox Co., Ltd.
Atlas Stainless Balustrade & Fabrications	Midway Metals	Yieh United Steel Corp.
Atlas Steels	Outokumpu	Yue-Seng Industrial Co., Ltd.
Austral Wright Metals	Specialty Metals	Yuen Chang Stainless Steel Co., Ltd.
Australian Stainless Distributors (ASD)	Stainless & Special Metals	
Dalsteel Metals	Stanch Stainless Steel Co., Ltd.	

FASTENERS

A & G Engineering	Revolution Advanced Metals & Materials
Adnought Sheet Metal Fabrications	Specialty Metals
Atlas Stainless Balustrade & Fabrications	Stainless & Special Metals
AusPress Systems	Stirlings Performance Steels
Australian Stainless Tube & Imports	
AWR Solutions	
Bacsoon Customising	
Bridco	
Edcon Steel	
Geordi Stainless	
Fagersta Steels	
Hobson Engineering	
Leviat	
Low Cost Wire	
Metal Centre Australia	
Miami Stainless	
MM Kembla	

STAINLESS STEEL INDUSTRY DIRECTORY (CONTINUED)

FITTINGS

A & G Engineering	Dalsteel Metals	Outokumpu
A-1 Engineering (VIC)	Ebro Armaturen Pacific	Prochem Pipeline Products
Aflex	Edcon Steel	Revolution Advanced Metals & Materials
Allmate International Co., Ltd.	Fagersta Steels	Ronstan International
Arcus Wire Group	Geordi Stainless	Sepak Industries
Atlas Stainless Balustrade & Fabrications	HH Stainless	Specialised Pipe and Fittings Australia
Atlas Steels	Hobson Engineering	Specialty Metals
AusPress Systems	Leviat	Stainless & Special Metals
Austral Wright Metals	Low Cost Wire	Stattin Stainless
Australian Stainless Distributors (ASD)	Metal Centre Australia	Stirlings Performance Steels
Australian Stainless Tube & Imports	Miami Stainless	Ultibend
AWR Solutions	Midway Metals	Vulcan Steel
Bacsoon Customising	MM Kembla	
Bridco		

FLANGES

A & G Engineering	Metal Centre Australia	Stirlings Performance Steels
Atlas Steels	Midway Metals	TubeSales Stainless
Fagersta Steels	Prochem Pipeline Products	Vulcan Steel
Geordi Stainless	Specialised Pipe and Fittings Australia	
Leviat	Stattin Stainless	

MESH

A & G Engineering	Stainless Steel Wire & Mesh
Arcus Wire Group	Stattin Stainless
Atlas Stainless Balustrade & Fabrications	Stirlings Performance Steels
Atlas Steels	
Australian Stainless Distributors (ASD)	
Australian Stainless Tube & Imports	
Edcon Steel	
Fagersta Steels	
Geordi Stainless	
Midway Metals	
Pipeline Fabrications	
Ronstan International	
Sefar	

STAINLESS STEEL INDUSTRY DIRECTORY (CONTINUED)

PLATE

A & G Engineering	Bacsoon Customising	Specialised Engineering Services (WA)
A-1 Engineering (VIC)	Dalsteel Metals	Specialty Metals
Acerinox, S.A	Daming International Import & Export Co., Ltd.	Stainless & Special Metals
Adnought Sheet Metal Fabrications	Edcon Steel	Stainless Bar and Wire Company
Akras Industries	Fagersta Steels	Stanch Stainless Steel Co., Ltd.
Allmate International Co., Ltd.	Geordi Stainless	Stirlings Performance Steels
Atlas Stainless Balustrade & Fabrications	Metal Centre Australia	Vulcan Steel
Atlas Steels	Midway Metals	YC Inox Co., Ltd.
Austral Wright Metals	Outokumpu	Yieh United Steel Corp.
Australian Stainless Distributors (ASD)	Pipeline Fabrications	Yuen Chang Stainless Steel Co., Ltd.
Australian Stainless Tube & Imports	Revolution Advanced Metals & Materials	

REBAR

Acerinox, S.A	Outokumpu	Valbruna Australia
Atlas Stainless Balustrade & Fabrications	Stainless & Special Metals	Vulcan Steel
Fagersta Steels	Stainless Bar and Wire Company	
Leviat	Stirlings Performance Steels	

SHEET

A & G Engineering	Geordi Stainless	Yuen Chang Stainless Steel Co., Ltd.
A-1 Engineering (VIC)	HH Stainless	
Acerinox, S.A	Metal Centre Australia	
Adnought Sheet Metal Fabrications	Midway Metals	
Allmate International Co., Ltd.	Outokumpu	
Atlas Stainless Balustrade & Fabrications	Revolution Advanced Metals & Materials	
Atlas Steels	Specialised Engineering Services (WA)	
Austral Wright Metals	Specialty Metals	
Australian Stainless Distributors (ASD)	Stainless & Special Metals	
Australian Stainless Tube & Imports	Stainless Bar and Wire Company	
Australian Steel Projects	Stanch Stainless Steel Co., Ltd.	
AWR Solutions	Stattin Stainless	
Bacsoon Customising	Steel Color Australia	
Dalsteel Metals	Stirlings Performance Steels	
Daming International Import & Export Co., Ltd.	Unique Metals Laser	
Edcon Steels	Vulcan Steel	
Fabmetal Specialists	YC Inox Co., Ltd.	
Fagersta Steels	Yue-Seng Industrial Co., Ltd.	

STAINLESS STEEL INDUSTRY DIRECTORY (CONTINUED)

TUBE AND PIPE

A & G Engineering	Edcon Steel	Roladuct Spiral Tubing
A-1 Engineering (VIC)	Fagersta Steels	Specialised Engineering Services (WA)
Adnought Sheet Metal Fabrications	Geordi Stainless	Specialised Pipe and Fittings Australia
Alleima	HH Stainless	Specialty Metals
Allmate International Co., Ltd.	Industrial Tube Manufacturing	Stainless & Special Metals
Atlas Stainless Balustrade & Fabrications	Metal Centre Australia	Stainless Bar and Wire Company
Atlas Steels	Miami Stainless	Stattin Stainless
AusPress Systems	Midway Metals	Stirlings Performance Steels
Austral Wright Metals	MM Kembla	Vulcan Steel
Australian Stainless Distributors (ASD)	Outokumpu	YC Inox Co., Ltd.
Australian Stainless Tube & Imports	Pipeline Fabrications	Yue-Seng Industrial Co., Ltd.
Australian Steel Projects	Prochem Pipeline Products	
Bacsoon Customising	Project Steel Supplies	
Dalsteel Metals	Revolution Advanced Metals & Materials	

WIRE

Acerinox, S.A	Stainless & Special Metals
Arcus Wire Group	Stainless Bar and Wire Company
Atlas Steels	Stainless Steel Wire & Mesh
Austral Wright Metals	Stirlings Performance Steels
Bacsoon Customising	Valbruna Australia
BOC a member of the Linde Group	Vulcan Steel
Bridco	
Dalsteel Metals	
Fagersta Steels	
Low Cost Wire	
Miami Stainless	
Midway Metals	
Outokumpu	
Revolution Advanced Metals & Materials	
Ronstan International	
Specialty Metals	

ADVERTISERS' INDEX

Midway Metals.....	9
Midway Metals.....	11
Emery Industries.....	13
Australian Stainless Distributors	16
Nickel Institute	18
Acerinox.....	20
Dalsteel Metals	22
Tasman Tanks	24
Vulcan	31
Viraj Profiles Private Limited	34
Stainless Bar & Wire Co.....	40
Ronstan Tensile Architecture.....	43
Arcus Wire Group	45
Bridco	49
Stainless Steel Wire and Mesh	55
Arcus Wire Group	61
Ronstan Tensile Architecture.....	63
Atlas Steels	68
Midway Metals.....	70
Australian Pickling and Passivation Service.....	72
Prochem Pipeline Products.....	73
Abrasivestocks.....	75
ASSDA	91
Hobson Engineering	106
Hobson Engineering	118
Hobson Engineering	144

For advertising opportunities with ASSDA including Australian Stainless magazine, please contact ASSDA on 07 3220 0722 or assda@assda.asn.au.



PLATINUM MEMBERS:



GOLD MEMBERS:

- Daming International Import & Export Co., Ltd.
- Prochem Pipeline Products
- Stanch Stainless Steel Co., Ltd
- Stoddart
- YC Inox Co., Ltd.



SILVER MEMBERS:

- Acerinox, S.A \ Amity Pacific \ Aqseptence Group \ Arcus Wire Group \ AusPress Systems \ Austral Wright Metals \ Australian Stainless Distributors \ B&R Enclosures \ Callidus Welding Solutions \ Dalsteel Metals \ Fagersta Steels \ HH Stainless \ Metal Centre Australia \ Outokumpu \ Sanwa \ Stainless Steel Bar & Wire Co \ Stainless Steel Wire & Mesh \ Stirlings Performance Steels \ Yue-Seng Industrial Co., Ltd.